

EcoLink LED T5 Batten



Efficacy 85 lm/w



15K hrs. Lifetime



Lumen Output
300/600/900/1200
1ft/2ft/3ft/4ft



Compliance to all safety
& reliability Standards
IK02/ IP20




Value for Money



Trunkable – Max 10 pcs of 4 ft



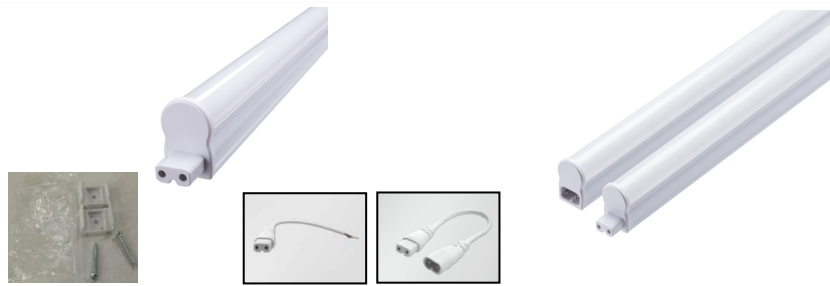

Application: Indirect lighting: cove, cabinet & shop counter;
Direct lighting: general lighting (office/industry/public area)

Features & Benefits:

- Slim and Trunkable,, integrated design**
- One piece PC extrusion housing: Single piece integral design**
- Slim profile: Ideal for task lighting / cove lighting applications**
- Different type can mix and match, flexible in a long length**

Specifications

- Lifetime 15Khrs @L70B50 Ta 25°C
- Lumen output 1200 Lm @L1200
- Working temperature -20 ~ 40°C
- Compliances CB and CB/EMC
- Input Voltage 220-240V 50/60 Hz
- Class II
- PF 0.5
- Accessory Bracket and Screws

	Description	Specification	
O p t i c a l	SKU Available	L300, L600, L900, L1200	
	Lumen Output	300lm/600lm/900lm/1200lm@4000K	
	lumen output tolerance (+/-)	+20%/-10%	
	CRI	≥70	
	CCT	3000K/4000K/6500K	
	SDCM	≤7	
	Input Voltage and Frequency	220-240V, 50/60Hz	
	Safety Class (driver+system)	Class II	
	Power Factor (system)	0.5	
	Power consumption (system)		13W@L1200
			9.6W@L900
			6.5W@L600
			3.4W@L300 (±10%)
System Efficacy		85lm/W(+20%, -10%)	
Ripple		Ripple current<30%	

M e c h a n i c a l	Housing material	PC	
	Cover material (Diffuser)	PC	
	IPxx	IP20	
	IKxx	IK02	
	Glow wire rating	Follow IEC60598	
	Mounting	Surface (Mounting bracket included in the box)	
	Cable	NA	
	Size (LxWxH) + considerations		325x21x32.3(mm)/585x21x32.3(mm) /885x21x32.3(mm)/1185x21x32.3(mm) tolerance : ±2 mm
		Packaging concept	1 in 1 with Single color printing (Mounting bracket and MI included in the box) /24 in 1 brown box
	Operating temperature range		-20°Cto +40°C
	Lifetime		15K hrs @ L70 B50 @Ta 25C

Ecolink T5 Batten: B5007C Accessories



2x plastic brackets, 2x screw
-1x plastic bag
Included in Packaging

911401585531: BN058Z MB (2PCS)

Mounting Clips




Drive Max 8 Pcs of Fixture in one
Circuit
**Purchase separately.
Not Included in Packaging**

Power Cable

911401849780	B5007 Mains cable
--------------	-------------------



connect two battens in non linear
coves.
**Purchase separately.
Not Included in Packaging**

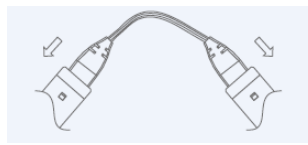

Link Cable

911401849880	B5007 Interconnecting Cable
--------------	-----------------------------

Ecolink T5 Batten: B5007C

Different form factor Vs Philips brand BN058



BN058



B5007