



Built-in
Surge Protector



Die-Cast Aluminium


Material

IP65



Life Span
30,000 hrs

Adjustable CCT Switch
3000K-4000K-6500K

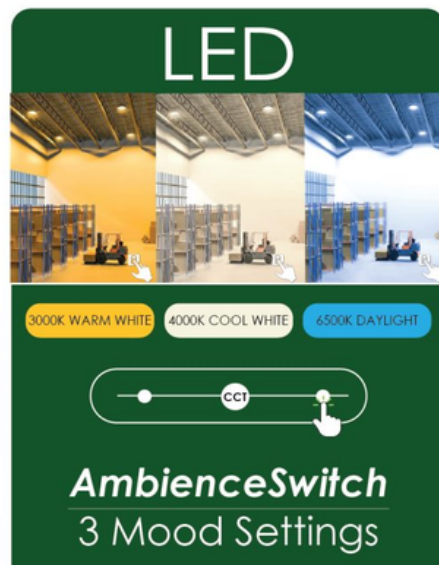

Wattage	100W	150W	200W	300W
Light Source	SMD LED			
Lumen	13000lm	19500lm	26000lm	39000lm
Casing Material	Die-Cast Aluminium			
Surge Protector	4kV/6kV/8kV/10kV			
Correlated Color Temp. (CCT)	3 CCT			
Color Rendering Index (CRI)	≥80			
Power Factor	≥0.9			
Beam Angle	90°			
Ingress Protection (IP)	IP65			
Operating Temperature	-20°C~+50°C			
Input Voltage	AC220-240V~50/60Hz			
Carton (pcs)	10	10	5	5

Measurement (mm)

Wattage	A	B	C
100W	Ø270	56.1	91.1
150W	Ø300	61.5	96.5
200W	Ø330	68.2	103.2
300W	Ø371.9	73.4	108.4

