

**fuhrmeister**




F i l t e r l ü f t e r  
S e r i e D

Die Schaltschrank-Filterlüfter der Serie D aus UV-beständigem Kunststoff (PC/ABS, Farbton RAL 7035) können überall dort eingesetzt werden, wo die Temperatur der Umgebungsluft ausreicht, um elektronische Komponenten abzukühlen. Die Montage kann sowohl mit Clips als auch mit Schrauben erfolgen, der Filtermattenwechsel ist problemlos jederzeit werkzeuglos von vorne möglich. Bei fachgerechter Montage bleibt die Gehäuseschutzart bis IP54 erhalten.


The Filter Fans of series D out of UV plastic (PC/ABS Colour RAL 7035) are designed for environments, where the forced cooling with the ambient air is sufficient for the cooling of electrical components. The mounting could be done either with the built-in clips or with screws. The change of filter can be done anytime without any tool from the front side. If mounted correctly, the enclosure protection grade of up to IP54 is obtained.



- Easy-Filterwechsel, werkzeuglos
- Schnellmontage ohne Schrauben
- Flacher Aufbau, nur 9mm
- Ein Ausschnitt für 560, 630 und 940m³/h oder 330W Kühlgerät
- Eingepresste Dichtung
- Weitere Spannungen wie z.B. 115VAC, 12VDC oder 48VDC lieferbar
-  us Varianten verfügbar

- Easy filter change, tool-free
- Quick mounting without screws
- Flat structure, only 9mm
- One cutout for 560, 630 and 940m³/h or 330W cooling unit
- Pressed seal
- Other voltages such as 115VAC, 12VDC or 48VDC are available
-  us Versions available

Filterlüfter Filter Fans	Type Model	Luftleistung freiblasend Air flow rate free blow	Spannung Voltage	Ausschnitt Cutout	Abmessungen Dimensions
Bestell.-Nr./Order-No.		m³/h	V, Hz	B x H (mm)	B x H x T (mm)
20.INDX.F001.0101	FC-IND-F001	10/12	230 AC, 1~, 50/60	92 x 92	112 x 112 x 70
20.INDX.F004.0108	FC-IND-F004	40	24 DC	92 x 92	112 x 112 x 70
20.INDX.F004.0101	FC-IND-F004	44/46	230 AC, 1~, 50/60	124 x 124	150 x 150 x 71
20.INDX.F005.0108	FC-IND-F005	50	24 DC	124 x 124	150 x 150 x 71
20.INDX.F010.0101	FC-IND-F010	100/105	230 AC, 1~, 50/60	177 x 177	205 x 205 x 106
20.INDX.F014.0108	FC-IND-F014	140	24 DC	177 x 177	205 x 205 x 106
20.INDX.F016.0101	FC-IND-F016	160/190	230 AC, 1~, 50/60	224 x 224	252 x 252 x 119
20.INDX.F023.0101	FC-IND-F023	230/270	230 AC, 1~, 50/60	224 x 224	252 x 252 x 119
20.INDX.F034.0108	FC-IND-F034	340	24 DC	224 x 224	252 x 252 x 119
20.INDX.F056.0101	FC-IND-F056	560/600	230 AC, 1~, 50/60	292 x 292	325 x 325 x 149
20.INDX.F063.0101	FC-IND-F063	630/690	230 AC, 1~, 50/60	292 x 292	325 x 325 x 149
20.INDX.F094.0101	FC-IND-F094	940/1020	230 AC, 1~, 50/60	292 x 292	325 x 325 x 191

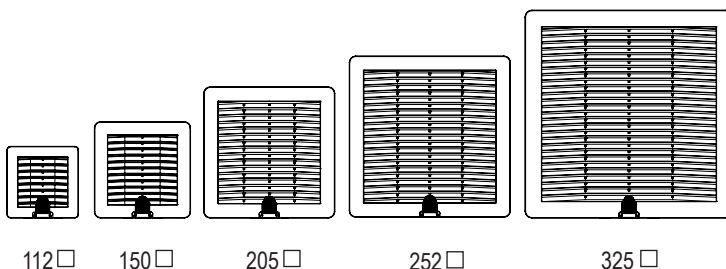

Austrittsfilter / Filter Bestell.-Nr. / Order-No.	Type Model	Abmessungen Dimensions
20.INDX.F112.0100	FC-IND-F112	112 x 112 x 28
20.INDX.F150.0100	FC-IND-F150	150 x 150 x 28
20.INDX.F205.0100	FC-IND-F205	205 x 205 x 28
20.INDX.F252.0100	FC-IND-F252	252 x 252 x 29
20.INDX.F325.0100	FC-IND-F325	325 x 325 x 29