

HS-200 Temperature Sensor


RTD PT100 temperature output via 2 Pin MS Connector

Key Features


- PT100 Temperature output
- For use with data collector
- Customisable features

Industries

Building services, Pulp and Paper, Mining, Metals, Utilities, Automotive, Water, Pharmaceutical

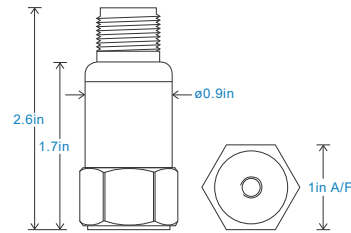

Connection Details



Technical Performance

Temperature Output	PT100 (100 Ohms)
Isolation	Base isolated

Mechanical

Case Material	Stainless Steel
Mounting Torque	5.9ft. lbs
Weight	4.4 oz. (nominal) body only
Shielded Cable Assembly Connector	see: www.hansfordsensors.com for options HS-AA004 - non-booted HS-AA053 or HS-0054 - booted
Mounting Threads	see: 'How To Order' table

Electrical


Environmental

Operating Temperature Range	see: 'How To Order' table
Sealing	IP68
EMC	EN61326-1:2013


Applications

Fans, Motors, Pumps, Compressors, Centrifuges, Conveyors, Air Handlers, Gearboxes, Rolls, Dryers, Presses, Cooling, VAC, Spindles, Machine Tooling, Process Equipment

Vibration sensor should be firmly fixed to a flat surface (spot face surface may be needed to be produced and cable anchored to sensor body.)



How To Order

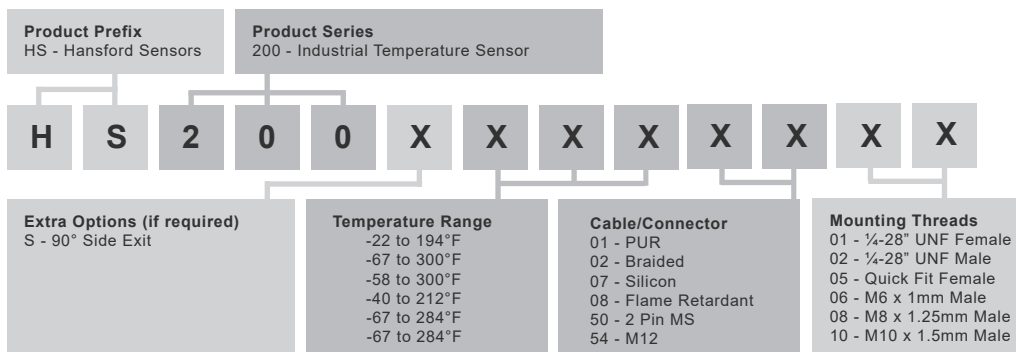

www.hansfordsensors.com
sales@hansfordsensors.com

We reserve the right to alter the specification of this product without prior notice
TS463U.3

