

HS-173T Premium Triaxial Accelerometer


Three AC and temperature outputs via M12 Connector

Key Features

- Temperature Output
- Output via three axes
- For use with data collector
- Customisable features

Industries

Building services, Pulp and Paper, Mining, Metals, Utilities, Automotive, Water, Pharmaceutical

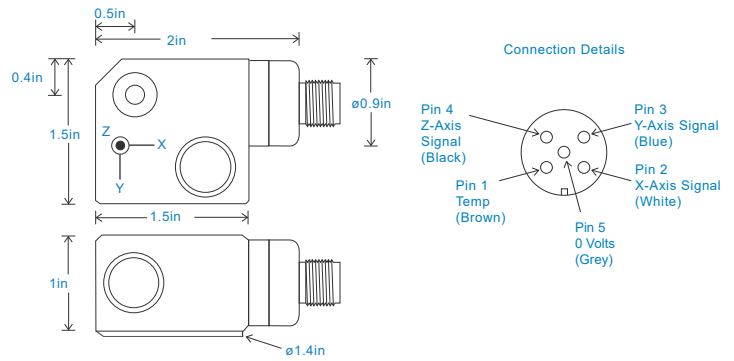

Technical Performance

Mounted Base Resonance	see 'How To Order' table (nominal) +3kHz for aluminium version
Sensitivity	see: 'How To Order' table $\pm 10\%$ Nominal 80Hz at 72°F per axes
Frequency Response	120cpm (2Hz) to 600kcpm (10kHz) $\pm 5\%$ 90cpm (1.5Hz) to 720kcpm (12kHz) $\pm 10\%$ 48cpm (0.8Hz) to 900kcpm (15kHz) $\pm 3dB$
Isolation	Base isolated
Range	see: 'How To Order' table
Temperature Output	10mV/°C
Transverse Sensitivity	Less than 5%

Mechanical

Case Material	Stainless Steel unless specified Aluminium
Sensing Element/Construction	PZT/Shear
Mounting Torque	5.9ft. lbs
Mounting Bolt Provided	see: 'How To Order' table x 1.2in long
Weight	8.3 oz. (nominal) *if Stainless Steel
Screened Cable Assembly	HS-AC303 - straight HS-AC032 - right angle
Mounting Threads	see: 'How To Order' table


Electrical

Electrical Noise	0.1mg max
Current Range	0.5mA to 8mA
Bias Voltage	10 - 12 Volts DC
Settling Time	1 second
Output Impedance	200 Ohms max.
Case Isolation	$>10^8$ Ohms at 500 Volts

Environmental

Operating Temperature Range	-67 to 266°F
Sealing	IP67
Maximum Shock	5000g
EMC	EN61326-1:2013


Typical Frequency Response (at 100mV/g)

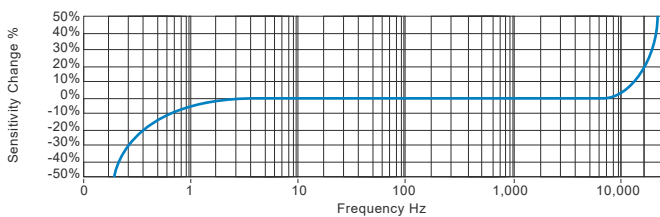

Applications

Fans, Motors, Pumps, Compressors, Centrifuges, Conveyors, Air Handlers, Gearboxes, Rolls, Dryers, Presses, Cooling, VAC, Spindles, Machine Tooling, Process Equipment

Vibration sensor should be firmly fixed to a flat surface (spot face surface may be needed to be produced and cable anchored to sensor body.)



How To Order

Product Prefix	Product Series	Product Code												
HS - Hansford Sensors	173 - Triaxial Industrial Vibration Sensor	H	S	1	7	3	T	X	X	X	X	X	X	X
Extra Options (if required)	Sensitivity	Range	Resonant Frequency	Cable/Connector	Mounting Threads									
AL - Aluminium Material	010 - 10mV/g	$\pm 800g$	20kHz (1,800kcpm)	53 - 5 Pin M12	02 - ¼-28" UNF Male									
F - Filtered	030 - 30mV/g	$\pm 250g$	19kHz (1,680kcpm)		06 - M6 x 1mm Male									
RT - Temperature Output PT100	050 - 50mV/g	$\pm 160g$	18kHz (1,560kcpm)		08 - M8 x 1.25mm Male									
T - Temperature Output	100 - 100mV/g	$\pm 80g$	17kHz (1,440kcpm)											
	250 - 250mV/g	$\pm 32g$	16kHz (1,320kcpm)											
	500 - 500mV/g	$\pm 16g$	15kHz (1,200kcpm)											



www.hansfordsensors.com
sales@hansfordsensors.com

We reserve the right to alter the specification of this product without prior notice
TS825U.1

