



## OML 343UNI



Type OML 343UNI is a multifunction instrument with the option of configuration for 8 different input options, easily configurable in the instrument menu. Depth of the instrument box only 30 mm.

The instrument is based on a single-chip microcontroller with an A/D converter, which ensures good accuracy, stability and easy operation of the instrument.

### UNIVERSAL INSTRUMENT

- 3,5-digit programmable projection
- Multifunction input (DC, PM, RTD, T/C, DU)
- Digital filters, Linearization, Tare
- Size of DIN 96 x 48 mm
- Power supply 10...30 VDC/24 VAC
  
- Option  
Comparator

### OML 343UNI

DC VOLTMETER AND AMMETER  
PROCESS MONITOR  
OHMMETER  
THERMOMETER FOR PT/CU/NI/THERMOCOUPLES  
DISPLAY UNIT FOR LINEAR POTENTIOMETERS

### OPERATION

The instrument is set and controlled by five buttons accessible from the rear. All programmable settings of the instrument may be performed in three adjusting modes:

**LIGHT MENU** is protected by optional number code and contains solely items necessary for instrument setting.

**PROFI MENU** is protected by optional number code and contains complete instrument setting.

**USER MENU** may contain arbitrary items from the programming menu (LIGHT/PROFI), which determine the right (see, change). Access w/o password.

Standard equipment is the OM Link interface, which together with operation program enables modification and filing of all instrument settings as well as performing firmware updates (with OML cable). The program is also designed for visualization and filing of measured values from more instruments.

All settings are stored in the EEPROM memory (settings hold even after the instrument is switched off).

### OPTION

**COMPARATOR** is assigned to monitor two limit values with relay output. The limits have adjustable hysteresis within the full range of the display as well as selectable delay of the switch-on in the range of 0...99,9 s. Reaching the preset limits is signalled by LED and simultaneously by the switch-on of the relevant relay.

### STANDARD FUNCTIONS

#### PROGRAMMABLE PROJECTION

Selection: of input type and measuring range

Setting: manual, optional projection on the display may be set in menu for both limit values of the input signal, e.g. input 0...10 V > 0...150,0

Projection: ±1999

#### COMPENSATION

Of conduct (RTD): automatic (3- or 4-wire) or manual in menu (2-wire)

Of conduct in probe (RTD): internal connection (conduct resistance in measuring head)

Of CJC (T/C): manual or automatic, in menu it is possible to perform selection of the type of thermocouple and compensation of cold junctions, which is adjustable or automatic

#### FUNCTIONS

Linearization: through linear interpolation in 25 points (solely via OM Link)

Tare: designed to reset display upon non-zero input signal

#### DIGITAL FILTERS

Exponential average: from 2...100 measurements

Rounding: setting the projection step for display

#### EXTERNAL CONTROL

Hold: display/instrument blocking

Tare: tare activation

## TECHNICAL DATA

| INPUT      |                      |  |
|------------|----------------------|--|
| <b>DC</b>  | Range                | optional in configuration menu                   |
|            |                      | ±90 mA < 1 V Input 5                             |
|            |                      | ±180 mA < 2 V Input 5                            |
|            |                      | ±30 mV > 10 MΩ Input 3                           |
|            |                      | ±60 mV > 10 MΩ Input 3                           |
|            |                      | ±1000 mV > 10 MΩ Input 3                         |
|            |                      | ±20 V 1 MΩ Input 1                               |
|            |                      | ±40 V 1 MΩ Input 1                               |
|            |                      | ±80 V 1 MΩ Input 1                               |
| <b>PM</b>  | Range                | optional in configuration menu                   |
|            |                      | ±20 mA < 200 mV Input 5                          |
|            |                      | 4...20 mA < 200 mV Input 5                       |
|            |                      | ±2 V 1 MΩ Input 1                                |
|            |                      | ±5 V 1 MΩ Input 1                                |
|            |                      | ±10 V 1 MΩ Input 1                               |
| <b>OHM</b> | Range                | optional in configuration menu                   |
|            |                      | 0...100 Ω  |
|            |                      | 0...300 Ω  |
|            |                      | 0...1.5 kΩ                                       |
|            |                      | 0...3 kΩ   |
|            |                      | 0...24 kΩ  |
|            | Connect.             | 2, 3 or 4 wire                                   |
| <b>RTD</b> | Type                 | optional in configuration menu                   |
|            |                      | EU > 100/500/1000 Ω, with 3 850 ppm -50°...450°C |
|            |                      | US > 100 Ω, with 3 920 ppm/C -50°...450°C        |
|            |                      | RU > 50 Ω with 3 910 ppm/C -200°...1100°C        |
|            |                      | RU > 100 Ω with 3 910 ppm/C -200°...450°C        |
|            | Connect.             | 2, 3 or 4 wire                                   |
| <b>Ni</b>  | Type                 | optional in configuration menu                   |
|            |                      | Ni 1000/10 000 with 5 000 ppm/C -50°...250°C     |
|            |                      | Ni 1000/10 000 with 6 180 ppm/C -200°...250°C    |
|            | Connect.             | 2, 3 or 4 wire                                   |
| <b>Cu</b>  | Type                 | optional in configuration menu                   |
|            |                      | Cu 50/100 with 4 260 ppm/C -50°...200°C          |
|            |                      | Cu 50/100 with 4 280 ppm/C -200°...200°C         |
|            | Connect.             | 2, 3 or 4 wire                                   |
| <b>T/C</b> | Type                 | optional in configuration menu                   |
|            |                      | J (Fe-CuNi) Input 3 -200°...900°C                |
|            |                      | K (NiCr-Ni) Input 3 -200°...1300°C               |
|            |                      | T (Cu-CuNi) Input 4 -200°...400°C                |
|            |                      | E (NiCr-CuNi) Input 3 -200°...690°C              |
|            |                      | B (PtRh30-PtRh6) Input 4 300°...1820°C           |
|            |                      | S (PtRh10-Pt) Input 4 -50°...1760°C              |
|            |                      | R (Pt13Rh-Pt) Input 4 -50°...1740°C              |
|            |                      | N (Omegalloy) Input 3 -200°...1300°C             |
|            |                      | L (Fe-CuNi) Input 3 -200°...900°C                |
| <b>DU</b>  | Potent. power supply | 2.5 VDC/6 mA, Potentiometer resistance > 500 Ω   |

|  |                     |
|--|---------------------|
| External input                           | 1 input, on contact |
| The following functions can be assigned: |                     |
| OFF                                      | input off           |
| HLD.                                     | display stop        |
| TAR.                                     | tare activation     |

| PROJECTION     |  |
|----------------|--|
| Display:       | ±1999, single color 7-segment LED        |
| Digit height:  | 14 mm                                    |
| Display color: | red or green                             |
| Decimal point: | adjustable - in menu                     |
| Brightness:    | adjustable or automatically controllable |

| INSTRUMENT ACCURACY                |   |
|------------------------------------|---|
| TK:                                | 50 ppm/C  |
| Accuracy:                          | ±0.15% of range + 1 digit   |
| ±0.3% of range + 1 digit           |   |
| Accuracy of cold junction measur.: | ±1.5°C  |
| Rate:                              | 0.5...20 measur./s  |
| Overload capacity:                 | 2x; 10x (t < 30 ms)   |
| Resolution:                        | 0.1°C (RTD), 1°C (T/C)  |
| Line compensation:                 | max. 30 Ω (RTD)   |
| Cold junction compens.:            | adjustable -20°...99°C or automatic   |
| Linearization:                     | linear interpol. in 25 points (only via OM Link)                                  |
| Digital filters:                   | exponential average, rounding   |
| Functions:                         | Tare  |
| OM Link:                           | Company communication interface for operation, setting and update of instruments. |
| Watch-dog:                         | reset after 500 ms  |
| Calibration:                       | at 25°C and 40 % r.h.   |

T/C

| COMPARATOR       |  |
|------------------|--|
| Type:            | digital, menu adjustable, contact switch-on < 50 ms  |
| Hysteresis mode: | switching limit, hysteresis band „Lim ±1/2Hys.“ and time (±99.9 s) determining the switching delay |
| Output:          | 1x Form A relay (250 VAC/30 VDC, 3 A), 1x open collector (30 VDC/100 mA)                           |

| POWER SUPPLY |   |
|--------------|---|
| Range:       | 10...30 VDC/24 VAC, ±10 %, PF ≥ 0.4, I <sub>STP</sub> < 45 A/1 ms, isolated |
| Consumption: | < 1.8 W/1.9 VA  |

| MECHANIC PROPERTIES |  |
|---------------------|--|
| Material:           | Polycarbonate, incombustible UL 94 V-0 |
| Dimensions:         | 96 x 48 x 30 mm (w x h x d)            |
| Panel cutout:       | 92 x 44 mm (w x h)                     |

## OPERATING CONDITIONS

Connection: connector terminal blocks, section < 1.5 mm<sup>2</sup>

Stabilization period: within 5 minutes after switch-on

Working temperature: -20°...60°C

Storage temperature: -20°...85°C

Protection: IP65 (front panel only with a gasket)

El. safety: EN 61010-1, A2

Dielectric strength: 2.5 kVAC per 1 min test between supply and input

4 kVAC per 1 min test between input and relay output


Insulation resistance: for pollution degree II, measuring cat. III

power supply > 300 V (PI)

input, output > 300 V (DI)

EMC: EN 61326-1

## CONNECTION

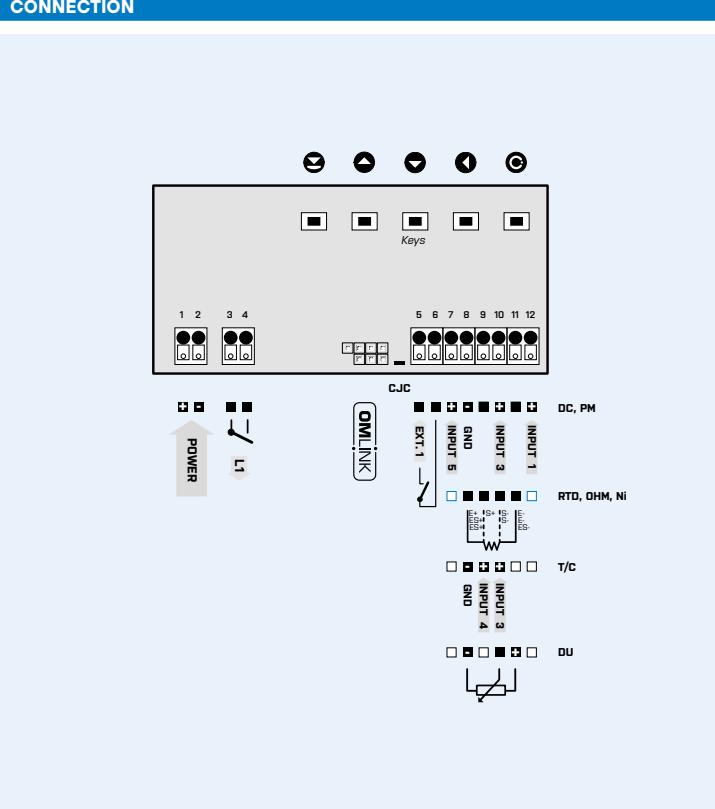

## ORDER CODE

**OML 343UNI**

-    -

|               |  |    |
|---------------|--|----|
| Comparator    | no   | 0  |
|               | 1x relay (Form A)                            | 1  |
|               | 1x open collector                            | 2  |
| Display color | red  | 1  |
|               | green  | 2  |
| Gasket        | no   | 0  |
|               | Silicone gasket between instrument and panel | 1  |
| Specification | customized version, do not fill in           | 00 |

Basic configuration of the instrument is indicated in bold.