


HS-580 Module Enclosure

Polycarbonate

Key Features

- Isolated Mains Power Supply
- For use with all HS-500 Series
- Short Circuit Protected
- Safety to UL1310 Class II

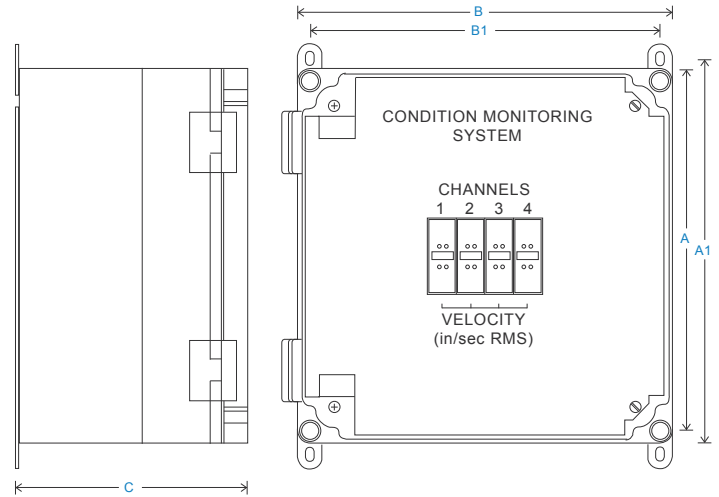


Technical Performance

Input Voltage Range	85 to 260 VAC
Output Voltage Range	24 VDC
Output Power	2 Amps
Case Material	Polycarbonate
Mounting	DIN Rail TS35 (Top Hat)
Dimensions	see: 'How To Order' table
Connections	Screw Clamp
Conductor Size	0.02 to 0.2 in
Weight	9.1 oz. (nominal)

Environmental

Operating Temperature Range	32 to 131°F
Sealing	NEMA 4X (excluding fans)
Cooling	Two fans
Relative Humidity	20 to 90% RH
EMC	EN61326-1:2013
Installation Category (IEC664)	II
Equipment Class (IEC536)	III

How To Order

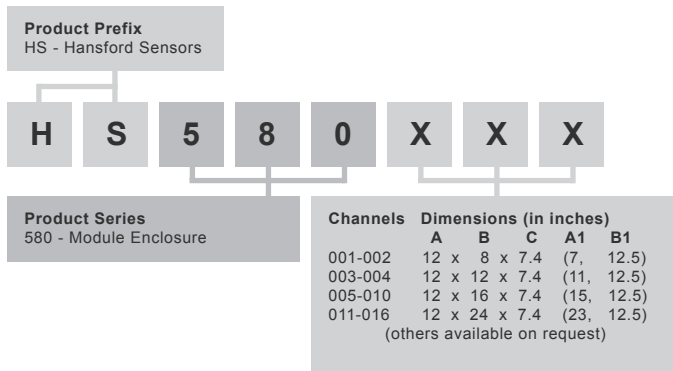

Accessories

- HS-590 - Flashing Beacon & Siren Module
- HS-591 - Flashing Beacon
- HS-592 - Siren Module



www.hansfordsensors.com
sales@hansfordsensors.com

We reserve the right to alter the specification of this product without prior notice
TS109U.2

