


HS-SE-SRM Switching Enclosure

Stainless Steel with protective roof

Key Features


- Protective roof to stop dust and dirt settling
- BNC and 2 Pin MS output
- Provides a terminal to take readings from accelerometers via a portable data-collector
- Multiple outputs via one connector
- Easy to install

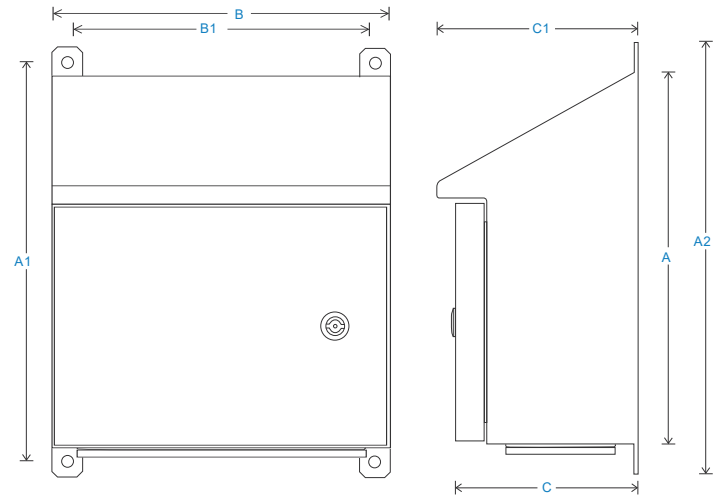

Technical Performance

Inputs	Via accelerometer	Door	Lock and polyamide key
Output	BNC and 2 Pin MS as standard	Glanding	Glands supplied but not fitted
Mounting Board	PCB Panel		Holes are punched for:
	(customisable upon request)		Single input M12 - \varnothing 0.1-0.3in cable
Material	304 Stainless Steel (to be specified in options of 'How To Order' table)		Single input M20 - \varnothing 0.3-0.7in multi-core cable
			Multi input M20 - 3 x \varnothing 0.2in
Dimensions	see: diagram	Labelling	Channel locations - other
Termination	Spring-loaded terminal (no screwdriver required)	Mounting	labelling available upon request
Sealing	NEMA 4X	EMC	supplied are 4 x Brackets EN61326-1:2013

How To Order

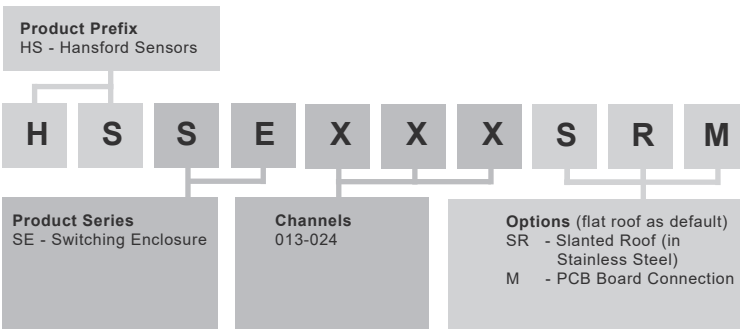

www.hansfordsensors.com
sales@hansfordsensors.com



We reserve the right to alter the specification of this product without prior notice
TS1028U