


HS- SESSMMO Switching Enclosure

Stainless Steel - with outputs for online expansion


Key Features

- Continuous BNC and 2 Pin MS connector
- Multiple Outputs via one connector
- Terminals for online expansion
- Provides a terminal to take readings from accelerometers via a portable data-collector


6 Way



12 Way

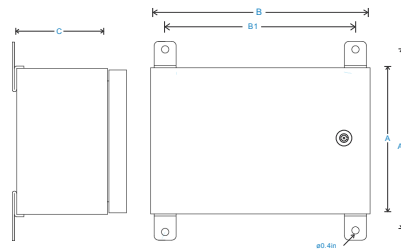

16 Way

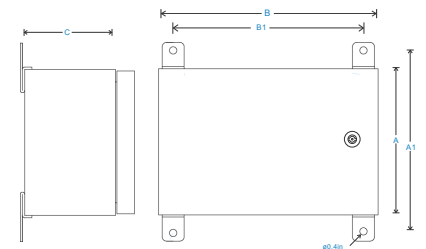

Technical Performance

Inputs	Via accelerometer	Door	Lock and polyamide key
Output	BNC and 2 Pin MS as standard	Glanding	Glands supplied but not fitted
			Holes are punched for:
Mounting Board	PCB Panel		Single input M12 - $\varnothing 0.1-0.3$ in cable
			Single input M20 - $\varnothing 0.3-0.7$ in multi-core cable
Material	304 Stainless Steel		Multi input M20 - 3 x $\varnothing 0.2$ in
		Labelling	Channel locations - other
Termination	Quick-release terminal		labelling available upon request
Dimensions	see: 'How To Order' table	Mounting	supplied are 4 x Brackets
Sealing	IP66	EMC	EN61326-1:2013

How To Order

