


HS-CE-PCM Connection Enclosure

Polycarbonate

Key Features


- Provides a terminal to take readings from accelerometers via a portable data-collector
- Multiple outputs via multiple connectors

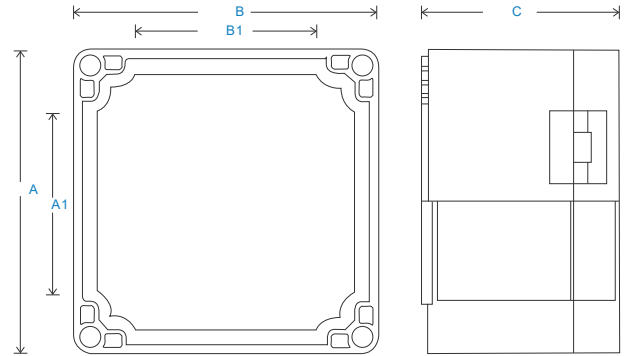

Technical Performance

Inputs	Via accelerometer	Door	Catches
Output	BNC as standard (alternatives can be specified in 'How To Order' table)	Glanding	Glands supplied but not fitted
Mounting Board Material	PCB Mounted Polycarbonate (to be specified in options of 'How To Order' table)	Single input M12 - \varnothing 0.1-0.3in cable	Holes are punched for:
Dimensions	see: 'How To Order' table	Single input M20 - \varnothing 0.3-0.5in multi-core cable	Multi input M20 - 3 x \varnothing 0.2in
Sealing	NEMA 4X	Labelling	Channel locations - other labelling available upon request
Termination	Spring loaded terminal	Mounting	supplied are 4 x Brackets
		EMC	EN61326-1:2013

How To Order

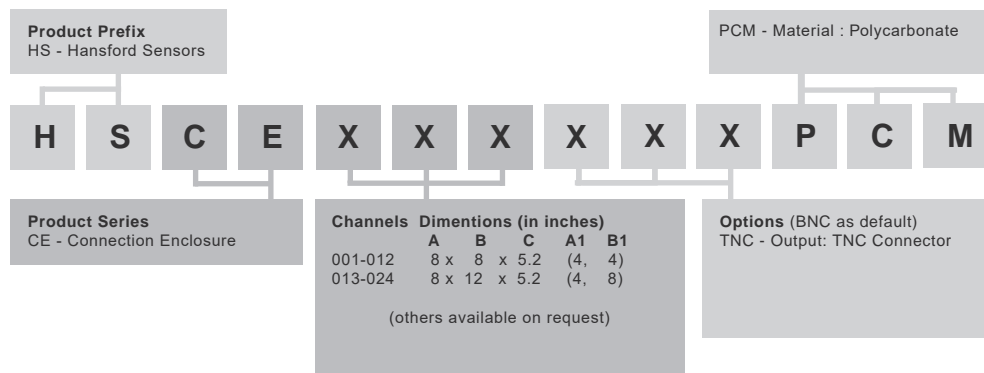

www.hansfordsensors.com
sales@hansfordsensors.com

We reserve the right to alter the specification of this product without prior notice
TS345U.5

