

# ORANGE PUMP CHM4-4ES C/W 230V 1HP 750KW 50HZ MOTOR




## Applications Fields

- Air conditioning system
- Filling machinery
- Water supply and pressurization system
- Cooling system
- Industrial cleaning
- Aquaculture
- Water treatment application
- Support use of chiller
- Family water supply

## Applications Limits

Thin, clean, non-combustible, and non explosive liquid containing no solid particle or fiber  
 Applicable to deliver tap water, alkaine mineral water, softened water or mildly-corrosive medium  
 The use of a large-power motor must be considered when the density or viscosity of the medium delivered is higher than that of water  
 Medium temperature: 0°C-70°C for normal temperature type: 0°C~120°C for hot water type  
 Ambient temperature: 0°C-+50°C

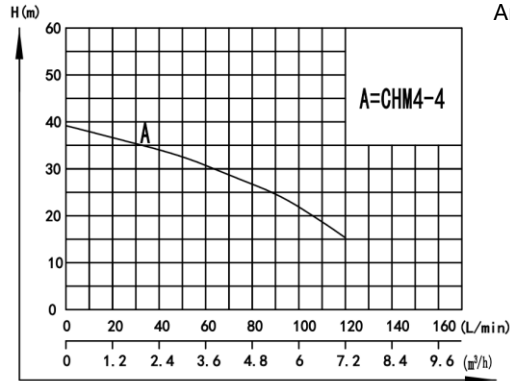

## Pump Performance

Model	POWER		Discharge head in metres ( For kPa*10)								Pipe	
	HP	KW	Voltage	5	10	15	20	25	30	35		40
	Capacity in litres per minute											
CHM4-4ES	1	0.75	230				100	88	63	32	1.25" *1"	

Model	Dim(mm)											DN1	WEIGHT
	A	B	C	D	E	F	G	L	H1	H2	H3	Inch	
CHM4-4ES	112	140	180	93	125	180	104	354	75	209	266	1.25	11KG

