




Model SF50

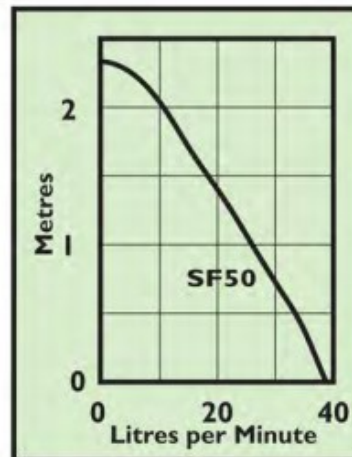

Max head 2.3 M - Max flow 38 lpm

FEATURES:

1440 RPM 4 Pole Motor for Continuous Use

- Submersible Sump Pump 230 Volt 80 watts.
 - Maximum head 2.3 metres
 - Maximum flow 38 litre per minute.
 - 140mm wide 220mm high weight 3kg
 - Triple seals-Oil bath chamber.
 - Anti-Clog Vortex impeller
 - 3M electrical lead
 - Manual operated
 - 1440rpm slow speed
 - Ultra-quiet operation
 - Discharge port: 12mm
 - Can handle solids up to 3mm
- Applications:
 - Storm water draining, cellars, sumps, water feature or rain harvesting.
 - Grey water, sullage, hair or silt in 90% water.
 - Water feature or treatment system
 - Fountain pump/installation
 - Water to be pumped cannot exceed 45°C
 - Standing water level must not exceed 3m above pump
 -

