




Orange CP600, CP700 & CP800 Centrifugal Pumps

No.	Description	
1.	Max. Water temperature	-
2.	Suction and Discharge port	2" BSP (in) 1 ½ (out)
3.	Solid Cast Iron casing and Stainless Steel shaft	Yes
4.	Neoprene Mechanical Seal Carbon/Ceramic Wearface	Yes
5.	Motor thermal protection TEFC , IP55	Yes
6.	Non Corrosive Impeller	(Nylon) moulded sonic welded with seal flushing vane

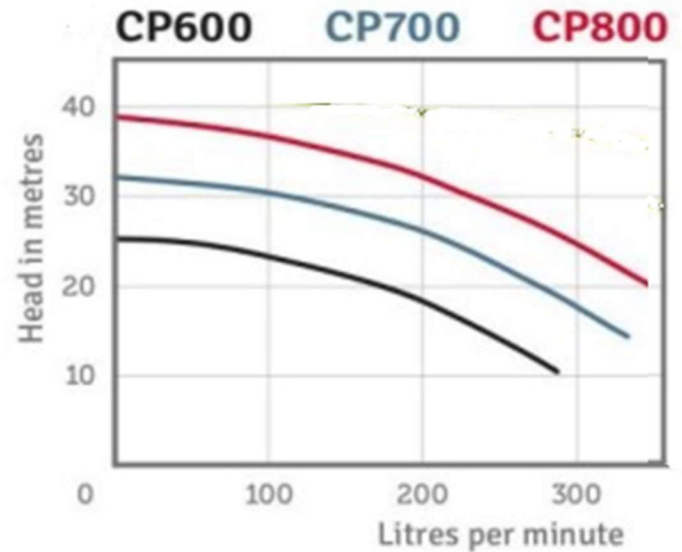

MODEL	Power	Head (Meter)	5	10	15	20	25	30
CP600	1100W			290	240	170		
CP700	1500W			360	320	280	210	100
CP800	2400W			400	390	325	300	230