






LATEST PRODUCTS
Great Breakthrough


**Variable Frequency,
Maximum Performance**



70% 
ENERGY SAVING
LOW NOISE CLEAN WATER

Liquid Temperature Range: 0°C to 100°C
Material Temperature Resistance: -40°C to 130°C
Max. Suction: +9.5m
Insulation Grade: Class H
Weatherproof protection: IP65

-  Flow & Pressure Control
-  Low Noise
-  Energy Saving
-  Safe & Durable
-  Hi-Speed PM Motor

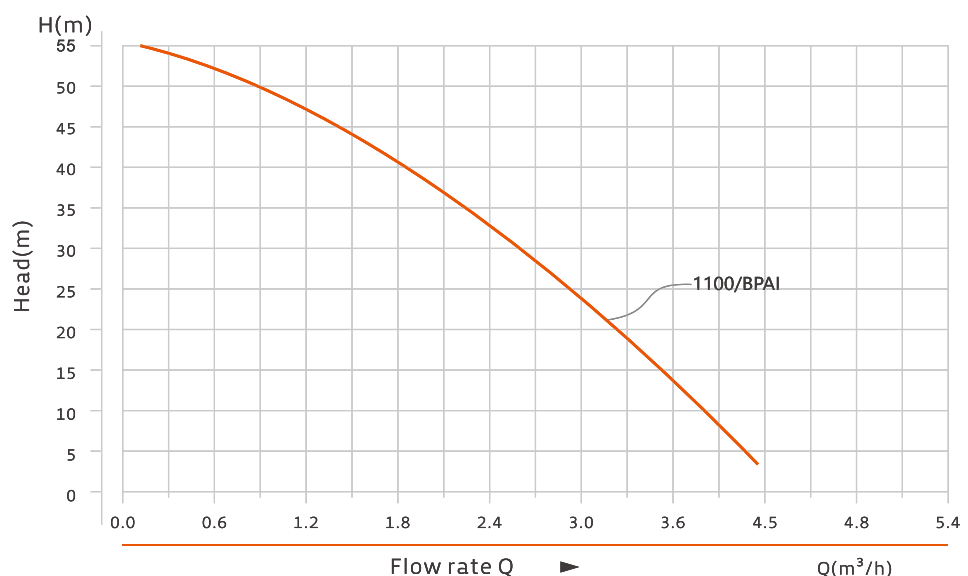

Model	Output Voltage (V)	Power (W)	Max.flow (m³/h)	Max.flow (L/min)	Max. head (m)	Max.suction (m)	Inlet&Outlet (inch)
1100/BPAI/C/H52-Q4.8	DC48+48	432	4.8	80	52	9.5	1"x1"



LATEST PRODUCTS
Exclusive Patent

Product Feature

1. Input voltage: 160-240V, 50/60Hz
Output voltage: DC24-60V, human safe voltage
2. Constant water pressure, providing a better water experience for you
3. Auto-adaptive function
Automatically identify the pipe pressure
Automatically regulate the starting pressure
4. Permanent Magnet Motor
lifetime: 30,000 hours; speed: 12,000 rpm
5. Anti-freezing & pressure resistance
6. Low noise: 20-30dB
7. Food grade plastic: Rust-free
8. Intelligent control system:
Pressure+flow dual control
9. Multiple protection: Water shortage protection, frequent start& stop protection, over current & under voltage protection, etc.
10. Timing function, supply water to water tank regularly.

