

# 507

**Product Technical Specifications** 

# **ECBT-PTA4**





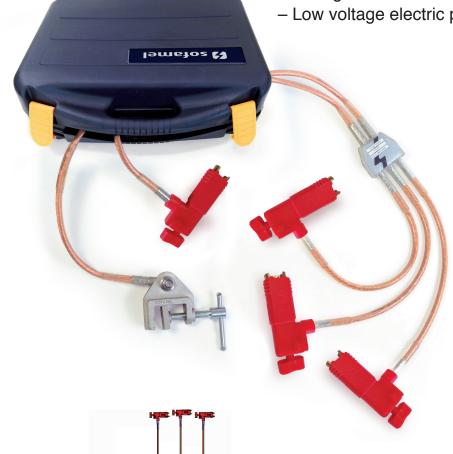



# **Functionality**

Earthing and short-circuit kit for low-voltage distribution boards. The main reason for their installation is to protect the worker from accidental power-on or return of voltage during repair work.




# **ECBT-PTA4**

# Earthing and short-circuit equipment – Low voltage electric panels

### **Product Features**

The isolated PTA clamps are used to ground the electrical panels. These clamps can cover an opening distance of between 8 and 22 mm, hexagonal and cylindrical sections.





## Composed of

- 4 insulated PTA earth clamps and the neutral.
- 3 copper PVC-insulated cables 25 mm² section and 1,2 m long for short circuit of phases.
- 1 copper cables 25 mm<sup>2</sup> section and 1,5 m long for the neutral's earthing.
- 1 PVC-insulated cable 25 mm² section and 2 m long for earthing.
- 1 branch-joint connector (5 cables).
- 1 TT-38A earthing lathe.
- 1 plastic case for storage and transport.

### Certified

According to the Standard IEC 61230.





Datos sujetos a cambios 2017, Mayo 2

© 2017 Sofamel SLU Todos los derechos reservados.

Versión: R2-7.2 COM01

Las especificaciones están sujetas a cambios sin previo aviso.

