

Earthing & Short Circuit Protection Equipment

Safety


Unipolar Earthing Equipment

SAFETY CATALOGUE

666 PATF-PDC

Integrated earthing equipment for railway system catenaries, double catenaries and rigid catenary. With one PDC clamp to enable earthing of lines for repair work.

According to IEC 61230 standard.




Example lockdown with key.


Optional
Catenary pole with handle to be used next to the rail.
(cod. T-615019)



PDC
Medium voltage clamp

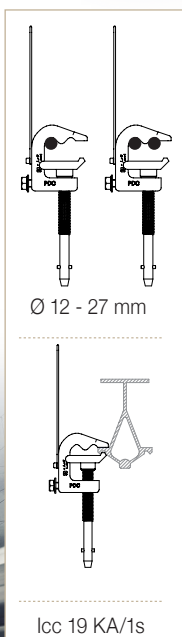


TTR
Earth lathe



Icc 19 KA/1s



TTSR
Earth lathe



Icc 19 KA/1s

Composed of:

- 1 PDC aluminium alloy clamps with screw tighten and bayonet for cylindrical conductors with diameter between 12 and 27 mm.
- 1 copper cables with PVC insulation of 50 mm² section and 7 m of length.
- 1 TTSR or TTR milling earthing lathe.
- 1 nylon bags to store and transport the equipment.

Code	Ref.	Short circuit current ICC Max.
666140	PATF-PDC-TTR	12 KA/1s
666150	PATF-PDC-TTSR	