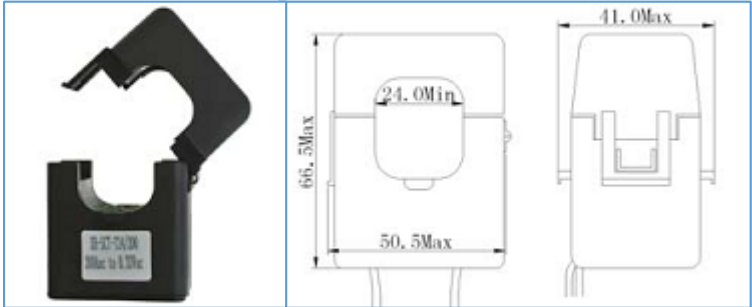
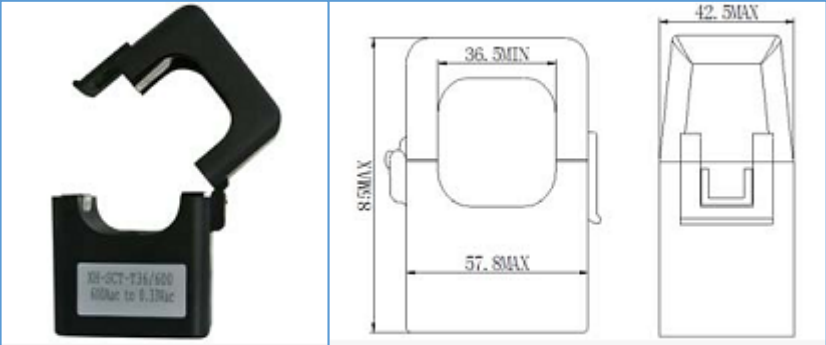


SPLIT CORE CT – Clip On Type	Model	Primary / Secondary	Accuracy Class
	SP-SCT-T24-100/5 SP-SCT-T24-100/1	100/5 100/1	Class 1 & 0.5 Class 1 & 0.5
	SP-SCT-T24-150/5 SP-SCT-T24-150/1	150/5 150/1	Class 1 & 0.5 Class 1 & 0.5
	SP-SCT-T24-200/5 SP-SCT-T24-200/1	200/5 200/1	Class 1 & 0.5 Class 1 & 0.5
	SP-SCT-T24-250/5 SP-SCT-T24-250/1	250/5 250/1	Class 1 & 0.5 Class 1 & 0.5
	SP-SCT-T36-300/5 SP-SCT-T36-300/1	300/5 300/1	Class 1 & 0.5 Class 1 & 0.5
	SP-SCT-T36-400/5 SP-SCT-T36-400/1	400/5 400/1	Class 1 & 0.5 Class 1 & 0.5
	SP-SCT-T36-500/5 SP-SCT-T36-500/1	500/5 500/1	Class 1 & 0.5 Class 1 & 0.5
	SP-SCT-T36-600/5 SP-SCT-T36-600/1	600/5 600/1	Class 1 & 0.5 Class 1 & 0.5

Specifications

- Rated Current: 5A to 3000A
- Secondary Output: 5A or 1A
- Accuracy: 0.5% ~ 1% from 10% to 150% of full scale range
- Dielectric Strength; 4000V
- Certification: IEC 60044-1, CE, UL & RoHS

Application

- Energy metering & sub-metering
- Energy Management Systems
- Control & monitoring devices
- Energy saving devices