

IE3 PREMIUM EFFICIENCY MOTORS

- ✓ Save energy
- ✓ Protect environment
- ✓ Enhance Profits



IEC MOTORS

Considerations for selection and usage of IE3 motors

Motor Size

The load factor should be chosen between 65% to 100% so that the advantage of saving will be achieved. The efficiency under such condition standard motor efficiency under such condition standard motor efficiency curve will be in drooping nature, but energy efficient motors have flat efficiency curve, Hence, fall in efficiency is marginal. Thus energy saving is significant even in partial loads

Special Application

The benefits using these motors are maximum in continuous duty applications like blowers, compressors, fans, exhausters & pumps etc.

Operating Speed

Saving :

Savings concluded as follows:

kW = Output of motor

E1 = Efficiency of standard motors

E2 = Efficiency of IE3 motors.

Method of testing efficiency

The efficiency method used to evaluate the efficiency of IE3 motors is more stringent than the method used in case of standard motors.


Operating Speed

IE3 motors have less slip compared to standard motors. Hence, their operating speed is more.

VFD application

When IE3 motors are used for variable loads the use of VFD results in effective energy saving. Further, the higher inrush current is not encountered by the motor because the VFD modifies the starting current of the motor. It applies low voltage, low frequency supply at the time of starting.

% Efficiency

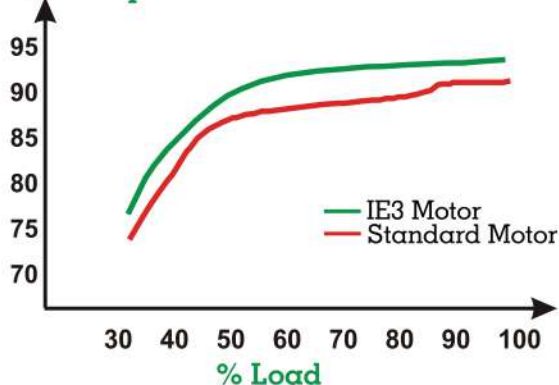

$$X = \frac{kW}{E1} - \frac{kW}{E2}$$

Savings = (X x Working hrs x working days x Tariff)

So it makes a great deal of sense to choose LHPL IE3 level motors whenever a motor is needed to drive any application.

IE3 MOTORS

Motor Size

Established in 1981, LHP is a reputed manufacturer of a wide range of high-quality motors up to 355 L frame (315 kW). The range includes various types of motors such as Standard Induction, Flame-proof, Geared, Brake, Dual Speed, Non Sparking, Crane & Hoist Duty and Special Purpose Motors to name only a few. The range has been proving its worth for different applications in various industries. LHP motors are the preferred choice of major corporates, MNCs & OEMs due to the product quality, performance, timely deliveries and competitive prices.

LHP IE3 motors conform to IEC 60034-30:2008 and IS : 12615-2011

- ✓ Suitable for continuous process industries where high energy saving is essential
- ✓ Short payback period for replacement
- ✓ Enhanced motor life
- ✓ Less maintenance

Applications

Machine tools, Textile, Air conditioning, Dairy equipment, Packing machinery, Material handling equipment, Geared Motors, Wood seasoning plants, Solvent extraction plants, Edible oil factories, Cement plants, Paper plants, Sugar plants Steel plants, Petroleum, Pharma and Chemical Industries.

Method of testing efficiency

Range	Up to 315 kW
RPM	3000, 1500, 1000 (synchronous) at 50Hz
Mounting	Foot (B-3), Flange (B5), Face (B-14) and combinations
Frame	71 to 355L
Protection	IP : 55
Insulation	F class
Voltage	415V, 380V or as per requirement
Frequency	50 Hz / 60 Hz or as per requirement

Method of testing efficiency

IS : 325 (IEC 34-1)	Specifications for 3 phase induction motors
IS : 12615 (IEC 34-30)	Specifications for Energy Efficiency Induction Motors
IS : 4722 (BS 4999)	Specifications for Energy Efficiency Induction Motors
IS/IEC 60034-5	Degree of protection provided by enclosure for rotating electrical machines
IS : 4889 (IEC 34-2)	Method of determination of efficiency of rotating electric



The values of efficiency for motors to classify as IE3 in accordance with the new IEC 60034-30-2008/IS:12615-2011 are as under

kW	2 Pole		4 Pole		6 Pole	
	Frame size	Efficiency %	Frame size	Efficiency %	Frame size	Efficiency %
0.37	71	75.5	71	73	80	71.9
0.55	71	78.1	80	78	80	75.9
0.75	80	80.7	80	82.5	90S	78.9
1.1	80	82.7	90S	84.1	90L	81.0
1.5	90S	84.2	90L	85.3	100L	82.5
2.2	90L	85.9	100L	86.7	112M	84.3
3	100L	87.1	112M	87.7	132S	85.6
3.7	100L	87.8	112M	88.4	132S	86.5
4	112M	88.1	132S	88.6	132M	86.8
5.5	132S	89.2	132S	89.6	132M	88.0
7.5	132S	90.1	132M	90.4	160M	89.1
11	160M	91.2	160M	91.4	160L	90.3
15	160M	91.9	160L	92.1	180L	91.2
18.5	160L	92.4	180M	92.6	200L	91.7
22	180M	92.7	180L	93.	200L	92.2
30	200L	93.3	200L	93.6	225M	92.9
37	200L	93.7	225S	93.9	250M	93.3
45	225M	94.0	225M	94.2	280S	93.7
55	250M	94.3	250M	94.6	280M	94.1
75	280S	94.7	280S	95	315S	94.6
90	280M	95.0	280M	95.2	*315M	94.9
110	315S	95.2	315S	95.4	*315M	95.1
132	*315M	95.4	*315M	95.6	*315L	95.4
160	*315L	95.6	*315L	95.8	355L	95.6
200	315L	95.8	315L	96	355L	95.8
250	355S	95.8	355S	96	355L	95.8
315	355S	95.8	355L	96	400M	95.8

- Notes : 1. IS : 1231 defines frame size to output correlation only up to Frame size 315M
2. (*) These frames are indicated as "preferred" in IS:12615-2011



SATURN PYRO SDN. BHD.

Johor Bahru Office :

No. 44 & 44A, Jalan Palma Rafis 1,
Taman Dato Chellam, 81800 Ulu Tiram
Johor.
Tel : +607 - 866 0510
Fax : +607 - 866 0511
enquiry@saturnpyro.com

Shah Alam Office :

K3-03-12, Tower 3, UOA Business Park,
Jalan Pengaturcara U1/51A, Section U1,
40150 Shah Alam, Selangor
Tel : +603 - 587 03282
E-mail : kl@saturnpyro.com

Singapore Office :

Saturn Pyro Pte. Ltd.
Address : 101 Kitchener Road, #02-42
Jalan Besar Plaza, Singapore 208511
Tel : +607 - 866 0510
Fax : +607 - 866 0511
E-mail : jerry@saturnpyro.com