

CPK-CAN



CPK-CAN

PRODUCT SPECIFICATION

CPK-CAN

Materials ABS

Ambient operating temperature -25°C to +50°C

Volume Max.85dB at 1m

Protection rating IP65

Compliant with RoHS directive

- Panel type signal phone that outputs clear and cheerful 8-48Khz MP3 Audio harmony by applying industrial CAN communication
- Up to 255ea of frame IDs can be set by software manager
- Can select and play 255 songs using CAN communication
- Save MP3 sound source using USB C-TYPE cable
- Supports 128Mbyte storage capacity (File format: FAT)
- Support CAN communication standard format 2.0A, Extended format 2.0B
- Supports 4 communication speeds: 125Kbps, 250Kbps, 500Kbps, 1Mbps



Terminal box for Signal phone for CAN communication panel (back side)

CPK-CAN Signal phone for CAN communication panel, Max.85dB


Model number	Sound type	Volume	Voltage/Current	Certificates	Weight
CPK-CAN	MP3 File (255 Sounds)	Max.85dB	DC12-24V/0.600A	CE	0.21kg

※ DC type model has a free-voltage range of 10V-36V

※ When playing MP3 files, there may be difference of volume depending on user's audio file type.

Technical Diagram


Units: mm

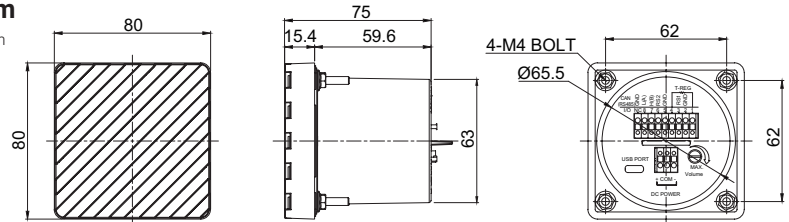

Ordering Specification

CPK-CAN	-	12/24
[Model number]		[Voltage]
CPK-CAN		12/24-DC12V-24V

Wiring Instructions

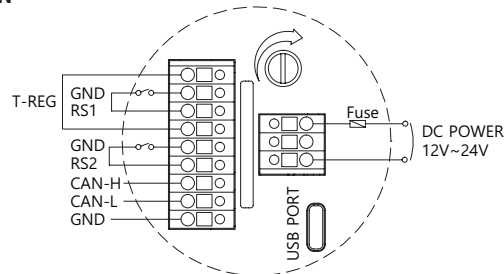

Ordering Specification

CPK-CAN	-	12/24	-	2.0A
[Model number]		[Voltage]		[CAN]
CPK-CAN		12/24-DC12V-24V		2.0A-CAN 2.0A(standard format) 2.0B-CAN 2.0B(Extended format)