

CPK-RS485



CPK-RS485

PRODUCT SPECIFICATION

CPK-RS485

Materials ABS

Ambient operating temperature -25°C to +50°C

Volume Max.85dB at 1m

Protection rating IP65

Compliant with RoHS directive

- Panel type signal phone that outputs clear and cheerful 8-48Khz MP3 Audio harmony by applying industrial RS485 communication
- Up to 255ea of frame IDs can be set by software manager
- Can select and play 255 songs using RS485 communication
- Save MP3 sound source using USB C-TYPE cable
- Supports 128Mbyte storage capacity (File format: FAT)
- Supports 4 communication speeds: 9600bps, 19200bps, 38400bps, 115200bps

CPK-RS485 Signal phone for RS485 communication panel

Model number	Sound type	Volume	Voltage	Current	Certificates	Weight
CPK-RS485	MP3 File (255 Sounds)	Max.85dB	DC12V-24V	Max.0.600A	CE	0.21kg

※ DC type model has a free-voltage range of 10V-36V

※ When playing MP3 files, there may be difference of volume depending on user's audio file type.




Terminal box for Signal phone for RS485 communication panel(back side)

Technical Diagram


·CPK-RS485

Units: mm

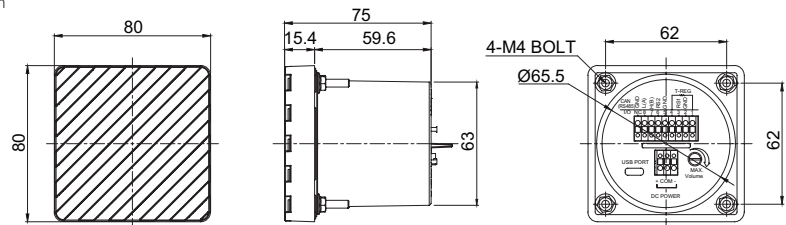

Wiring Instructions

·CPK-RS485

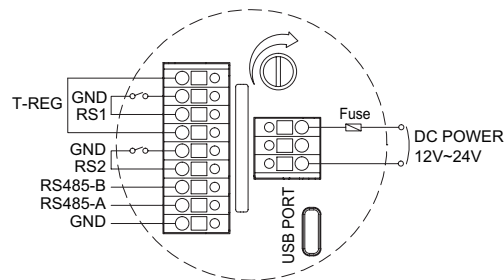

Ordering Specification

CPK-RS485	-	12/24
[Model number]		[Voltage]
CPK-RS485		12/24-DC12V-24V