

Q70NSN



PRODUCT SPECIFICATION

Q70NSN

Materials Lens-AS, Housing-ABS
Ambient operating temperature -40°C to +50°C
Protection rating IP66
Flashing rate 60-80 flashes/min

- Ø70mm xenon lamp strobe signal lights
- High efficiency strobe light that offers excellent outdoor visibility and long-distance signal light luminance close to natural light
- Lamp connector fastening structure allows for convenient lamp replacement
- Bottom nut base allows for convenient mounting



Q70NSN

Q70NSN Xenon Lamp Strobe Signal Lights


Model number	Voltage	Current	Certificates	Weight	Color
Q70NSN	DC12V-80V	Max. 0.262A	-	0.188kg	● R-Red
	AC110V	0.050A		0.191kg	● A-Amber ● G-Green ● B-Blue

※ DC type model has a free-voltage range of 10V-30V

Technical Diagram

Units: mm

·Q70NSN

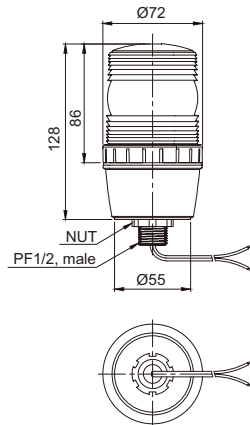

Wiring Instructions

- External power line - UL1015 AWG18(0.75sq) x 2C 400mm
- This product can be wired regardless of polarity.

Ordering Specification

Q70NSN	-	12/80	-	R
[Model number]		[Voltage]		[Color]
Q70NSN		12/80-DC12V-80V 110-AC110V		● R-Red ● A-Amber ● G-Green ● B-Blue