

# CPK-10



## PRODUCT SPECIFICATION

CPK-10

**Materials** ABS  
**Ambient operating temperature** -25°C to +50°C  
**Volume** Max.85dB at 1m  
**Protection rating** IP65  
**Compliant with RoHS directive**

- Panel type signal phone that outputs clear and cheerful 8-48Khz MP3 Audio chords using IO input
- Compatible with NPN and PNP depending on the connection method by using the terminal block for connection on the back of the product
- Plays 255ea of MP3 files with binary input method
- Save MP3 sound source using USB C-TYPE cable



CPK-10

### CPK-10 Signal phone for multi-channel panel

Model number	Sound Pattern	Volume	Voltage/Current	Certificates	Weight
CPK-10	MP3 File (255 Sounds)	Max.85dB	DC12-24V/0.500A	CE	0.21kg

※ DC type model has a free-voltage range of 10V-36V


※ When playing MP3 files, there may be difference of volume depending on user's audio file type.



Terminal box for Signal phone panel(back side)


### Technical Diagram

Units: mm

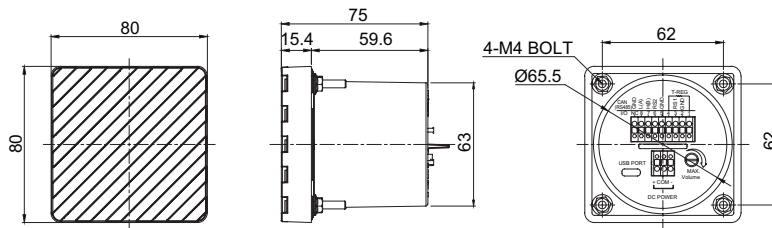


### Wiring Instructions

#### -CPK-10 "-"External Contact

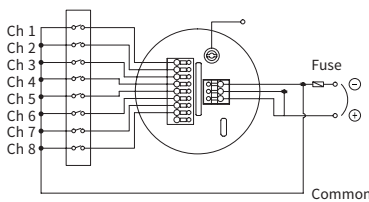


#### -CPK-10 "+"External Contact

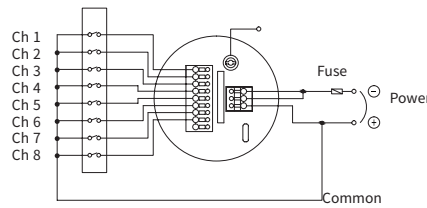


#### -External Transistor

NPN-TRANSISTOR

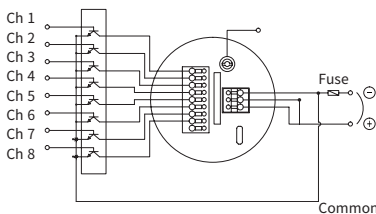

PNP-TRANSISTOR

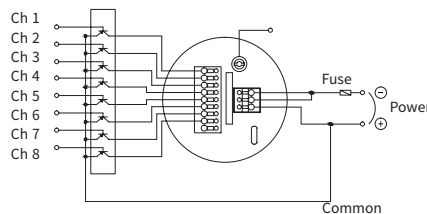

### Ordering Specification

