

# Wall Mounted High Buzzer Horn

## S60ADH



### PRODUCT SPECIFICATION

S60ADH

**Materials** ABS  
**Ambient operating temperature** -25°C to +50°C  
**Sound volume** Max.95dB at 1m  
**Protection rating** IP54  
**Compliant with RoHS directive**

- Elegant wall mounted buzzer horn
- Horn resonance structure gives the product low power consumption and high sound tone
- Cone sound diffusion structure provides wide & excellent signal sound transmission effect



S60ADH

### S60ADH Max.95dB, Wall Mounted Buzzer Horn


Model number	Pre-recorded Sound	Voltage	Current	Certificates	Weight
S60ADH	·Buzzer Volume : Max. 95dB	DC12V	0.083A	CE	0.12kg
		DC24V	0.042A		0.12kg
		AC110V	0.016A		0.12kg
		AC220V	0.008A		0.12kg

Pre-recorded Sound	Sound Pattern	Ch	Volume
1 Buzzer tone	Dududu(Consecutive)	Ch1	Max.95dB

### Technical Diagram

Units: mm

·S60ADH

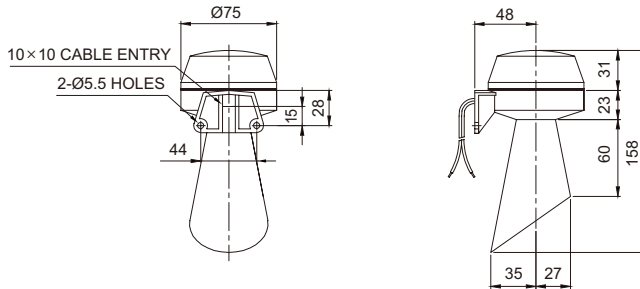

### Customization

· 105dB strong buzzer type(Model number: S60ADH-HBZ)

### Ordering Specification

S60ADH	-	220
[Model number]		[Voltage]
S60ADH		12-DC12V 24-DC24V 110-AC110V 220-AC220V