

# QLS-SLM-250



QLS-SLM-250

## PRODUCT SPECIFICATION

QLS-SLM-250

**Materials** Side cover-PC Lens-PC, Bracket-Al  
**Ambient operating temperature**  $-40^{\circ}\text{C} \leq T_{\text{amb}} \leq +60^{\circ}\text{C}$   
**Protection rating** Non Water-Proof  
**Certificates** CE, UL

- Control cabinet, machinery inside light and work light purpose
- Slim and compact structure realize aesthetically pleasing design
- Long product lifetime with the application of a high intensity LED light source
- 360 degree rotational mounting bracket realizes light emit angle can be adjusted
- Excellent visibility by a structure with direct distributes LED light to user direction
- No external ground wire is necessary as it is inside of the unit already


### QLS-SLM-250 LED Work Lights

		Optics Specifications
Model		QLS-SLM-250
Directions		Translucent
Light color		Cooldaylight
Color temperature		6,000-7,000K
Luminous flux	DC	650lm
Efficacy(lm/W)	DC	310Lux
		Specifications
Voltage		DC24V
Range for operation voltage		DC21.6V-26.4V
Current		0.37A
Power consumption		8.5W
Insulation resistance		Min. 100MΩ(500V DC mega ohm meter)
Withstanding voltage		DC: 500VAC, 60Hz, 1 minute
Protection rating		Non-Waterproof
Materials		Side cover-PC, Lens-PC, Bracket-Al
Certifications		CE UL
Weight(Approx.)		0.20Kg

### Technical Diagram

Units: mm

·QLS-SLM-250

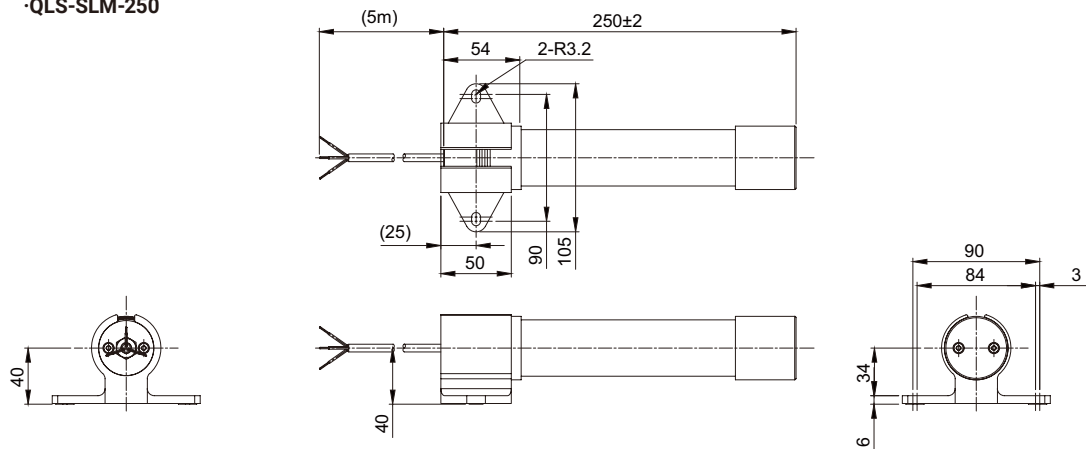

### Ordering Specification

QLS-SLM	-	250	-	24
[Model number]		[Product length]		[Voltage]
QLS-SLM		250-250mm		24-DC24V