


ET50MCL



PRODUCT SPECIFICATION

ET50MCL

Materials Housing-PA, Lens-PC

Ambient operating temperature -25°C to +55°C

Volume Max. 85dB at 1m

Protection rating IP20

- Economical product that can transmit 3-color signals with one layer
- It is a compact pole-mounted product that adopts high-brightness LED as a light source and can be used in various places.
- The milky translucent lens emits soft signal light and reduces the blind area for excellent visibility
- Equipped with a foldable bracket to respond to various external environments
- Buzzer type selectable



ET50MCL



ET50MCL Industrial LED beacon

| Model number | Voltage | Current | Certificates | Weight | Color |
|---|---------|---------|--------------|--------|------------------------|
| ET50MCL Steady | DC24V | 0.053A | - | 0.14kg | ● R-Red |
| ET50MCL-BZ Steady w/built-in buzzer | | | | | ● A-Amber ● G-Green |

Wiring Instructions

- ET50MCL series can be wired by using both external contact and transistor.
- Wiring to transistor, use the PNP transistor. Please wire properly based on wiring instructions.


- ET50MCL
- ET50MCL-BZ

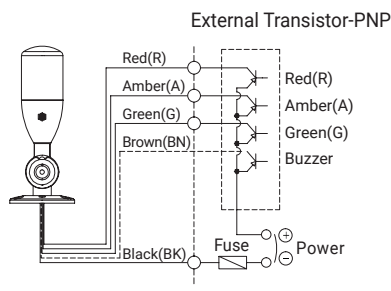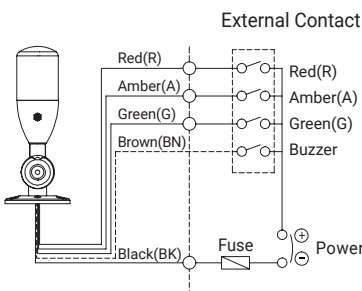

Technical Diagram

Units: mm

- ET50MCL
- ET50MCL-BZ

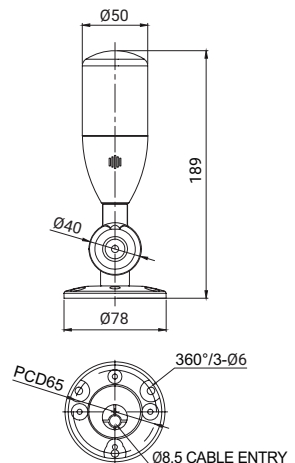

Ordering Specification

| | | | | |
|---|---|-----------------------|---|--|
| ET50MCL | - | 24 | - | RAG |
| [Model number] ET50MCL ET50MCL-BZ | | [Voltage] 24-DC24V | | [Color] ● R-Red ● A-Amber ● G-Green |

Customization

- NPN type