


ET64MCL



ET64MCL

PRODUCT SPECIFICATION

ET64MCL

Materials Housing-ABS, Lens-PC
Ambient operating temperature -25°C to +55°C
Volume Max. 85dB at 1m
Protection rating IP20

- Economical product that can transmit 3-color signals with one layer
- A soft and cozy signal light is emitted through the milky translucent lens.
- Equipped with a foldable bracket to respond to various external environments
- Buzzer type can be selected for lighting or blinking specifications



ET64MCL Industrial LED beacon

Model number	Voltage	Current	Certificates	Weight	Color
ET64MCL Steady	DC24V	0.067A	-	0.23kg	<ul style="list-style-type: none"> ● R-Red ● A-Amber ● G-Green
ET64MCL-BZ Steady w/built-in buzzer					
ET64MCLF Flashing					
ET64MCLF-BZ Flashing w/built-in buzzer					

Technical Diagram

Units: mm



- ET64MCL
- ET64MCL-BZ

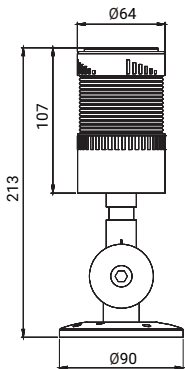

Wiring Instructions

- ET64MCL series can be wired by using both external contact and transistor.
- Wiring to transistor, use the PNP transistor. Please wire properly based on wiring instructions.

- ET64MCL / ET64MCL-BZ
- ET64MCLF / ET64MCLF-BZ

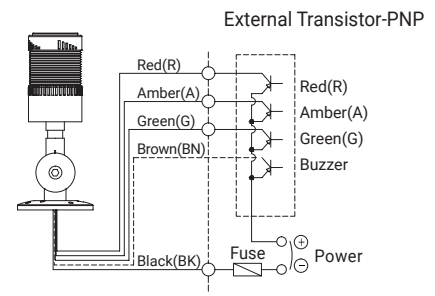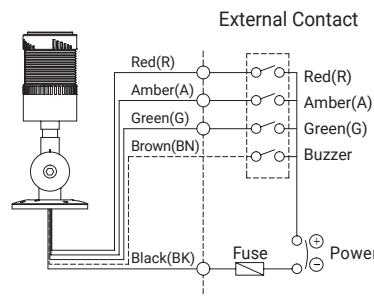

※ ET64MCL / ET64MCL-BZ: Steady, ET64MCLF / ET64MCLF-BZ: Flashing

Ordering Specification

ET64MCL	-	24	-	RAG
[Model number]		[Voltage]		[Color]
ET64MCL ET64MCL-BZ ET64MCLF ET64MCLF-BZ		24-DC24V		<ul style="list-style-type: none"> ● R-Red ● A-Amber ● G-Green