


ETA50MCL



ETA50MCL

PRODUCT SPECIFICATION

ETA50MCL

Materials Housing-Al, Lens-PC
Ambient operating temperature -25°C to +55°C
Volume Max. 85dB at 1m
Protection rating IP20

- Pole-mounted economical product adopting high-brightness LED as a light source
- It is easy to identify signal light by expressing red, amber, and green in one stage
- High visibility from a distance by using a transparent glove
- Excellent durability by using aluminum housing
- Equipped with a foldable bracket to respond to various external environments
- Buzzer type can be selected for lighting or blinking specifications


ETA50MCL Industrial LED beacon

Model number	Voltage	Current	Certificates	Weight	Color
ETA50MCL Steady					
ETA50MCL-BZ Steady w/built-in buzzer	DC24V	0.085A	-	0.55kg	● R-Red ● A-Amber ● G-Green
ETA50MCLF Flashing					
ETA50MCLF-BZ Flashing w/built-in buzzer					

Technical Diagram

Units: mm


- ETA50MCL / ETA50MCL-BZ
- ETA50MCLF / ETA50MCLF-BZ

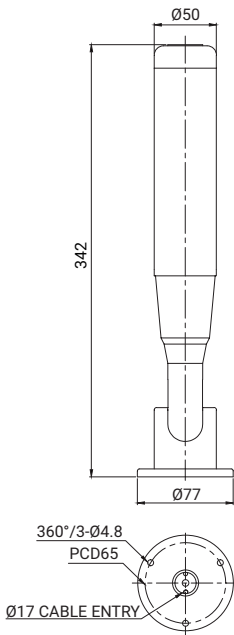

Wiring Instructions

- ETA50MCL series can be wired by using both external contact and transistor.
- Wiring to transistor, use the PNP transistor. Please wire properly based on wiring instructions.

- ETA50MCL / ETA50MCL-BZ
- ETA50MCLF / ETA50MCLF-BZ

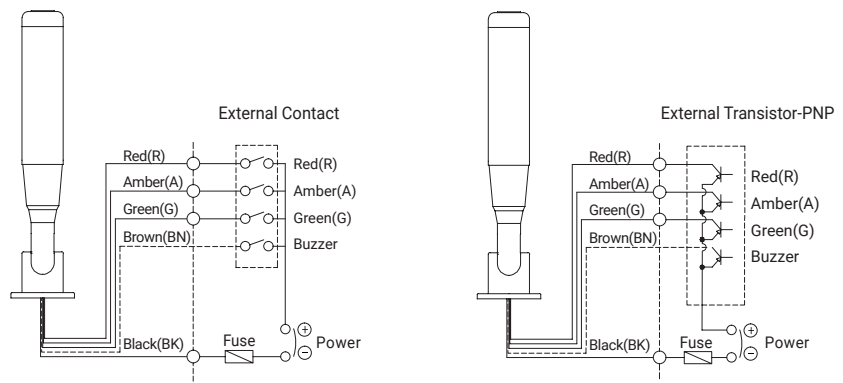

※ ETA50MCL / ETA50MCL-BZ: Steady, ETA50MCLF / ETA50MCLF-BZ: Flashing

Ordering Specification

ETA50MCL	-	24	-	RAG
[Model number]		[Voltage]		[Color]
ETA50MCL ETA50MCL-BZ ETA50MCLF ETA50MCLF-BZ		24-DC24V		● R-Red ● A-Amber ● G-Green

Customization

- NPN type