


# EMCL50T



EMCL50T

### Bracket

- It can be installed on the wall by adopting wall mounting type bracket.



## PRODUCT SPECIFICATION

EMCL50T

**Materials** Housing-Al, Lens-PC  
**Ambient operating temperature** -25°C to +55°C  
**Volume** Max. 85dB at 1m  
**Protection rating** IP69K


- Small indicator light capable of transmitting three signal colors with one indicator light
- By applying a milky translucent lens, the unique color of the LED is emitted subtly when turned on
- Waterproof and dustproof model with fully sealed structure with IP69K degree of protection to cope with harsh environmental conditions
- Additional function model selectable (T: touch function)
- Buzzer specifications can be selected for signal wire withdrawal type or M12 connector mounting type

### EMCL50T Industrial LED beacon

Model number	Voltage	Current	Certificates	Weight	Color
EMCL50T Steady	DC12 ~ 30V	0.040A	CE	0.21kg	<ul style="list-style-type: none"> <li><span style="color: red;">●</span> R-Red</li> <li><span style="color: yellow;">●</span> A-Amber</li> <li><span style="color: green;">●</span> G-Green</li> </ul>

### Technical Diagram • EMCL50T

Units: mm

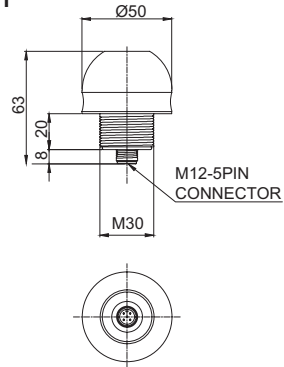

### Customization

- M12 Five- Core Cable/1.5m
- NPN typea

### M12 connector equipped

5PIN CONNECTOR		Color		
No.	Before contact	After contact	Wiring	
2	NONE	RED	Pin 1+Pin 4((-)Common)	
1	GREEN	AMBER	Pin 1+Pin 3 +Pin 4((-)Common)	

### Ordering Specification

EMCL50T	-	12/24	-	RAG
[Model number] EMCL50T		[Voltage] 12/24-DC12~30V		[Color] <ul style="list-style-type: none"> <li><span style="color: red;">●</span> R-Red</li> <li><span style="color: yellow;">●</span> A-Amber</li> <li><span style="color: green;">●</span> G-Green</li> </ul>