



Visionary-S

3D SNAPSHOT – COLORFUL PERSPECTIVES FOR PRECISE FACTORY AUTOMATION



3D machine vision


SICK
Sensor Intelligence.

3D SNAPSHOT – COLORFUL PERSPECTIVES FOR PRECISE FACTORY AUTOMATION

Stream

Program

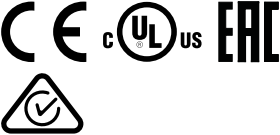

Additional information

Detailed technical data3

Ordering information4

Dimensional drawings5

Accessories.....6

Product description

Thanks to the innovative 3D snapshot technology, Visionary-S 3D vision sensors from SICK offer maximum flexibility for countless applications in factory automation. Based on the stereo vision principle, with the Visionary-S, SICK is offering solutions for the highest demands on accuracy and speed, even for stationary applications. The Visionary-S combines structured illumination with

the proven technology of a color camera and delivers colorful depth images in real time. Powerful visualization tools, broad support of common programming languages and reliable 2D and 3D information make the Visionary-S the ideal solution for robotics, intralogistics and various quality assurance tasks in production, to name a few examples.

At a glance

- Up to 30 color depth images per second
- Works in absolute darkness and in daylight of up to 40 klx
- Resolution: 640 px x 512 px; depth resolution down to the sub-millimeter
- Output of 3D color data via a Gigabit Ethernet interface
- Temperature range: 0 °C ... 50 °C (depending on the housing), enclosure rating: IP67
- HDR mode

Your benefits

- Rugged cameras with a working range of 0.50 m to 6.50 m for industrial use
- More than 320,000 depth and color intensity values in a single recording
- High recording speed with very high resolution at the same time
- Flexibility: The camera can be integrated with the help of common programming languages
- High-efficiency illumination: Reliable depth data even with ambient light
- Visionary-S CX offers direct output of color and depth values via Ethernet
- Visionary-S AP is based on SICK AppSpace, which allows customers to create their own applications and load them onto the camera or use application-specific Key Apps

→ www.sick.com/Visionary-S

For more information, simply enter the link or scan the QR code and get direct access to technical data, CAD design models, operating instructions, software, application examples, and much more.



Detailed technical data

Features

Task	Measuring, 3D, robot guidance, positioning, color inspection, navigation
Technology	3D snapshot, image analysis, color
Product category	Configurable, programmable, streaming, pre-calibrated
Working distance	0.5 m ... 6.5 m 0.5 m ... 65 m ¹⁾
Detection angle	60° x 50°
Angular resolution	0.094° x 0.098°
Light source	Internal lighting Laser, invisible, infrared, 808 nm
Laser class	1 (EN/IEC 60825-1:2014; EN/IEC 60825-1:2007) ²⁾
Factory calibrated	✓

¹⁾ Only via API

²⁾ Complies with 21 CFR 1040.10 except for conformances according to Laser Notice no. 50 from June 24, 2007 and the following versions.

Performance

	Visionary-S CX	Visionary-S AP
Pixel count	640 px x 512 px	
Processor	-	1.2 GHz, 4 × ARM Cortex A72 ¹⁾
Scan/frame rate	30 fps, Up to 9,850,000 3D data points/s ²⁾	
Repeatability	≤ 0.25 mm, at 0.5 m scanning range ≤ 4 mm, at 2.5 m scanning range	
On delay	< 20 s (typical)	
Response time	< 66 ms	
Integrated application	2D and 3D data flow with the option of filtering data in the device	Possibility to process data within the device. Already-finished Key Apps can be loaded onto the device and independent applications can be created.

¹⁾ Part of the CPU is used for internal processing. The current CPU usage is displayed in the AppStudio CPU monitor.

²⁾ 0.03 s per 3D image.

Interfaces

	Visionary-S CX	Visionary-S AP
Ethernet	✓	
Function	Complete data stream combining distance and RGB values in one snapshot plus device control	Data is application-specific or can be defined in independently-developed applications.
Data transmission rate	700 Mbit/s, communication interface Gigabit Ethernet (TCP/IP)	Communication interface Gigabit Ethernet (TCP/IP)
Configuration software	SOPAS ET, Telegram interface	SICK AppManager, SICK AppStudio, Web-Interface, Telegram interface
Digital input	2	
Digital output	4	
Optical indicators	2 status LEDs	

Mechanics/electronics

Connection type	M12 8-pin Gigabit Ethernet, X-coded M12 17-pin (voltage supply/data), system plug, digital IOs (24 V)
Supply voltage	24 V DC, ± 15 %
Power consumption	19 W, Typical (without digital I/Os)
Peak current	3 A
Enclosure rating	IP67
Protection class	III
Housing color	Blue, black
Weight	2.2 kg, with cooling fins 1.7 kg, without cooling fins (depending on type)
Dimensions (L x W x H)	162 mm x 116 mm x 104 mm, with cooling fins 162 mm x 93 mm x 78 mm, without cooling fins (depending on type)
Mounting	Any


Ambient data

Electromagnetic compatibility (EMC)	EN 61000-6-2:2005-08, EN 61000-6-3:2007-01
Shock load	EN 60068-2-27:2009
Vibration load	EN 60068-2-6, EN 60068-2-64
Ambient operating temperature	0 °C ... +50 °C, with cooling fins 0 °C ... +40 °C, without cooling fins (depending on type)
Storage temperature	-20 °C ... +70 °C
Ambient light immunity	< 40 klx, Sunlight

Ordering information

Sub product family	Integrated application	Dimensions (L x W x H)	Temperature	Type	Part number
Visionary-S CX	2D and 3D data stream with the option of filtering data in the device	162 mm x 116 mm x 104 mm	0 °C ... +50 °C	V3S102-1AAAAAA	1090184
		162 mm x 93 mm x 78 mm	0 °C ... +40 °C	V3S102-1AABAAB	1090185
Visionary-S AP	Possibility to process data within the device. Already-finished Key Apps can be loaded onto the device and independent applications can be created.	162 mm x 116 mm x 104 mm	0 °C ... +50 °C	V3S142-1AAAAAA	1114319
		162 mm x 93 mm x 78 mm	0 °C ... +40 °C	V3S142-1AABAAB	1114320

Application examples

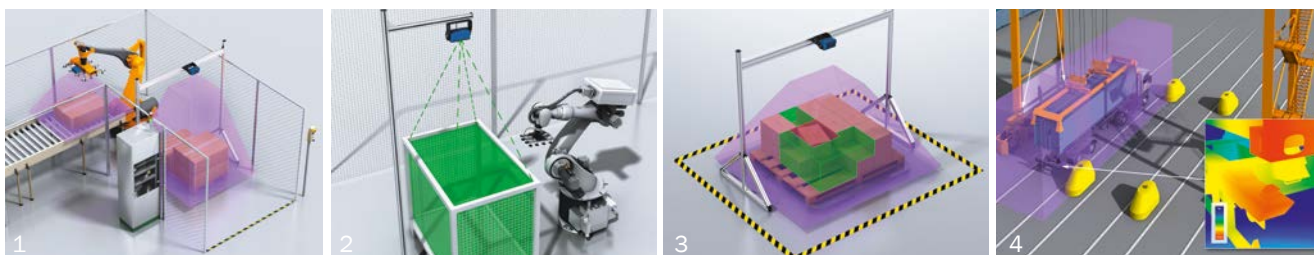

Picture 1: Dimensioning of goods. Goods can be measured with a 3D snapshot image


Picture 2: Bin-Picking: 3D camera provides data for robot guidance

Picture 3: Palletizing and depalletizing


Picture 4: Container positioning

Dimensional drawings (Dimensions in mm (inch))


Without cooling fins

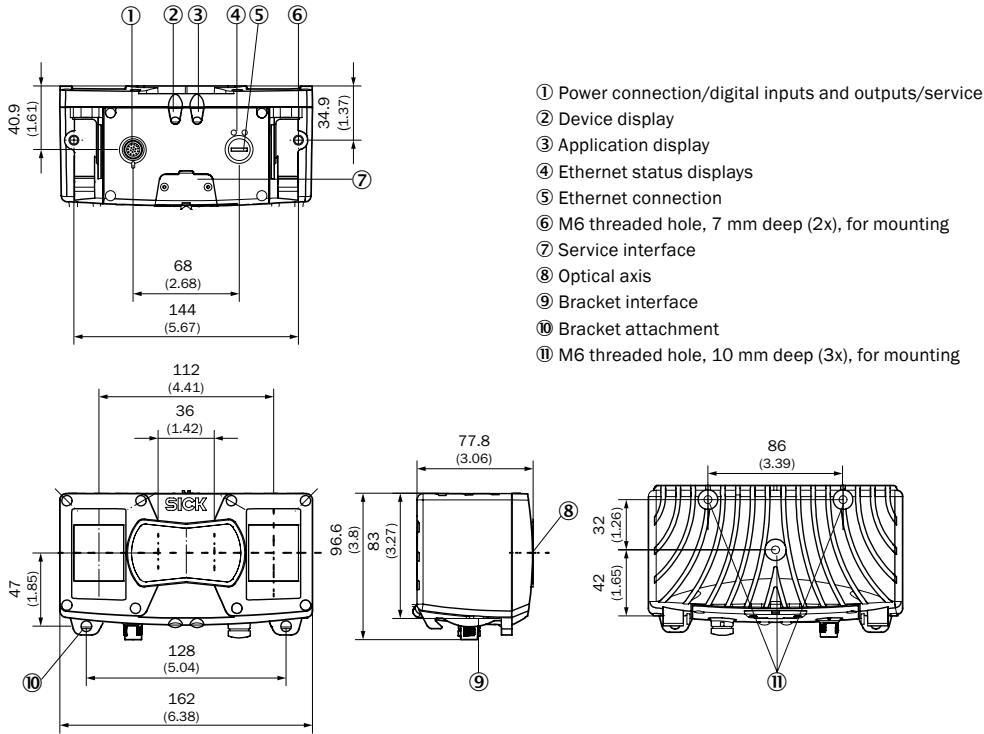

With cooling fins

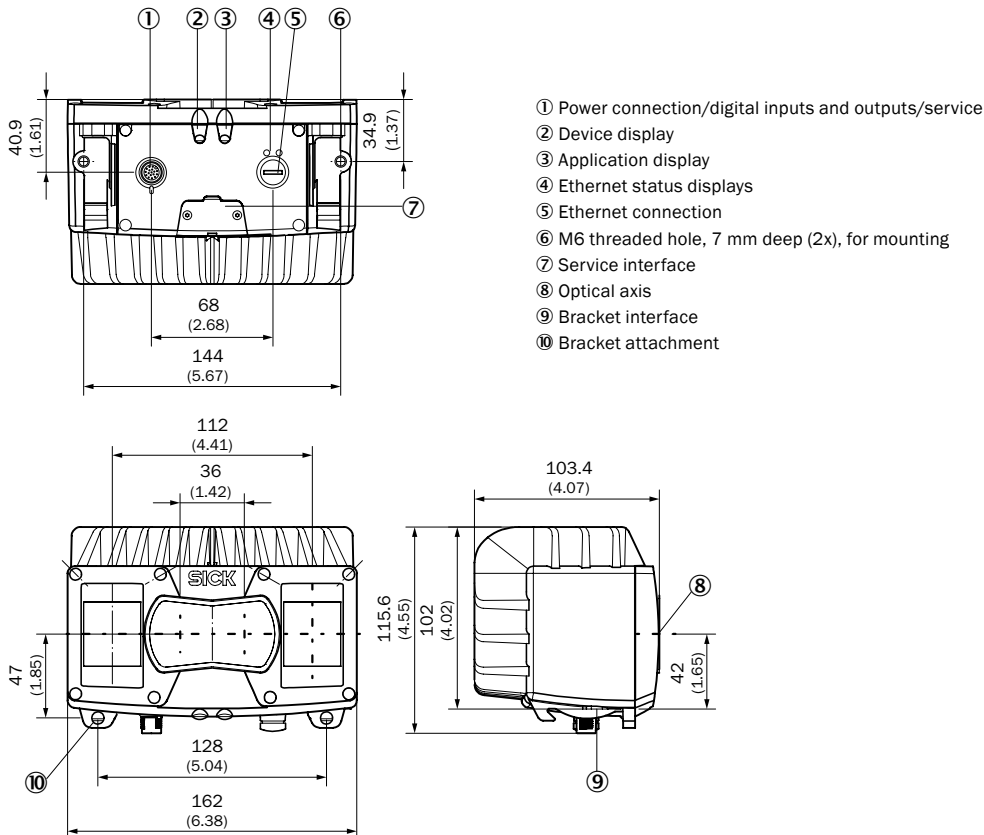

Detection zone and field of view ($\Delta x \times \Delta y$)

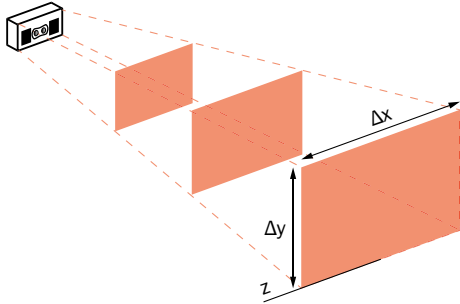

Working distance absolute (z)	Measuring range ($\Delta x \times \Delta y$)	Pixel size	Measurement accuracy Δz (average value)	Repeatability σz (average value)
0.50 m	~ 45 cm x 45 cm	~ 1 mm x 1 mm	< 1.5 mm	± 0.25 mm
1.00 m	~ 100 cm x 90 cm	~ 2 mm x 2 mm	< 2.5 mm	± 0.60 mm
1.50 m	~ 160 cm x 130 cm	~ 3 mm x 3 mm	< 3.0 mm	± 1.50 mm
2.00 m	~ 220 cm x 180 cm	~ 4 mm x 4 mm	< 4.5 mm	± 2.00 mm
2.50 m	~ 280 cm x 230 cm	~ 5 mm x 5 mm	< 6.0 mm	± 4.00 mm

Accessories

Mounting systems

Terminal and alignment brackets

	Brief description	Type	Part no.
	2x clamps and 2x screws	2x clamps, 2x screws	2077709
	Bracket including clamps and screws	Mounting set (2-part) incl. clamps and screws	2077710


Reflectors and optics

Optics cloths

	Brief description	Type	Part no.
	Cloth for cleaning optical surfaces	Lens cloth	4003353

4DproConnectivity


Modules

	Brief description	Type	Part no.
	Connection device basic for connecting one sensor with 2 A fuse, 5 cable glands and RS-232 interface to sensor via M12, 17-pin female connector, all outputs available on screw/spring-loaded terminals.	CDB650-204	1064114

Plug connectors and cables




Plug connectors and cables

- **Signal type/application:** Gigabit Ethernet

	Connection type head A	Connection type head B	Cable	Length of cable	Type	Part no.
	Male connector, M12, 8-pin, angled, X-coded	Male connector, RJ45, 8-pin, straight	8-wire, AWG26	2 m	YN2X18-020EG1MRJA8	2094783
				5 m	SSL-2J08-M05MACE	2094784
				10 m	SSL-2J08-M10MACE	2094785
	Male connector, M12, 8-pin, straight, X-coded	Male connector, RJ45, 8-pin, straight	8-wire, CE, UL	2 m	YM2X18-020EG1MRJA8	2106258
				5 m	YM2X18-050EG1MRJA8	2106259

Plug connectors and cables

- **Signal type/application:** Power, serial, CAN, digital I/Os

	Connection type head A	Connection type head B	Cable	Length of cable	Type	Part no.
	Female connector, M12, 17-pin, straight, A-coded	Flying leads	17-wire, suitable for 2 A, Changed color coding of the flying leads, stripped	2 m	YF2ASD-020XXXXLECX	2081094
				3 m	YF2ASD-030XXXXLECX	2070425
				5 m	YF2ASD-050XXXXLECX	2070426
				10 m	YF2ASD-100XXXXLECX	2070427
	Female connector, M12, 17-pin, angled, A-coded	Flying leads	17-wire, 3-A suitable, Changed color coding of the flying leads, stripped	3 m	YG2ASD-030XXXXLECX	2102509
				5 m	YG2ASD-050XXXXLECX	2102510
	Female connector, M12, 17-pin, straight, A-coded	Male connector, M12, 17-pin, straight, A-coded	To connection module CDB650, 17-wire, suitable for 2 A	3 m	YM2A8D-030XXXF2A8D	6051194

WORKING WITH SICK IN A DIGITAL WORLD

Making your digital business environment comfortable

Find a suitable solution in next to no time

- Online product catalog
- Application Solver
- Online configurators and selectors

My SICK is your personal self-service portal

- Open around the clock
- Clear product information
- Company-specific price conditions
- Convenience during the ordering process
- Document overview
- Availability and delivery times

Register now:

→ www.sick.com/myBenefits

Even more value

- Digital Customer Trainings → www.sick.com/c/g300887
- Digital Service Catalog → cloud.sick.com
- SICK AppPool → apppool.cloud.sick.com



SICK AT A GLANCE

SICK is a leading manufacturer of intelligent sensors and sensor solutions for industrial applications. With more than 11,900 employees and over 50 subsidiaries and equity investments, as well as numerous international agencies, SICK is always close to its customers. An extensive range of products and services creates the ideal basis for controlling processes securely and efficiently, protecting individuals from accidents and preventing damage to the environment.

SICK has extensive experience in various industries and understands their processes and requirements. With intelligent sensors, SICK delivers exactly what the customers need. In application centers in Europe, Asia, and North America, system solutions are tested and optimized in accordance with customer specifications. All this makes SICK a reliable supplier and development partner.

Comprehensive services round out the offering: SICK LifeTime Services provide support throughout the machine life cycle and ensure safety and productivity.

That is “Sensor Intelligence.”

Worldwide presence:

Australia, Austria, Belgium, Brazil, Canada, Chile, China, Czech Republic, Denmark, Finland, France, Germany, Great Britain, Hungary, Hong Kong, India, Israel, Italy, Japan, Malaysia, Mexico, Netherlands, New Zealand, Norway, Poland, Romania, Singapore, Slovakia, Slovenia, South Africa, South Korea, Spain, Sweden, Switzerland, Taiwan, Thailand, Turkey, United Arab Emirates, USA, Vietnam.

Detailed addresses and further locations → www.sick.com