





FingerTec Q2i is a premium biometrics security device with advanced time attendance and access control features suitable for medium to large organizations. Q2i can provide your company with accurate and reliable data at all times providing convenience and effectiveness all at once from one system, and it is has been made versatile with many customizable features. Connect Q2i to FCC data storage and cloud-based attendance system subscriptions, TimeTec TA to totally eliminate manual data download process for effective operation.



Variety of Verification Methods

Choose from fingerprint, card, password or the combination of these verification methods for a more secure system.



Supersized Capacity

Get up to 10000 fingerprint templates and 200000 transaction logs – more than enough to fulfill the requirements of an SME.

TCP/IP RS232/RS485



Shortcut Keys

Program these keys to take you to the commonly used functions in just one step.



Built-In Alarm

Increase the security at your workplace by installing an external alarm, and be alerted during unexpected scenarios such as break-ins and fire emergencies.



YEARS LIMITED WARRANTY 28 Months for Reseller





Manage Your Data Easily

Administration of data is easy with the bundled software, Ingress. With Ingress you can remotely manage all door activities of the connected terminals and get time attendance functions too.



Vorkcodes

Use Workcode feature to let your staff report their whereabouts when they clock.



Easy Data Sync

Q2i offers various options for data transfer including TCP/IP, RS485, RS232, USB flash disk and Wifi (additional module) to make data syncing easier.



Full Colour Screen

This model comes with a full colour TFT screen. Display pictures, corporate advertisements, screen savers and much more on the colour screen of the terminals.

WEB LINK



https://product.fingertec.com/userguide.php



Quick Start Guide



Installation Guide



₹" Video Guide



* Technical Tips



Ingress Software https://product.fingertec.com/userguide.php




PackagingDimension (mm) : 245 (L) x 90 (W) x 225 (H)
Weight : 1.74kg








LAYOUT PLAN

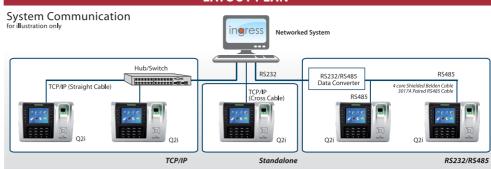

Installation Diagram

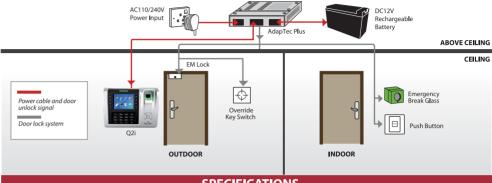

OUTDOOR		INDOOR	
	SPECIFICATION	ONS	
MODEL	SPECIFICATIONS O2i		
MODEL	Acrylonitrile butadiene styrene (ABS)		
SURFACE FINISHING TYPE OF SCANNER	Non coated optical scanner		
MICROPROCESSOR	800 MHz		
MEMORY	256 MB flash memory & 64 MB SDRAM		
ALGORITHM	BioBridge VX 9.0 / VX 10.0		
PUSH TECHNOLOGY	Yes		
DIMENSION (L x W x H), mm	200 x 56 x 160		
STORAGE	200 X 30 X 100		
	10000		
Fingerprint templates Cards	10000		
Transactions	200000		
ENROLLMENT & VERIFICATION	200000		
	Fig. 11 and 11 and 11 and 12 a		
Methods	Fingerprint (1:1, 1:N), card & password		
Recommended fingerprint per user ID	2		
Fingerprint placement	Any angle		
Verification time (sec)	<1		
FAR (%)	< 0.0001		
FRR (%)	<1		
CARD TECHNOLOGY			
RFID: 64-bit, 125kHz	Yes		
MIFARE: MFIS50/S70, 13.56MHz	Made to order		
HID: HID 1325, 26-bit, 125kHz	Made to order		
COMMUNICATIONS			
Method	TCP/IP, RS232, RS485, USB disk (Optional: WiFi.& 3G)		
Baud rates	9600,19200,38400,57600,115200		
Wiegand	26-bit input/output		
OPERATING ENVIRONMENT			
Temperature (°C)	0 ~ 45		
Humidity (%)	20 ~ 80		
Power input	DC 12V 3A		
TIME ATTENDANCE			
Siren	Built- in (Optional - Extern	al)	
Work codes	Yes		
MULTIMEDIA			
Voice	Yes		
Display	3.5" 65k color TFT scr	een	
Photo ID	Yes		
Short messaging	Yes		
MULTIMEDIA			
EM lock driving output	DC12V 3A /relay output		
Alarm output	NO/NC		
Antipassback	Yes		
VOICE / DISPLAY LANGUAGE (TERMINAL)	English (Standard), A Portuguese (Portuga		
	Other languages are	available upon request.	

NOTE: Specifications are subject to change. Check http://product.fingertec.com for latest product information.



