




# ECONLITE

EM-11PC & EM-11R  
High Efficiency

Energy Conserving Emergency Lighting Luminaire

## Dimension

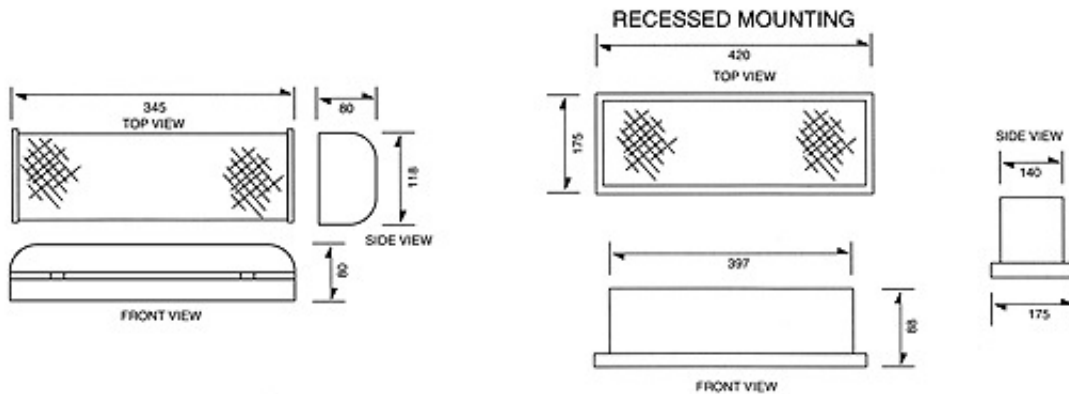

## Technical Data

<b>Mode of Operation</b>	Non-Maintained
<b>Input Voltage</b>	230V/240V±10% - 50Hz
<b>Battery</b>	Hi-Temp. Nickel Cadmium Battery
<b>Charging Current</b>	120mA (Nominal)
<b>Lamp Used</b>	1 x 8 Watt Fluorescent Tube
<b>Operation Temperature</b>	-10°C to 60°C
<b>Charger</b>	Fully Automatic Constant Current. Solid-State Electronics Provide High Reliability with Trickle Charge-Facility.
<b>Indication</b>	Red L.E.D. "On" Indicates Charging. Equipped with Push Test-Switch to Simulate Power Failure.
<b>Backup Time</b>	3 Hours Duration.
<b>Construction</b>	Electro-Galvanised Steel Casing of High Reflectance Finished with Corrosion Resistant Epoxy Spray Coating.
<b>(EM-11PC)</b>	Injection Moulded Fire-Retardant ABS Polyester Housing with side knockout Cable Entry. Injection Moulded Fire-Retardant Polycarbonate Base & Acrylic Diffuser.
<b>(EM-11R)</b>	Electro-Galvanised Steel Casing of High Reflectance Finished with Corrosion Resistant Epoxy Spray Coating.
<b>Weight</b>	EM-11PC <u>Q</u> 1.0kg / EM-11R <u>Q</u> 2.6kg
<b># Warranty</b>	5 Years
<b>Compliance</b>	Malaysia Standards MS-619, IP-20 Luminaire