




ECONLITE

PR-213 & PR-213R
 Slimline Design For Elegant Look
Self-Contained Emergency Keluar Sign

Dimension

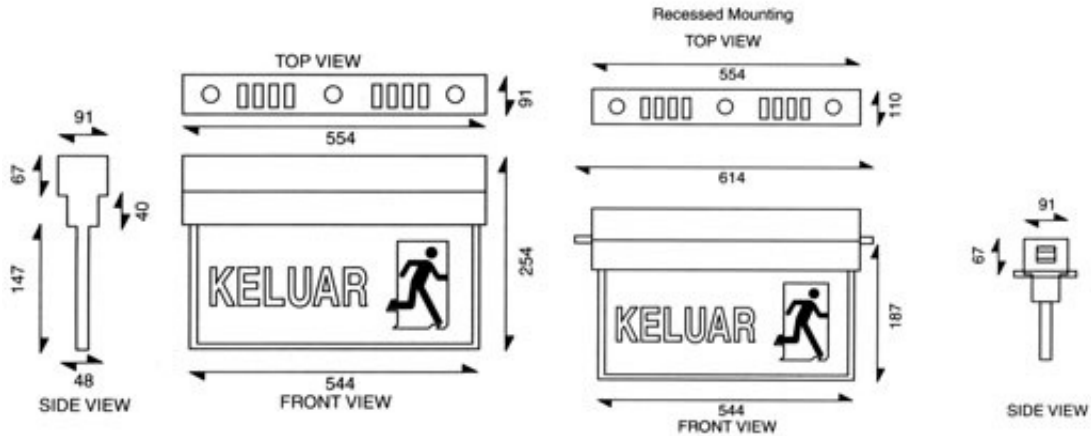

Technical Data

Mode of Operation	Sustained
Input Voltage	230V/240V±10% - 50Hz
Battery	Hi-Temp. Nickel Cadmium Battery.
Charging Current	300mA (Nominal)
Lamp Used	2 x 13 Watts Fluorescent Tubes
Operation Temperature	-10°C to 60°C
Charger	Fully Automatic Constant Current. Solid-State Electronics Provide High Reliability with Trickle Charge-Facility.
Indication	Red L.E.D. "On" Indicates Charging. Equipped with Push Test-Switch to Simulate Power Failure.
Backup Time	3 Hours Duration.
Construction	Electro-Galvanised Steel Casing of High Reflectance Finished with Corrosion Resistant Epoxy Spray Coating.
Weight	<u>Q</u> 3.2kg – PR 213 / <u>Q</u> 3.4kg – PR 213R
# Warranty	5 Years
Compliance	Malaysia Standards MS:983:2000, IP20