

# UNI-E

## Variable Speed Drive Home Booster Pump

### Benefits



### Applications



Landed properties



Shower & bathroom



Household

### Features

- Built-in overload protection
- Easy set point adjustment, plug and play capability
- Actual pressure readout
- Auto restart on power failure
- Low voltage dry run float sensor connector
- Dry running (secondary) protection with built-in VSD
- Easy installation, setting and operation

### Technical specifications

Supply Voltage : 1 x 220 - 240V, 50Hz


Insulation Class : F

Enclose Class : IP20

Liquid Temperature : 0°C to 90°C


Pump type	Dimension (Length x Height x Width mm)	Pipe Connections	
		Suction	Discharge
UNI-E CM 3-5	350 x 650 x 200	Rp 1"	Rp 1"
UNI-E CM 5-4	400 x 650 x 200	Rp 1 1/4"	Rp 1"
UNI-E CM 5-5	400 x 650 x 200	Rp 1 1/4"	Rp 1"
UNI-E CM 10-2	400 x 700 x 200	Rp 1 1/2"	Rp 1"

Performance curves

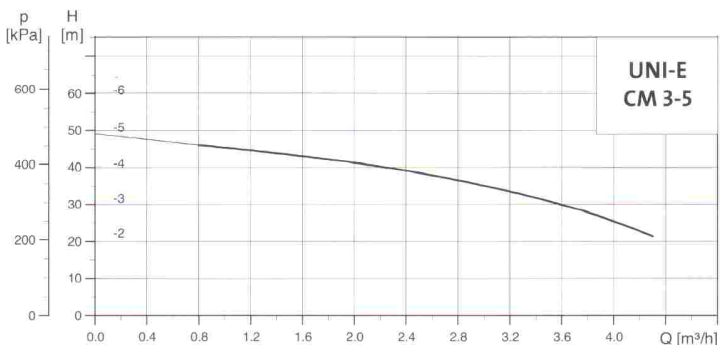


Technical Data


Motor (kW)	Operating Pressure (bar / PSI)	Recommended fittings
0.65	2.5 / 36.25	

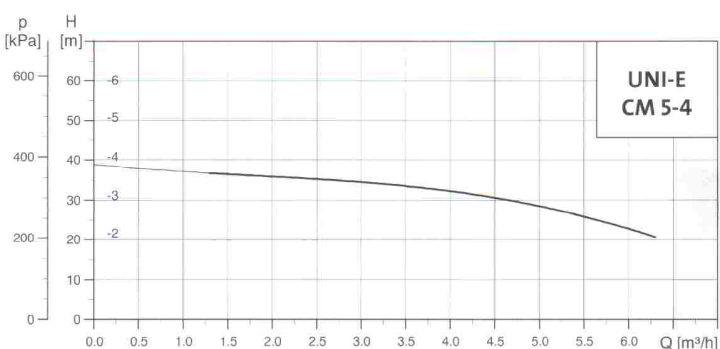

Motor (kW)	Operating Pressure (bar / PSI)	Recommended fittings
0.84	2.5 / 36.25	

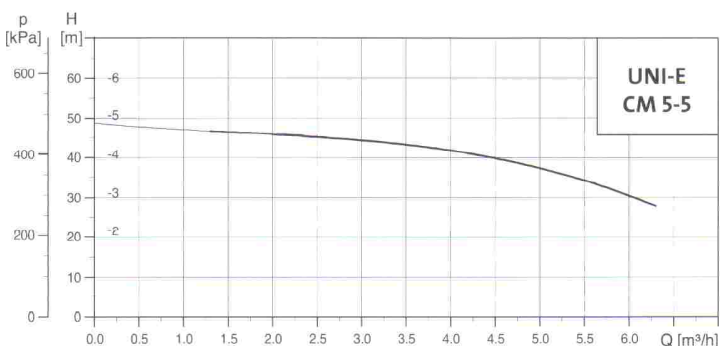

Motor (kW)	Operating Pressure (bar / PSI)	Recommended fittings
1.20	3 / 43.50	

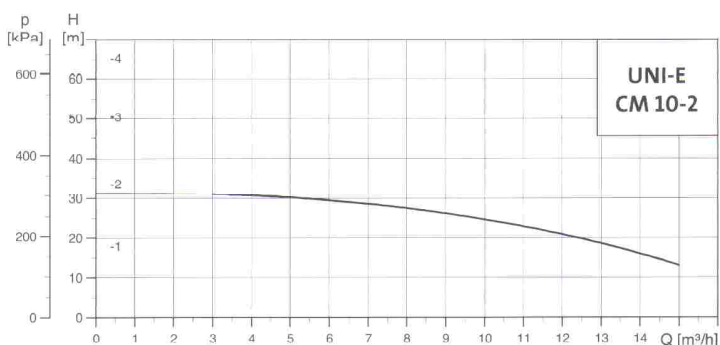

Motor (kW)	Operating Pressure (bar / PSI)	Recommended fittings
1.20	2.5 / 36.25	