

BWS™ OUTDOOR FILTRATION SYSTEM




Hollow Fibre Membrane
(Membrane material: PAN)



Technical Specifications

BWS Model	UF1900
Diameter x Length (mm)	102 x 1016
Flowrate (lit/hr)	1900
Housing Material	SUS 304 Stainless Steel
Connector Inlet	3/4"
Connector Outlet	1/2"
End Cap	Nylon Black
Filter Material	Hollow Fiber
Automatic Flushing	Optional
Max Working Pressure	4.5 bar

Internal Pressure Filtration

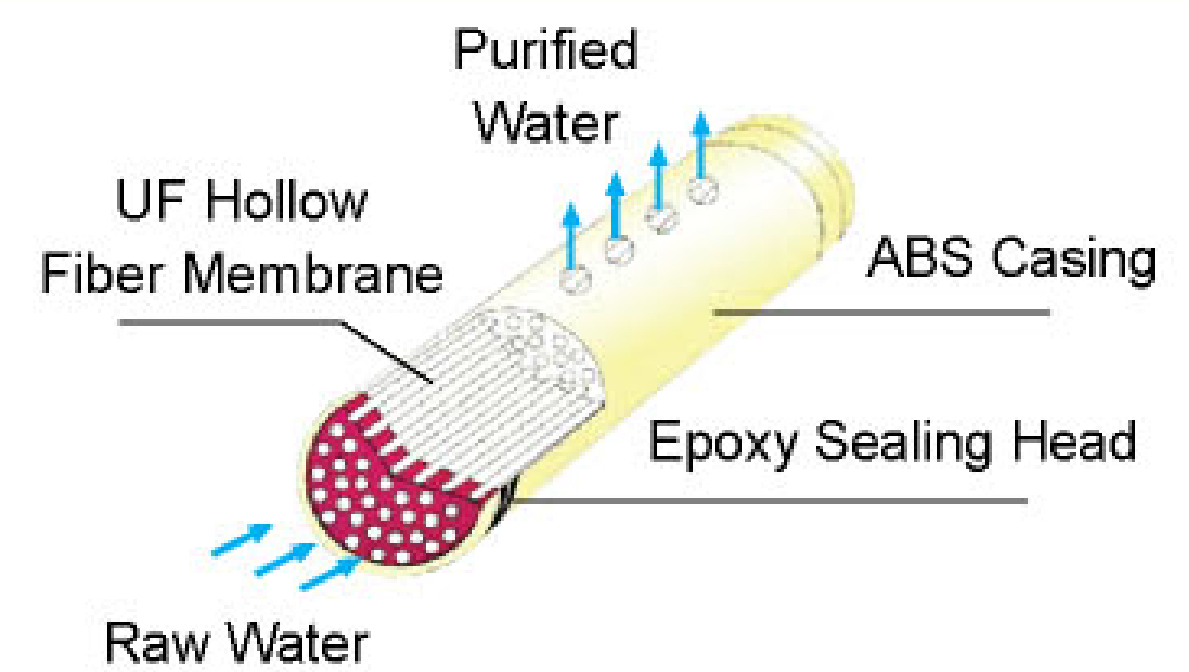

During the filtration, the liquid will enter from the inside of the hollow fibers, the micromolecule materials will permeate through the membrane and arrive at the outside of the hollow fiber to become the ultrafiltrate while the macro-molecule materials such as the colloid and bacteria will be withheld inside the hollow fibers and become the concentrate.



Preserves Mineral



Density up to 0.01 micron



Bacteria Guard



SUS304 Stainless Steel Casing



Automatic Daily Flushing System

Dealer's Company Stamp :

