

TRADE GOODS

To offer even better service and to save you time and money in your ordering processes, we also offer some other products German manufacturers as trading products.

FLANGED BALL VALVES


Characteristics

PS	16 bar
Ambient temperature	-20 to +60 °C
Housing Material	Sphäroguß
Corrosion protection	Grundierung
Gas specification	gas families 1, 2, 3 (DVGW - G 260) and non-aggressive gases. (other gases on request)

Design and function

Our flanged ball valves consist of a two-piece spheroidal graphite cast iron housing and are fire-safe designed.

The sliding ball on the inside, sealed on three sides, is adjusted via the handle. Optionally, the handle can be replaced with an electric or pneumatic rotary drive.

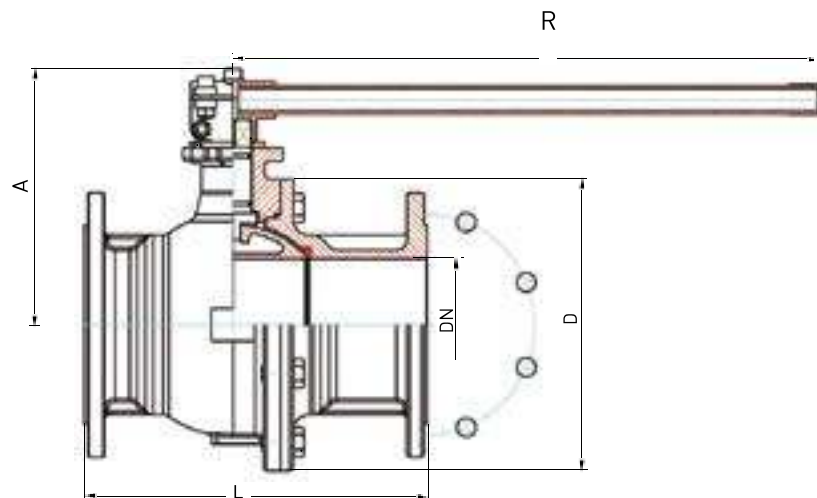

Options

- Special paint finishes

Dimensions / Nominal size

	DN 25	DN 32	DN 40	DN 50	DN 65	DN 80	DN 100	DN 125	DN 150	DN 200
L [mm]	125	140	150	165	185	200	220	250	285	400
A [mm]	114	125	135,5	142,5	158	185,5	202,5	223	235	316
R [mm]	165	165	185	185	230	360	360	360	555	715
D [mm]	115	140	150	165	185	200	220	250	285	415
Connection type	DIN 1092 - PN16									
Weight [kg]	3,2	4,7	5,7	7,6	12	15,5	22,6	30,4	42	119,4