

REGULATORS BALANCED ZERO 700 °F SERVICE

MODEL: 5113- BZR-700

Revision: 0

BULLETIN
5113

DESCRIPTION


The BZR-700 is designed for flow ratio control of high-temperature vaporized fuels such as JP-series fuels, kerosene, and naphtha. It is rated for continuous duty service to temperatures of 700 °F.

Construction features a stainless steel main and balancing diaphragm and stainless steel valve disc with high-temperature gasketing.

BZR-700 Series Balanced Zero Regulators are used for precise control of heated gases or for equipment locations subjected to high ambient temperatures. They are designed for continuous operation up to 700 °F and to resist corrosion from high sulphur or other corrosive gases. The special high temperature construction does not sacrifice performance.

The BZR-700 series regulators duplicate the precise control characteristics of the standard BZR Regulators. They automatically adjust valve position to hold a desired precise outlet pressure. Slight variations in inlet pressure do not affect the performance.

For installation, see Bulletin 5101 Installation.

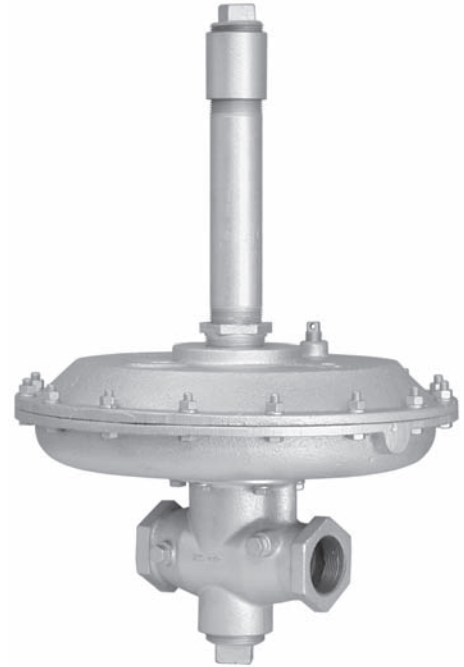

CAPACITY TABLE

Model Number	Pipe Size		SCFH Gas Flow @ 4.0" W.C. Pressure Drop			
	Inlet	Outlet	MFD.	NAT.	AIR	L.P.
			0.4 Sp. Gr.	0.6 Sp. Gr.	1.0 Sp. Gr.	1.5 Sp. Gr.
12 - BZR - 700	1-1/2"	1-1/2"	3,160	2,580	2,000	1,640
20 - BZR - 700	2-1/2"	2-1/2"	7,900	6,450	5,000	4,100
24 - BZR - 700	3"	3"	12,600	10,300	8,000	6,500

FEATURES

- Accuracy:
 - Low - Flow: $\pm 0.1''$ W.C.
 - Full - Flow: $\pm 0.3''$ W.C.
- Turndown up to 200:1
- Continuous operation to 700 °F
- For use with high-temperature vaporized fuels such as JP-series fuels, kerosene, and naphtha
- All units factory tested and sealed before shipment
- Maximum inlet pressure: 5.0 psig
- Maximum pressure differential: 14.0" W.C.
- Sensitivity - Responds to signal pressure differential as low as 0.04" W.C.

CAUTION: Operation of combustion equipment can be hazardous resulting in bodily injury or equipment damage. Each burner should be supervised by a combustion safeguard and only qualified personnel should install, make system adjustments and perform any required service.



PYRONICS

A Selas Heat Technology Brand

11012 Aurora Hudson Road
Streetsboro, OH 44241
Email: sales@selas.com


Toll Free: 800-883-9218
Main: 216-662-8800
Fax: 216-663-8954

NOTICE: PYRONICS practices a policy of continuous improvement in the design of its products. It reserves the right to change the specifications at any time without prior notice.

REGULATORS BALANCED ZERO 700 °F SERVICE

BULLETIN 5113
PAGE NO. 2

DIMENSIONS: 1-1/2" - 3" SIZES

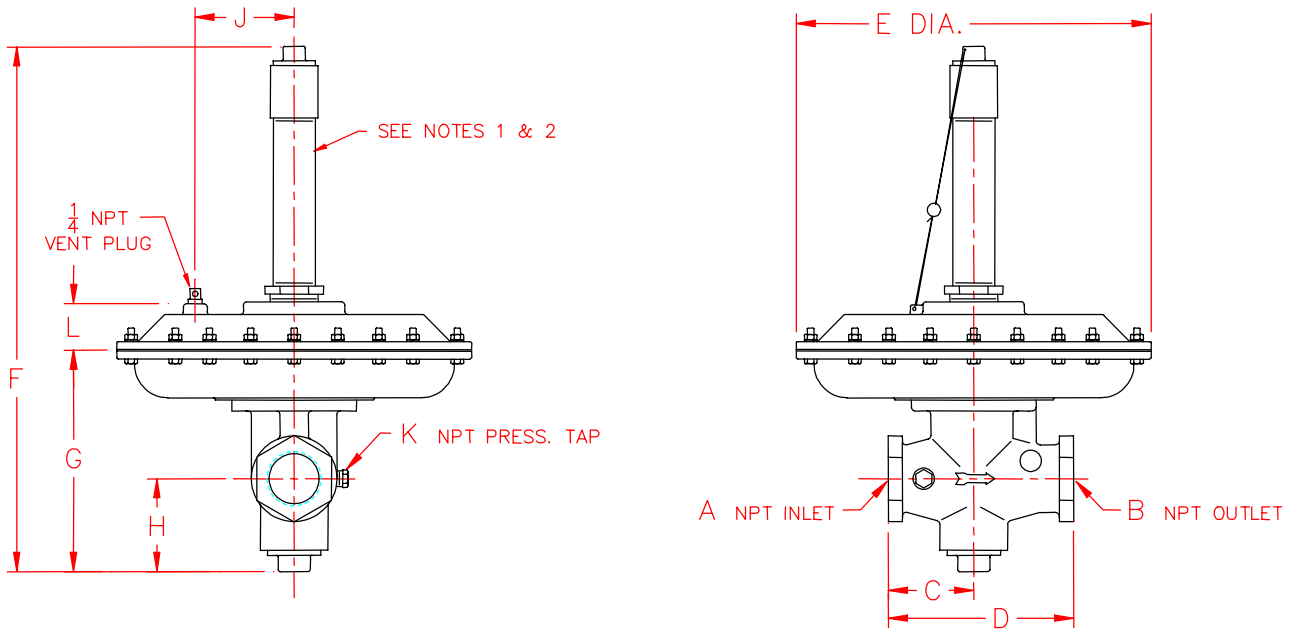

Model Number	A	B	C	D	E	F	G	H	J	K	L	Weight Lbs.
12 - BZR - 700	1-1/2	1-1/2	3	6-1/2	14	20-1/8	8-1/8	3-1/4	3-5/8	1/4	1-7/8	55.0
20 - BZR - 700	2-1/2	2-1/2	4	8-3/4	19	28-1/2	10	3-5/8	7	1/4	2-1/4	126.0
24 - BZR - 700	3	3	5-3/4	11-1/2	19	30-1/4	11-3/4	4-5/8	7	1/4	2-1/4	136.5

NOTES:

1. Spring housing must be perpendicular to pipe run in an upright position.
2. Gas pipe run must be horizontal and level.
3. All dimensions are in inches.

ORDERING INFORMATION

1. Specify Inlet and Outlet Pressure.
2. Type of Gas, Flow, Specific Gravity and Temperature.
3. Specify Model Number and Quantity.
4. Shipping Instructions.