

## 400W Single Output Switching Power Supply

HF400W-S Series



### FEATURES

- High reliability
- Japanese brand components for key parts
- Electrolytic capacitors all 105°C
- Built-in fan speed control
- 100% full load burn-in test
- Protections: overload/ over voltage/ over temperature/ short circuit
- 5 years limited warranty
- F630 241 x 124 x 65mm

### SPECIFICATIONS

Input Voltage	170~264VAC (210~370VDC)
Input Current	4.5A
Input Frequency	47~63Hz
Inrush Current	cold start, 40A/230V
Input Leakage Current	< 0.7mA/230VAC
Line Regulation (full load)	± 0.5%
Voltage Adjust Range	± 10%
Output Overload Protection	110~130%, current limiting, auto recovery
Output Over Voltage Protection	115~150%, shut off, re-power on to recover
Short Circuit Protection	current limiting, auto recovery
Rise Time	50ms @full load (typical)
Hold up Time	20ms @full load (typical)
Mechanical Feature	enclosed
Dimensions	241 x 124 x 65mm (L x W x H)

Operating Temperature	-20°C ~+70°C(ref. derating curve)
Storage Temperature	-20°C ~+85°C
Operating Humidity	20%~93%RH(non condensing)
Storage Humidity	20%~95%RH(non condensing)
MTBF	>100,000 hours
Cooling	by fan, speed controlled by internal temperature, low speed before the setting point, and full speed after the setting point
Safety Standards	design refer to GB4943, UL60950, EN60950
EMC Standards	design refer to GB9254, EN55022 Class A
Withstand Voltage	I/P -O/P: 1.5KVAC/1min I/P - PE: 1.5KVAC/1min O/P-PE: 0.5KVAC/1min
Vibration	10~150Hz, 2G 10min/1cycle, 30min each along X, Y, Z axes
Connection	9P/9.5mm screw terminal block
Packing	1.2kgs, 16pcs/21kgs/0.043CBM per carton


Model No.	DC Output	Rated Power	Load Regulation	Voltage Tolerance	Ripple & Noise (max.)	Efficiency
HF400W-S-12	12V 33.0A	396.0W	0.5%	± 1%	150mVp-p	83%
HF400W-S-24	24V 17.0A	408.0W	0.5%	± 1%	150mVp-p	86%
HF400W-S-36	36V 13.0A	468.0W	0.5%	± 1%	200mVp-p	87%
HF400W-S-48	48V 8.3A	398.4W	0.5%	± 1%	240mVp-p	85%

\* 12~48VDC output all available

### NOTE

1. All parameters are measured at 230VAC input, rated load and 25°C ambient temperature.
2. Line regulation is measured from low line to high line at rated load.
3. Load regulation is measured from 0% to 100% of rated load for single output models. For multi-output models, it is measured from 20% to 100% of rated load, and other output at 60% rated load.
4. Ripple & noise are measured at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1uF & 47uF parallel capacitor.
5. The power supply is regarded as a component which will be installed into the final equipment. The final equipment must be re-confirmed that it still meets EMC directives.

**Drawing**

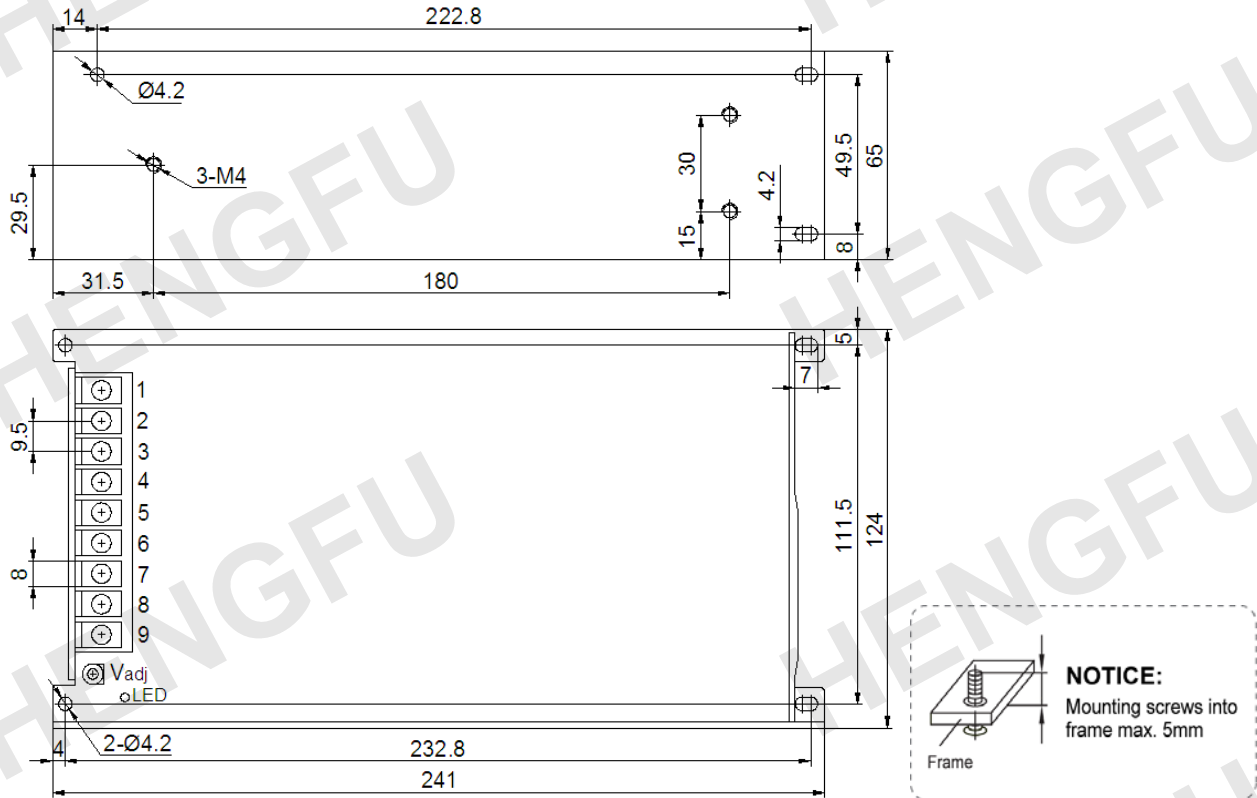

Terminal Pin No. Assignment

Pin No.	Assignment	Pin No.	Assignment
1	AC/L	4,5,6	DC OUTPUT -V
2	AC/N	7,8,9	DC OUTPUT +V
3	PE		

**Derating Curve**

