

300W DC/DC Switching Power Supply

HF300W-SD Series



FEATURES

- Full DC input range
- High reliability
- Japanese brand components for key parts
- Electrolytic capacitors all 105°C
- Forced air cooling by built-in fan
- 100% full load burn-in test
- Protections: overload/ over voltage/ over temperature/ short circuit
- 5 years limited warranty
- F630C 215 x 115 x 50mm

SPECIFICATIONS

DC Input Voltage	24V(18~36), 48V(36~72) 110V(72~144)VDC
Line Regulation (full load)	± 0.5%
Voltage Adjust Range	± 10%
Output Overload Protection	105~150%, hiccup mode, auto recovery
Output Over Voltage Protection	115~150%, shut off, re-power on to recover
Short Circuit Protection	hiccup mode, auto recovery
Rise Time	50ms @full load (typical)
Mechanical Feature	enclosed
Dimensions	215 x 115 x 50mm (L x W x H)
Operating Temperature	-20°C ~+50°C
Storage Temperature	-20°C ~+85°C
Operating Humidity	20%~93%RH(non condensing)
Storage Humidity	20%~95%RH(non condensing)


MTBF	>100,000 hours
Cooling	by fan, full speed when power on
Safety Standards	design refer to GB4943, UL60950, EN60950
EMC Standards	design refer to GB9254, EN55022 Class A, EN61000
Withstand Voltage	I/P -O/P: 1.5KVAC/1min I/P - PE: 1.5KVAC/1min O/P-PE: 0.5KVAC/1min
Isolation Resistance	>100MΩ@500VDC
Vibration	10~150Hz, 2G 10min/1cycle, 30min each along X, Y, Z axes
Connection	9P/9.5mm screw terminal block
Packing	1.2kgs, 16pcs/21kgs/0.045CBM per carton

Model No.	DC Output	Rated Power	Load Regulation	Voltage Tolerance	Ripple & Noise (max.)	Efficiency
HF300W-SD24-12	12V 25.0A	300.0W	0.5%	± 1%	150mVp-p	83%
HF300W-SD48-12	12V 25.0A	300.0W	0.5%	± 1%	150mVp-p	84%
HF300W-SD110-12	12V 25.0A	300.0W	0.5%	± 1%	150mVp-p	84%
HF300W-SD24-24	24V 12.5A	300.0W	0.5%	± 1%	150mVp-p	83%
HF300W-SD48-24	24V 12.5A	300.0W	0.5%	± 1%	150mVp-p	86%
HF300W-SD110-24	24V 12.5A	300.0W	0.5%	± 1%	150mVp-p	88%
HF300W-SD24-48	48V 6.3A	302.4W	0.5%	± 1%	240mVp-p	86%
HF300W-SD48-48	48V 6.3A	302.4W	0.5%	± 1%	240mVp-p	85%
HF300W-SD110-48	48V 6.3A	302.4W	0.5%	± 1%	240mVp-p	89%

NOTE

1. All parameters are measured at rated input voltage, rated load and 25°C of ambient temperature.
2. Line regulation is measured from low line to high line at rated load.
3. Load regulation is measured from 0% to 100% of rated load for single output models. For multi-output models, it is measured from 20% to 100% of rated load, and other output at 60% rated load.
4. Ripple & noise are measured at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1uF & 47uF parallel capacitor.
5. The power supply is regarded as a component which will be installed into the final equipment. The final equipment must be re-confirmed that it still meets EMC directives.

Drawing

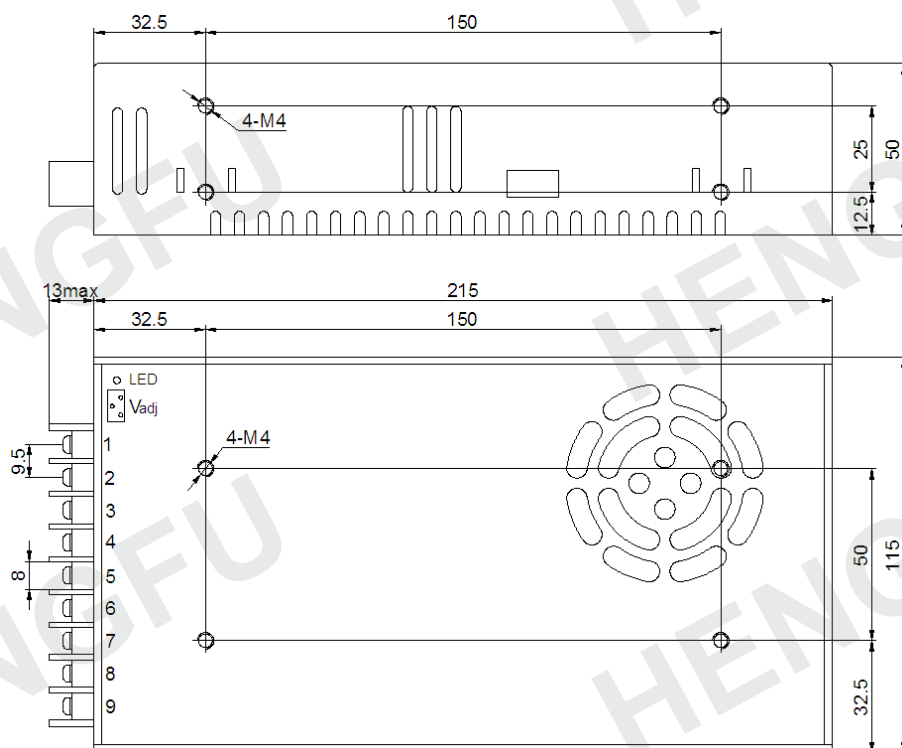

Length of assembly screw: max. 6mm

Terminal Pin No. Assignment

Pin No.	Assignment	Pin No.	Assignment
1,2,3	DC OUTPUT +V	7	PE
4,5,6	DC OUTPUT -V	8	DC INPUT +V
		9	DC INPUT -V