



◆Feature

- .Constant voltage design
- .Universal AC input / Full range
- .Small dimension, High efficiency, High reliability, Long lifetime
- .Ip66 design for outdoor installation
- .Working temperature: -25℃~+50℃
- .Protections: Overload, Over voltage, Short-circuit, etc.
- .Typical efficiency: 88%
- .CE\UL\IP66 certified, RoHS compliant
- .100% full load burn-in test.

SPECIFICATION


Model Number		VF-12040D1310	VF-24040D1310		
Output	DC Voltage	12V	24V		
	Rated current	3.34A	1.67A		
	Current range	0-3.34A	0-1.67A		
	Rated power	40W	40W		
	Ripple and Noise(max.) Note4	120mVp-p	120mVp-p		
	Voltage tolerance Note3	±4%	±2%		
	Line regulation	±1%	±0.5%		
	Load regulation	±2%	±1.5%		
	Output groups	1	1		
	Set up time Note6	2000ms, 50ms(at full load) 110Vac/230Vac			
	Holding time(Typ.)	15ms(at full load) 110Vac/ 230Vac			
Input	Voltage range Note 2	90~305Vac or 127~432Vdc			
	Frequency range	47~63Hz			
	Power factor(Typ.)	PF≥0.50/110V(at full load) PF≥0.45/230V(at full load)			
	Efficiency(Typ.)	87.5%	88%		
	AC current	0.91A/110Vac 0.45A/230Vac			
	Inrush current(Typ.)	Cold start: 50A/230Vac			
	Leakage current	<0.75mA/240Vac			
Protection	Over load	102%-135% of the rated output power Protection mode: constant current limiting, recovers automatically after the load reduced.			
	Short circuit	Protection type: Hiccup mode, recovers automatically after fault conditions removed			
	Over voltage	13.0-18.0V	24.5-35.0V		
		Protection type: Hiccup mode, recovers automatically after fault conditions removed			
	Over temperature	100℃±10℃(RTH2) Protection type: Shut down O/P voltage, recovers automatically after temperature goes down.			
Environment	Working temperature	-25℃~+50℃			
	Working humidity	10%~90%RH, non-condensing			
	Storage temp. and humidity	-25℃~+75℃, 5%~95%RH			
	Temp. coefficient	±0.05%/℃ (0~40℃)			
	Vibration	10-300Hz, 1G 10min./cycle, period for 60min. each along X, Y, Z axes			
Safe and EMC	Safety standards	Compliance to UL8750,EN61347-1, EN61347-2-13, Ip66 waterproof rating.			
	Withstand voltage	I/P-O/P: 3.75KVAC I/P-FG: 1.875KVAC O/P-FG: 0.5KVAC			
	Insolation resistance	I/P-O/P, I/P-FG, O/P-FG: 100Mohms/500Vdc 25℃/70%RH			
	EMC Emission	/			
	EMC Immunity	/			
Others	MTBF	≥200Khrs, MIL-HDBK-217F(25℃)			
	Dimension	144X47X34mm(L*W*H)			
	Packing	0.35Kg/PCS, 50PCS/17.5Kg/box, (415X325X205mm)			

NOTE


1. All parameters NOT specially mentioned are measured at 230VAC input, rated load and 25℃ of ambient temperature.
2. Derating may be needed under low input voltages. Please check the static characteristics for more details.
3. Tolerance: includes set up tolerance, line regulation and load regulation.
4. Ripple & noise are measured at 20MHZ of bandwidth by using twisted pair-wire terminated with a 0.1uf & 47uf parallel capacitor.
5. The power supply is considered as a component that will be operated in combination with final equipment. Since EMC performance will be affected by the complete installation, the final equipment manufacturers must re-confirm EMC Directive on the complete installation.
6. The start time was tested under the situation of cold star, continuous switching on/off may raise the start time.

■ Mechanical Specification


Case No. D1310 Unit: mm

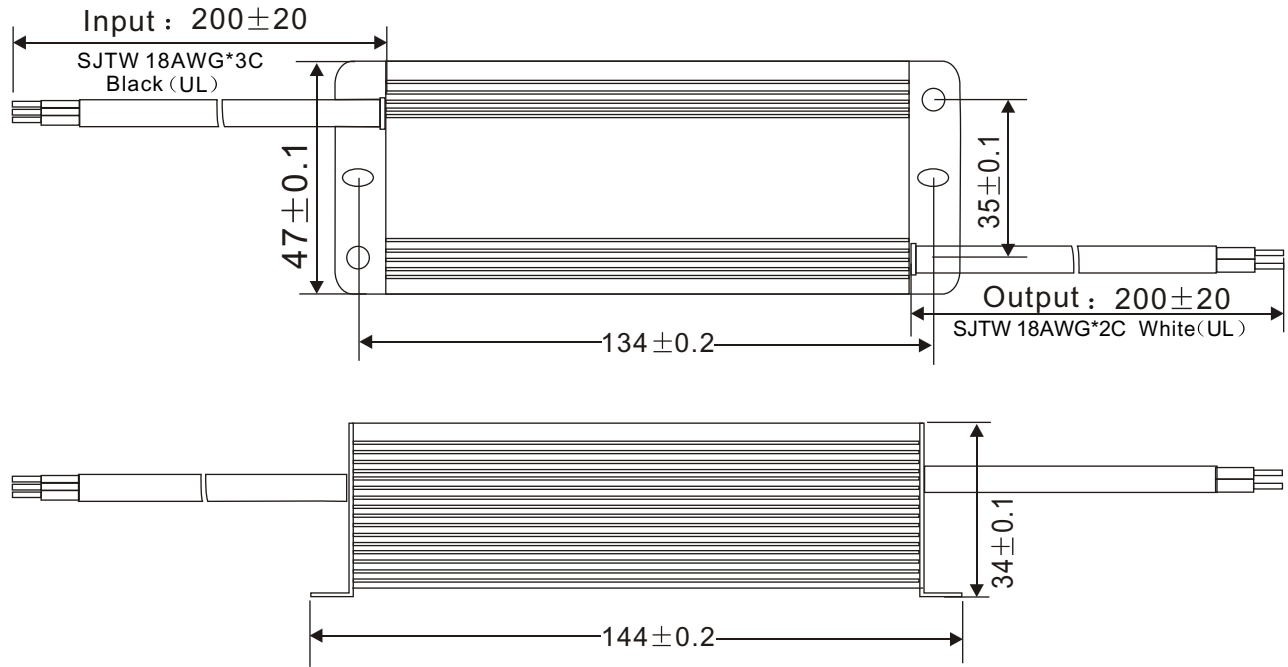

■ Derating Curve

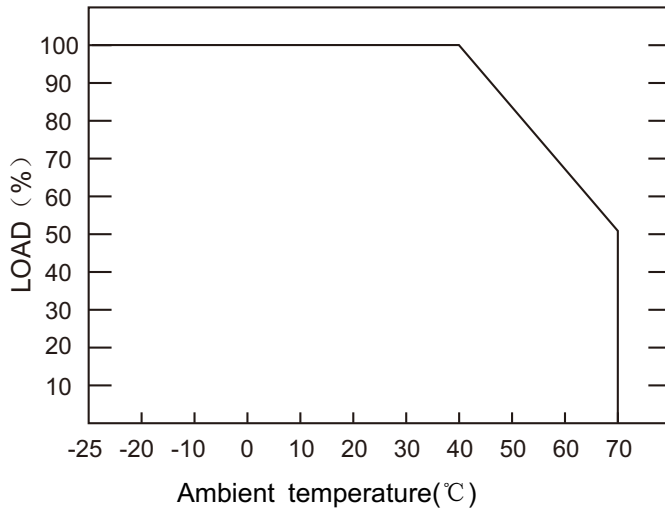

■ Static Characteristics

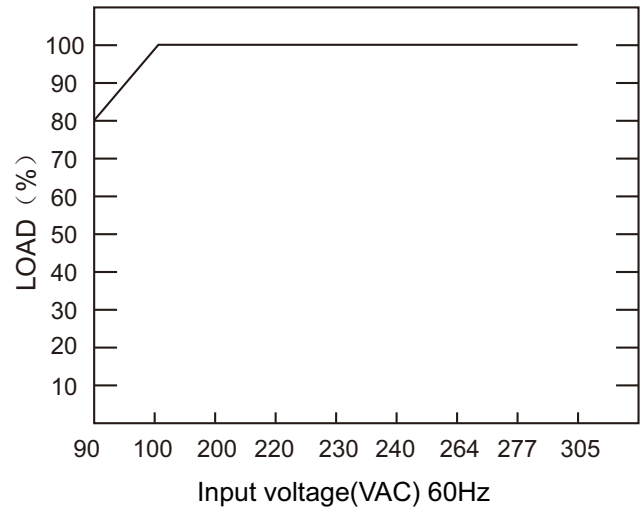

The above is Taurus standard product, customized product is available. We TAURAS has the right to ultimate interpretation.

Designed by		Standardization		D1310 type	Version: 2.0
Corrected by		Approved by		 金兴® 珠海市金兴科技有限公司 ZHUHAI TAURAS TECHNOLOGIES CO., LTD	
Checked by					