



◆Feature

- .Constant voltage design
- .High input voltage
- .Small dimension, High efficiency, High reliability, Long lifetime
- .Ip66 design for outdoor installation
- .Working temperature: -25℃~+50℃
- .Protections: Overload, Over voltage, Short-circuit, etc.
- .Typical efficiency: 86%
- .CE\IP66 certified, RoHS compliant
- .100% full load burn-in test.

SPECIFICATION


Model Number		VAS-12060D0922	VAS-24060D0922			
Output	DC Voltage	12V	24V			
	Rated current	5A	2.5A			
	Current range	0-5A	0-2.5A			
	Rated power	60W	60W			
	Ripple and Noise(max.) Note4	120mVp-p	240mVp-p			
	Voltage tolerance Note3	±4%	±2%			
	Line regulation	±1%	±0.5%			
	Load regulation	±2%	±1%			
	Output groups	1	1			
	Set up time Note6	2000ms, 50ms(at full load) 230Vac				
Input	Holding time(Typ.)	15ms(at full load) 230Vac				
	Voltage range Note 2	170~264Vac or 240~374Vdc				
	Frequency range	47~63Hz				
	Power factor(Typ.)	PF≥0.9/230V(at full load)				
	Efficiency(Typ.)	85%	86%			
	AC current	0.37A/230Vac				
	Inrush current(Typ.)	Cold start:60A/230Vac				
	Leakage current	<0.75mA/240Vac				
Protection	Over load	110%-130% of the rated output power Protection mode: constant current limiting, recovers automatically after the load reduced.				
	Short circuit	Protection type: Hiccup mode, recovers automatically after fault conditions removed				
	Over voltage	13.0-18V	25.0-34V			
	Over temperature	Ta:55℃~65℃ Protection type: Hiccup mode, recovers automatically after temperature goes down				
Environment	Working temperature	-25℃~+50℃				
	Working humidity	10%~90%RH, non-condensing				
	Storage temp. and humidity	-25℃~+75℃, 5%~95%RH				
	Temp. coefficient	±0.05%/℃ (0~40℃)				
	Vibration	10-300Hz, 1G 10min./cycle, period for 60min. each along X, Y, Z axes				
Safe and EMC	Safety standards	Compliance to EN61347-1, EN61347-2-13, Ip66 waterproof rating.				
	Withstand voltage	I/P-O/P: 3.75KVAC I/P-FG: 1.875KVAC O/P-FG: 0.5KVAC				
	Insolation resistance	I/P-O/P, I/P-FG, O/P-FG: 100Mohms/500Vdc 25℃/70%RH				
	EMC Emission	Compliance to EN55015, (CISPR22), EN61000-3-2, EN61000-3-3				
	EMC Immunity	Compliance to EN61547, EN61000-4-2,3,4,5,6,8,11				
Others	MTBF	≥200Khrs, MIL-HDBK-217F(25℃)				
	Dimension	253X40X22mm(L*W*H)				
	Packing	0.41Kg/PCS,40PCS/16.4Kg/box, (340X280X200mm)				

NOTE


1. All parameters NOT specially mentioned are measured at 230VAC input, rated load and 25℃ of ambient temperature.
2. Derating may be needed under low input voltages. Please check the static characteristics for more details.
3. Tolerance: includes set up tolerance, line regulation and load regulation.
4. Ripple & noise are measured at 20MHZ of bandwidth by using twisted pair-wire terminated with a 0.1uf & 47uf parallel capacitor.
5. The power supply is considered as a component that will be operated in combination with final equipment. Since EMC performance will be affected by the complete installation, the final equipment manufacturers must re-confirm EMC Directive on the complete installation.
6. The start time was tested under the situation of cold star, continuous switching on/off may raise the start time.

■ Mechanical Specification


Case No. D0922 Unit: mm

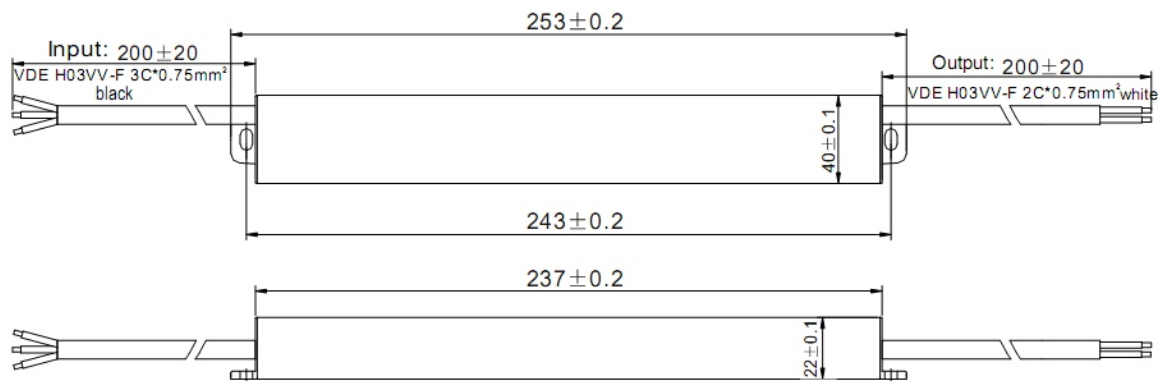

■ Derating Curve

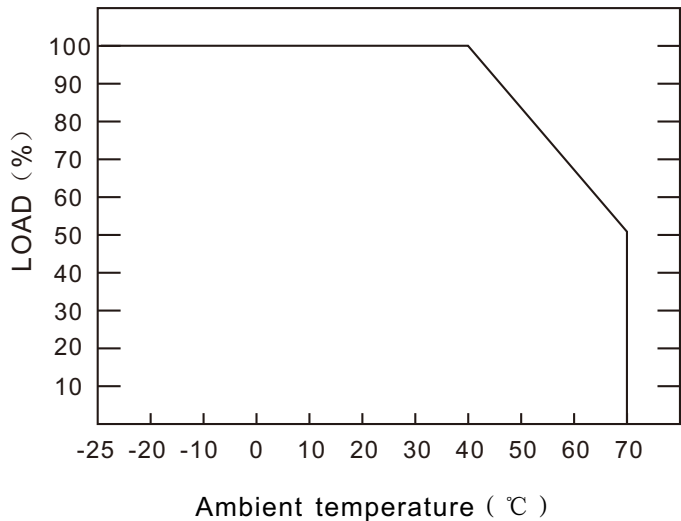

■ Static Characteristics

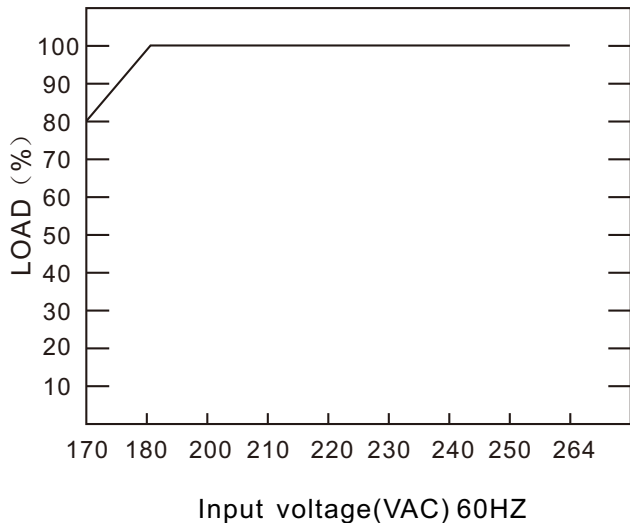

The above is Taurus standard product, customized product is available. We TAURAS has the right to ultimate interpretation.

Designed by		Standardization		D0922 type	Version: 2.0
Corrected by		Approved by		 珠海市金兴科技有限公司 ZHUHAI TAURAS TECHNOLOGIES CO., LTD	
Checked by					