

SP.ace™

METAL STRIP CEILING • SCREENS • SUN LOUVERS



TAPERED BOX LOUVRES

WITH STANDARD / CUSTOM / BESPOKE



Tough &
Durability



Thermal
Efficiency



Recyclable
& Hygienic



Environmental
Friendly

SERIES 08

TAPEREDBOXLOUVRES



SPACE TAPERED BOX SYSTEM

Standard/Custom/Bespoke

Series 08 VTS 100 / 150 / 200 is the natural extension of the Box Louvres Series but with an added bevelled edge to achieve a slim shadow line in response to today's performance demanding & fashion conscious Designer. The standard VTS 100 & 200 series is highly customisable to the individual demands of each project to deliver outstanding results.

Further than that, our finely tuned Bespoke Series is specially crafted for the most discerning of Designers, who demand unparalleled expressions of aesthetics & function in their facades to celebrate their creative uniqueness.

System

Proprietary louvres system consisting of 0.5mm to 1.0mm thk. bevelled box shaped panel, holder, end caps. Available in various modules to meet individual specifications or highly bespoke to order.



SERIES 08

FEATURES


- A fashionable architectural statement •
- Unique beveled box shaped panels •
- Slim profile and stylish shadow line •
- Standard, customized or highly bespoke •
- Can be retro-fitted or incorporated in to a new project •
- Available in a large range of premium colours including powder coat or PVF2 finishes •

SIDE ELEVATION PLAN


SERIES 8VTS

100 / 150 / 200


Cross View Panel
(SERIES 8VTS 100)

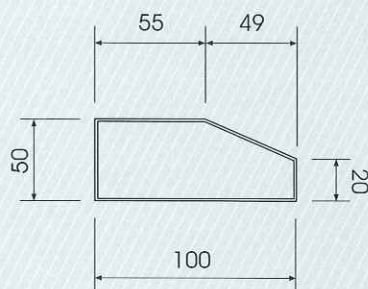

Cross View Panel
(SERIES 8VTS 150)

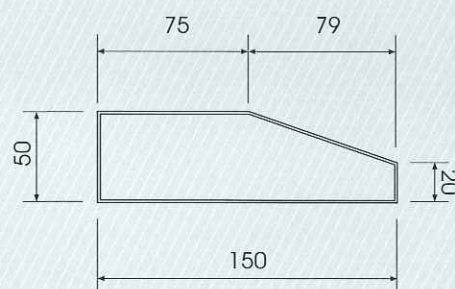

Cross View Panel
(SERIES 8VTS 200)

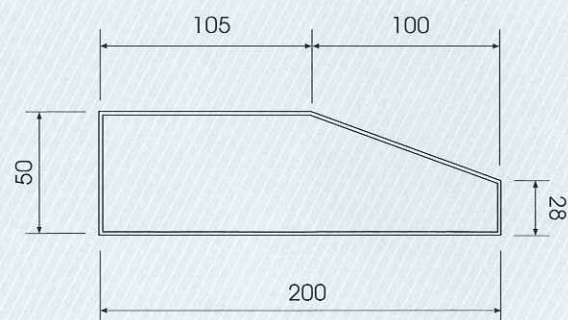

PRODUCT PROPERTY SPECIFICATION



		PROFILE	SERIES 8VTS	
PRODUCT PROPERTY SPECIFICATION	100	MATERIAL	ALUMINIUM	Not exceed 1500mm c/c below 10m height from ground Not exceed 1000mm c/c for above 10m height from ground
		PANEL SIZE	100mm effective width	
		THICKNESS	0.55mm TCT	
	150	MATERIAL	ALUMINIUM	
		PANEL SIZE	150mm effective width	
		THICKNESS	0.70mm -1.00mm TCT	
	200	MATERIAL	ALUMINIUM	
		PANEL SIZE	200mm effective width	
		THICKNESS	0.7mm - 1.00mm TCT	

REMARK : We reserve the right to change all specification of the products and accessories without prior notice.

TYPICAL INSTALLATION PLAN

SERIES 8VTS



100 / 150 / 200

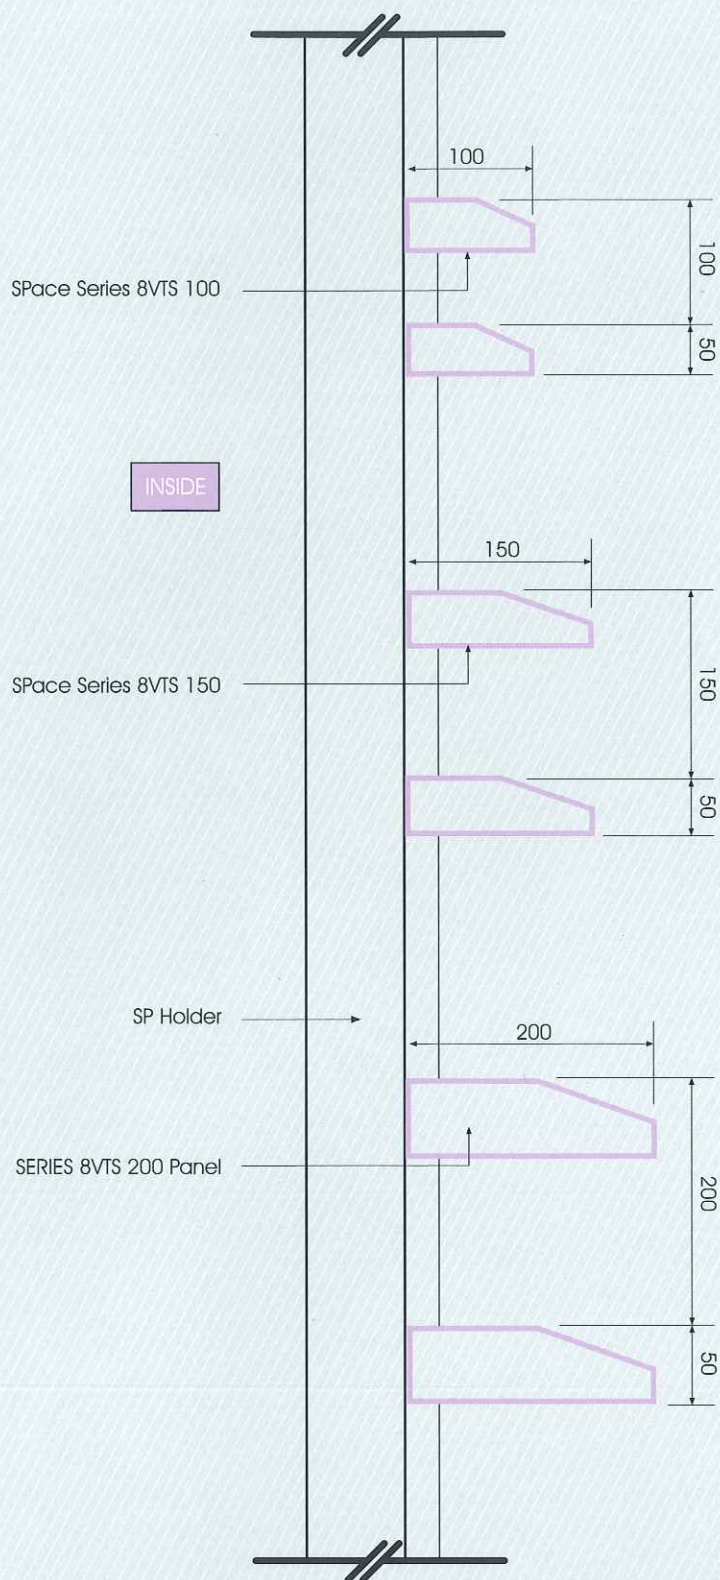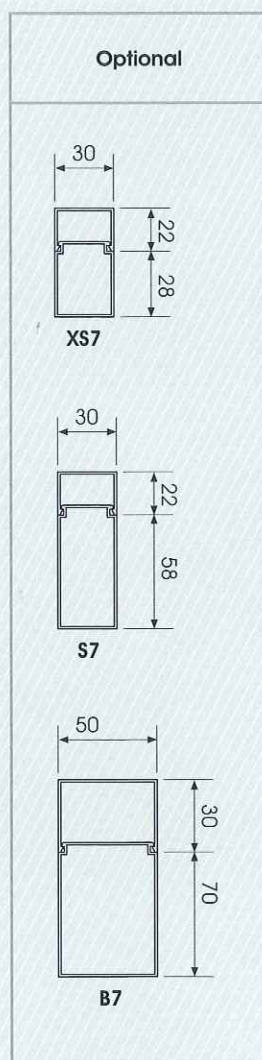

Typical Drawing
 (SERIES 8VTS 100 / 150 / 200)

TYPICAL INSTALLATION PLAN

SERIES 8VTS

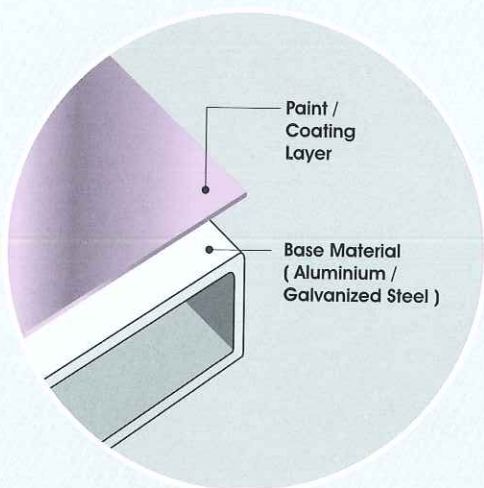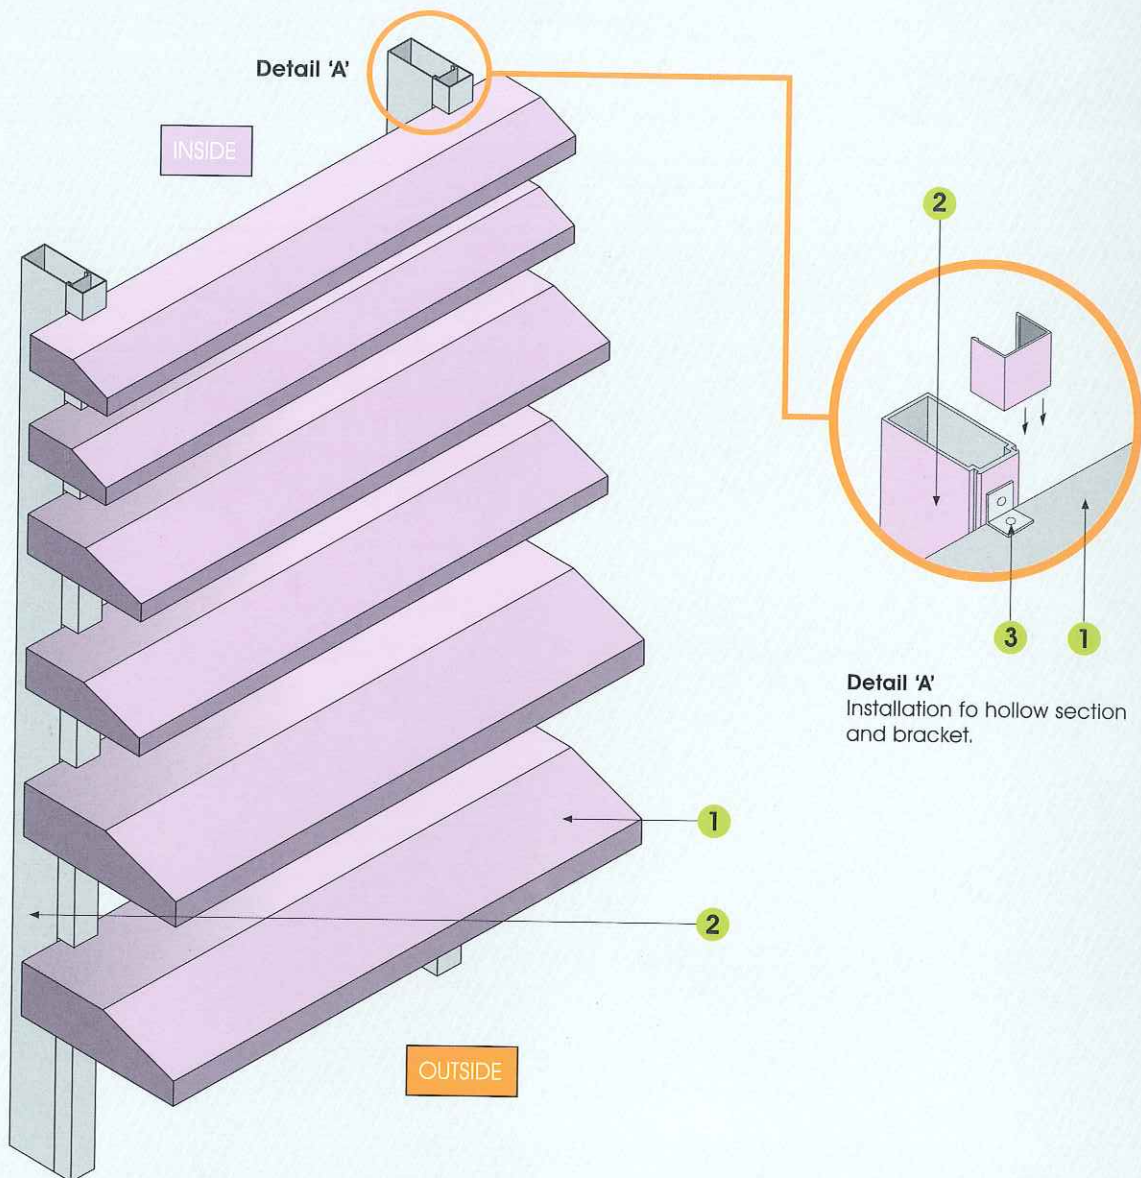

Detail Drawing of the layering of coating and the material base

NOTE	
1	Series 8 VTS Panel
2	SP Holder (XS7/S7/B7)
3	L Bracket (By Others)

PAINT SYSTEM/COATINGS

Polyester Coating (Standard)

Approximately 20 microns thick coating providing excellent surface protection and finish.

Powder Coating (Standard)

Minimum 60 microns thick coating providing excellent surface protection and finish.

PVF2 (Premium)

KYNAR 500® fluorocarbon coating system with 20 years warranty against colour fading, chalking and delamination.