

# HF165FD-G

# MINIATURE HIGH POWER RELAY



File No.: E134517



File No.: 40043143



File No.: CQC15002130956



## Features

- 40A switching capability
- Breakdown voltage (between contact and coil): 4kV
- Creepage distance: 5.5mm
- Plastic sealed and flux proofed types available
- Product in accordance to IEC 60335-1 available
- UL insulation system: Class F
- Environmental friendly product (RoHS compliant)
- Outline Dimensions: (32.2 x 27.5x 20.4) mm

## CONTACT DATA

Contact arrangement	1A
Contact resistance	100mΩ max. (at 1A 6VDC)
Contact material	AgSnO <sub>2</sub>
Contact rating (Res. load)	40A 277VAC
Max. switching voltage	277VAC
Max. switching current	40A
Max. continuous current <sup>1)</sup>	30A
Max. switching power	11080VA
Mechanical endurance	1 x 10 <sup>7</sup> OPS
Electrical endurance <sup>2)</sup>	1 x 10 <sup>4</sup> OPS (NO: 40A 277VAC, Resistive load, Room temp., 1s on 9s off, Flux proofed)

**Notes:** 1) Long time current-carrying under 40A condition is prohibited.  
2) For plastic sealed type, the venting-hole should be opened in electrical endurance test.

## CHARACTERISTICS

Insulation resistance	1000MΩ (at 500VDC)
Dielectric strength	Between open contacts 1500VAC 1min
	Between coil & contacts 2500VAC 1min(Standard) 4000VAC 1min(V Type)
Surge voltage	6kV (1.2/50μs)
Operate time (at nomi. volt.)	15ms max.
Release time (at nomi. volt.)	10ms max.
Shock resistance	Functional 98m/s <sup>2</sup>
	Destructive 980m/s <sup>2</sup>
Vibration resistance	10Hz to 55Hz 1.5mm DA
Humidity	5% to 85% RH
Ambient temperature	-40°C to 85°C
Termination	PCB
Unit weight	Approx. 25g
Construction <sup>2)</sup>	Plastic sealed Flux proofed

**Notes:** 1) The data shown above are initial values.

## COIL

Coil power Approx. 900mW

## COIL DATA

at 23°C

Nominal Voltage VDC	Pick-up Voltage VDC max.	Drop-out Voltage VDC min.	Max. Voltage VDC <sup>1)</sup>	Coil Resistance Ω
5	3.75	0.5	6.5	27 x (1±10%)
6	4.50	0.6	7.8	40 x (1±10%)
9	6.75	0.9	11.7	97 x (1±10%)
12	9.00	1.2	15.6	155 x (1±10%)
15	11.25	1.5	19.5	256 x (1±10%)
18	13.50	1.8	23.4	380 x (1±10%)
24	18.00	2.4	31.2	660 x (1±10%)
48 <sup>2)</sup>	36.00	4.8	62.4	2560 x (1±10%)
70 <sup>2)</sup>	52.50	7.0	91.0	5500 x (1±10%)
110 <sup>2)</sup>	82.50	11.0	143.0	13450 x (1±10%)

**Notes:** 1) Maximum voltage refers to the maximum voltage which relay coil could endure in a short period of time.

2) For products with rated voltage ≥ 48V, measures should be taken to prevent coil overvoltage in order to protect coil in test and application (eg. Connect diodes in parallel).

## SAFETY APPROVAL RATINGS

UL/CUL	NO	40A 277VAC 40°C
		30A 277VAC 85°C
VDE	NO	2HP 240VAC/1HP 120VAC 40°C
		96LRA, 30FLA 40°C
		TV-8 125VAC 40°C
		40A 250VAC

**Notes:** 1) All values unspecified are at room temperature.

2) Only typical loads are listed above. Other load specifications can be available upon request.



ISO9001、ISO/TS16949、ISO14001、OHSAS18001、IECQ QC 080000 CERTIFIED

2017 Rev. 1.00

## ORDERING INFORMATION

Type	HF165FD-G /12 -H Y1 S T F V (XXX)						
Coil voltage	5, 6, 9, 12, 15, 18, 24, 48, 70, 110						
Contact arrangement	H: 1 Form A						
Termination	Y1: Without Pin NO.6		Y2: With Pin NO.6				
Construction <sup>1)</sup>	S: Plastic sealed			Nil: Flux proofed			
Contact material	T: AgSnO <sub>2</sub>						
Insulation standard	F: Class F						
Dielectric strength standard	Nil: Standard product(2500VAC Between coil & contacts)						
	V : High Dielectric strength(Only for Y1 Termination) (4000VAC Between coil & contacts)						
Special code <sup>2)</sup>	XXX: Customer special requirement			Nil: Standard			


Notes: 1) We recommend flux proofed types for a clean environment (free from contaminations like H<sub>2</sub>S, SO<sub>2</sub>, NO<sub>2</sub>, dust, etc.). We suggest to choose plastic sealed types and validate it in real application for an unclean environment (with contaminations like H<sub>2</sub>S, SO<sub>2</sub>, NO<sub>2</sub>, dust, etc.).  
2) The customer special requirement express as special code after evaluating by Hongfa. e.g.(335) stands for product in accordance to IEC 60335-1 (GWT).

## OUTLINE DIMENSIONS, WIRING DIAGRAM AND PC BOARD LAYOUT

Unit: mm


Outline Dimensions

HF165FD-G/□□-HY1□□□□

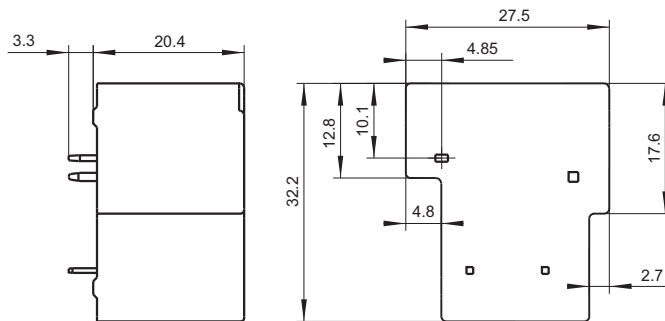


PCB Layout (Bottom view)


HF165FD-G/□□-HY1□□□□

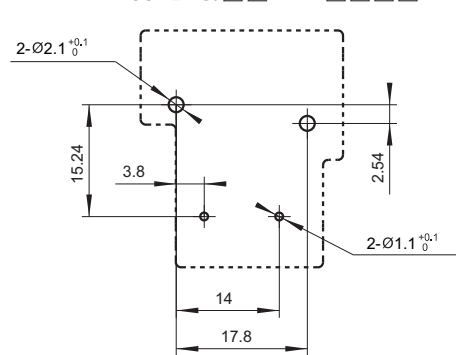

HF165FD-G/□□-HY2□□□□

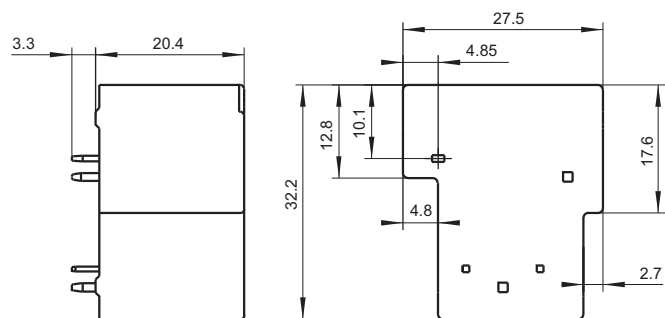


HF165FD-G/□□-HY2□□□□

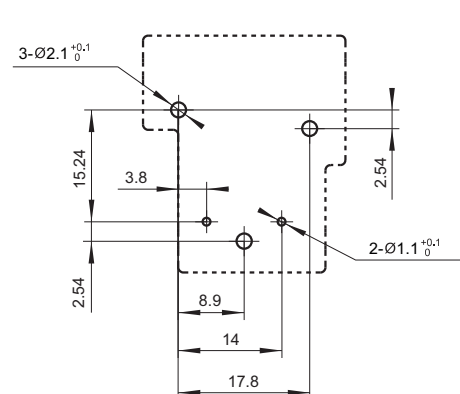


Wiring Diagram (Bottom view)

HF165FD-G/□□-HY1□□□□




HF165FD-G/□□-HY2□□□□



- Remark: 1) In case of no tolerance shown in outline dimension: outline dimension  $\leq 1\text{mm}$ , tolerance should be  $\pm 0.2\text{mm}$ ; outline dimension  $> 1\text{mm}$  and  $\leq 5\text{mm}$ , tolerance should be  $\pm 0.3\text{mm}$ ; outline dimension  $> 5\text{mm}$ , tolerance should be  $\pm 0.4\text{mm}$ .  
 2) The tolerance without indicating for PCB layout is always  $\pm 0.1\text{mm}$ .  
 3) The width of the gridding is 2.5mm.

**CHARACTERISTIC CURVES**

MAXIMUM SWITCHING POWER

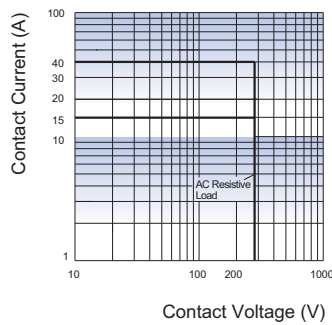

**Disclaimer**

The specification is for reference only. See to "Terminology and Guidelines" for more information. Specifications subject to change without notice. We could not evaluate all the performance and all the parameters for every possible application. Thus the user should be in a right position to choose the suitable product for their own application. If there is any query, please contact Hongfa for the technical service. However, it is the user's responsibility to determine which product should be used only.