





本产品符合最新国标《电动汽车传导充电用连接装置》符合国标GB/T20234.2-2015要求


The product comply with the latest national standard GB/T20234.2-2015 "Electric Vehicle Charging Connection device"

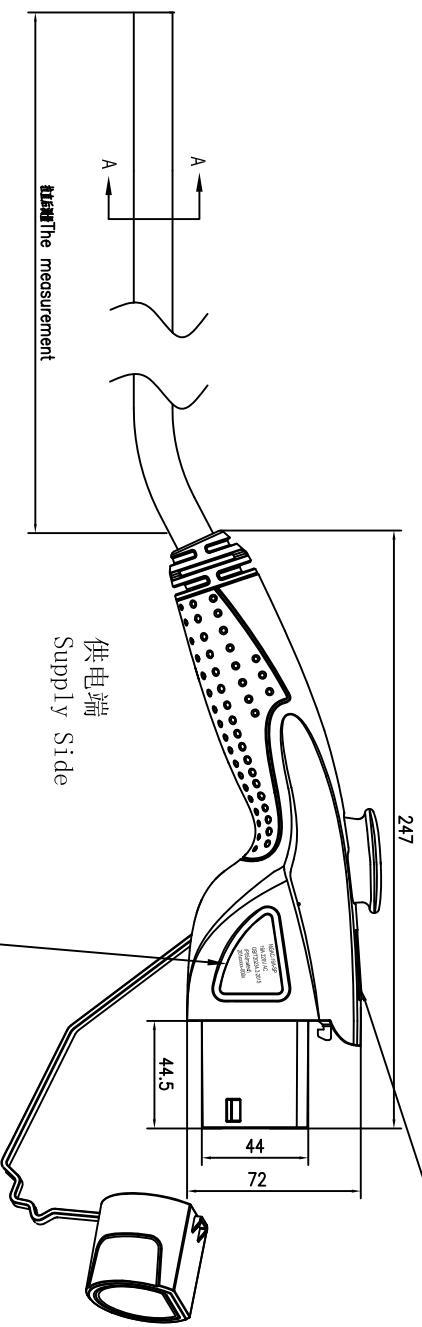

供电端第一圈激光打标内容(GB/T20234.2-2015 4.2.2.1)如下:
The laser marking content (Detail) of supply side is the following:
MGAC-32A-TIP
32A 440V AC
GB/T20234.2-2015
IP55(rated)
201xxxx-000x

供电端第二圈激光打标内容(GB/T20234.2-2015 4.2.2.2)如下:
The laser marking content of supply side is the following:
DEGSON

黑色 Black (6mm ²)	L3
灰色 Grey (6mm ²)	L2
棕色 Brown (6mm ²)	L1
蓝色 Blue (6mm ²)	N
黄/绿 Yellow /Green (6mm ²)	PE
White (0.75mm ²)	CC
	CP

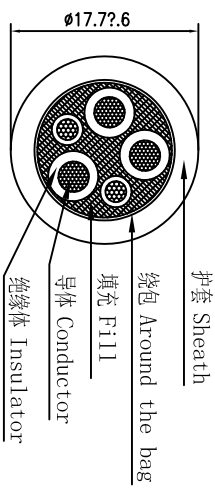

国际供电端接线图
National standard of power supply wiring diagram

技术参数 Technical parameters

额定电压 Rated voltage	440V AC
额定电流 Rated current	32A
温度范围 Temperature range	-30℃~+50℃
绝缘电阻 Insulate resistance	>10MΩ, 1000V DC
耐压电压 Bear voltage	L、N与PE >2500V AC L与PE >2500V AC
防护等级 Ingress protection	IP55 (Rated)
插拔次数 The insertion/pullout times	10000 次
插拔力 Insertion/pullout force	<100N
标准 Standard	GB/T 20234.2-2015

Customer Drawing

线性尺寸范围 . XX	. X	PLASTIC DRAWING FRAME	MATERIAL:	SURFACE FINISH:
0-6	± 0.05	PART NO.:	宁波高松电子有限公司 NINGBO DEGSON ELECTRICAL CO.,LTD	
6-30	± 0.1	APPD:	NAME: 国际交流供电端充电枪 (32A三相) National standard AC supply charging connection (32A three-phase)	
30-120	± 0.15	CHKD:	TITLE: 接线图 Wiring diagram	
120-400	± 0.2	DRFT:	DRAWING NO.:	SHEET 1/1
400-1000	± 0.3	THIRD ANGLE PROJECTION	MM	SCALE 3/1
1000-2000	± 0.5		INCH	
角度尺寸范围 . XX	. X			
± 0.5	± 1°			