

REVISION RECORD			
REV	ECN	DESCRIPTION	DRFT DATE

NOTES1:

- 1. Rated voltage/current : 300V / 10A
- 2. Withstanding voltage : AC1600V/1Min.
- 3. Torque value : M2 , 1.77Lb.in
- 4. Wire range : 30~16AWG

IEC Standard

1.	Pollution degree	2	2	3
	Overvoltage category	II	III	III
	Rate impulse voltage(kV)	2.5KV	2.5KV	2.5KV
	Rate voltage(V)	125V	250V	250V
	Rate current(A)			8A


- 2. Torque value : M2 , 0.2N·m
- 3. Wire range : 1.5mm²

NOTES2:






- 1. Dimension shall be interpreted per ASME Y14.5-2009
- 2. Pitch : 3.5mm, Poles : N=02~24P
- 3. Stripping length : 6~7mm
- 4. Operating temperature: -40°C~+105°C
- 5. Undimensioned tolerances:

Pitch	range		In	Nominal dimension		range	- /	/ □
	Over	Under		Over	Under			
mm	6	10	TO	30	60	100	150	0.1/10
	TO	TO	TO	TO	TO	TO	TO	≤
	6	10	24	30	60	100	150	±2°
	+0.15/+0.20 ±0.30 ±0.50 ±0.70 ±1.00 ±1.30							

6. RoHS Compliance

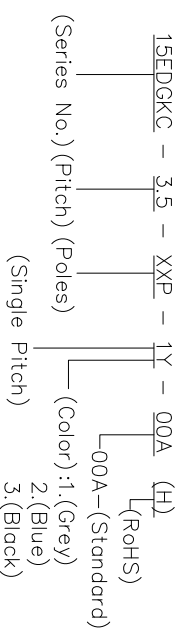

02~06P have this card point

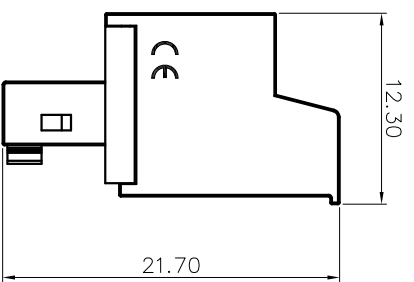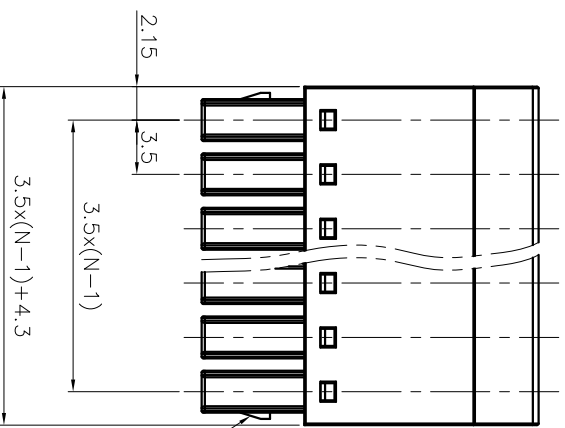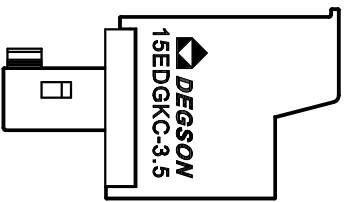

DETACHED LISTS			
PART NO.:	/	NAME:	DEGSON NINGBO DEGSON ELECTRICAL CO., LTD 宁波高松电子有限公司
APPD.:	/	TITLE:	CUSTOMER DRAWING
CHKD.:	/	DRAWING NO.:	/
DRFT.:	/	REV	DO
THIRD ANGLE PROJECTION		SHEET	1/1
		SCALE	1:1