

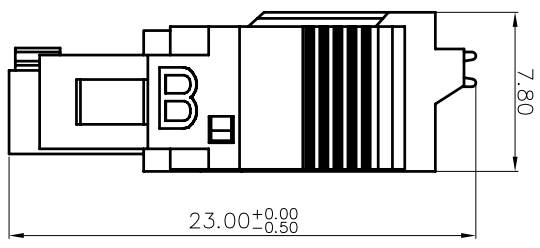
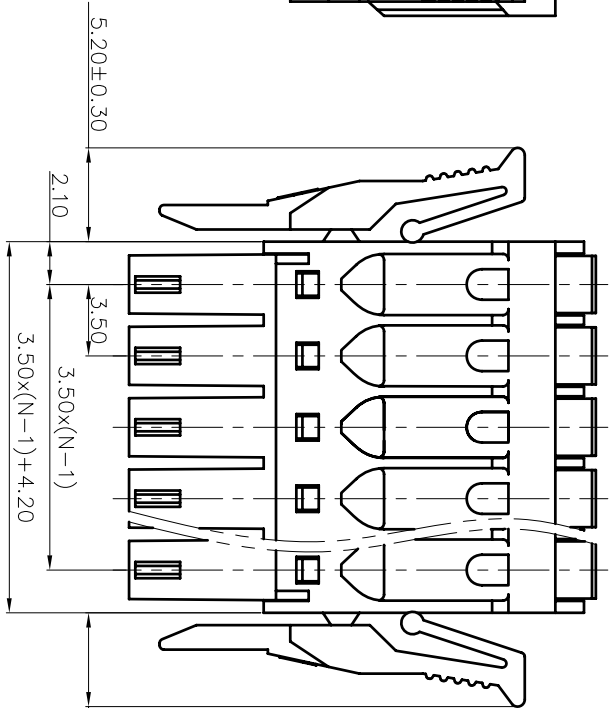
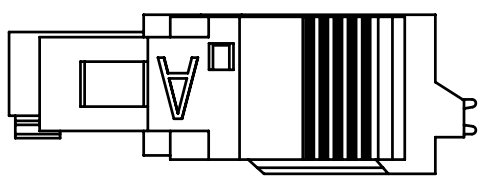
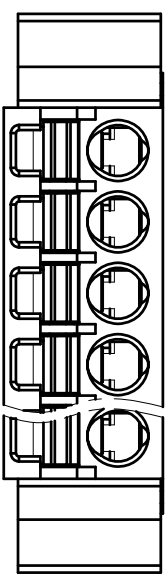


REVISION RECORD			
REV	ECN	DESCRIPTION	DRFT DATE



15EDGKNG - 3.5 - XXP - 1Y - 00A (H)  
 (Series No.) (Pitch) (Poles) (Single Pitch) (Color): 1.(Grey)  
 2.(Blue)  
 3.(Black)  
 4.(Green)  
 5.(Orange)  
 6.(Red)  
 7.(Transparent)  
 8.(Yellow)  
 9.(White)

NOTES1:  
 UL Standard

1. Rated voltage/current : 300V / 8A
2. Withstanding voltage : AC1600V/Min.
3. Wire range : 28~16AWG

Pollution degree	2
Overvoltage category	II
Rate impulse voltage(KV)	2.5KV
Rate voltage(V)	250V
Rate current(A)	8A

2. Wire range : 0.2~1.0mm<sup>2</sup>

NOTES2:

1. Dimension shall be interpreted per ASME Y14.5-2009
2. Pitch : 3.50mm, Poles : N=02~20P
3. Stripping length : 9~10mm
4. Operating temperature: -40°C~+105°C
5. Undimensioned tolerances:

Pitch range in mm	Nominal dimension in mm	range	tolerance					
Over 6	Over 10	Over 30	Over 60	Over 100	Over 150	Over 1.0	Over 1.50	
TO 10	TO 10	TO 10	TO 10	TO 10	TO 10	±0.1/10	±0.1/10	
6	10	24	30	60	100	150	±2'	
±0.15/±0.20/±0.30/±0.30/±0.50/±0.70/±1.00/±1.30							±2'	±2'

6. RoHS Compliance

DETACHED LISTS			
PART NO.:	/	NAME:	DEGSON <sup>®</sup> NINGBO DEGSON ELECTRICAL CO., LTD 宁波高松电子有限公司
APPD.:	/	CHKD.:	/
DRFT.:	/	TITLE:	CUSTOMER DRAWING
THIRD ANGLE PROJECTION		DRAWING NO.:	/
		DO NOT SCALE DRAWING	SCALE
			1:1