





REVISION RECORD				
REV	ECN	DESCRIPTION	DRFT	DATE

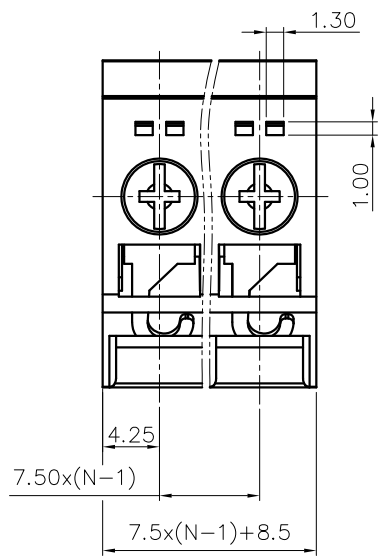

NOTES1:
 UL Standard
 1.Rated Voltage/Current : 300V / 10A
 2.Torque Value : M3 , 4.43Lb.in
 3.Wire Range : 24~14AWG
 IEC Standard
 1.Rated Voltage/Current : 800V / 24A
 2.Torque Value : M3 , 0.5N·m
 3.Wire Range : 0.5~2.5mm²

NOTES2:
 1.Dimension shall be interpreted per ASME Y14.5-2009
 2.Pitch : 7.50mm, Poles : N=02~03P
 3.Stripping length : 8~10mm
 4.Withstanding Voltage : AC3500V/1Min.
 5.Operating temperature: -40°C~+105°C
 6.Undimensioned Tolerances:

Pitch range in mm		Nominal dimension range in mm						0.1/10
TO	Over	TO	Over	TO	Over	TO	Over	±
6	6 TO 10	10	10 TO 24	30	30 TO 60	60	60 TO 100	
±0.15	±0.20	±0.30	±0.30	±0.50	±0.70	±1.00	±1.30	±2*

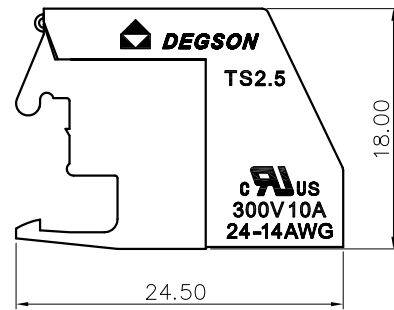

7.RoHS Compliance

TS 2.5 - XXP - 1Y - 00A (H)
 (Series No.) (Poles) (Single Pitch) (Color) : 1.(Grey)
 2.(Blue)
 3.(Black)
 4.(Green)
 5.(Orange)
 6.(Red)
 7.(Transparent)
 8.(Yellow)
 9.(White)

DETACHED LISTS	PART NO.:	/			
	APPD:	/			
	CHKD:	/			
	DRFT:	/			
	THIRD ANGLE PROJECTION		DRAWING NO.:		/
		MM (INCH)		DO NOT SCALE DRAWING	SCALE
				REV	DO
				SHEET	1/1
				SCALE	1:1

宁波高松电子有限公司
DEGSON NINGBO DEGSON ELECTRICAL CO., LTD

TS 2.5-XXP-1Y-00A(H)

TITLE: CUSTOMER DRAWING

DRAWING NO.:

MM (INCH)

DO NOT SCALE DRAWING

REV

DO

SHEET

SCALE