





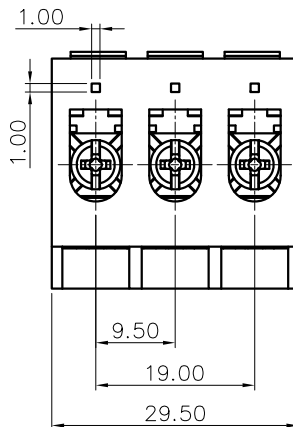


REVISION RECORD				
REV	ECN	DESCRIPTION	DRFT	DATE

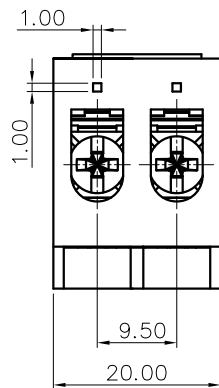

02P



03P

NOTES1:

UL Standard

- 1. Rated Voltage/Current : 600V / 10A
- 2. Torque Value : M3.5 , 7.02Lb.in
- 3. Wire Range : 20~12AWG


IEC Standard

- 1. Rated Voltage/Current : 250V / 24A
- 2. Torque Value : M3.5 , 0.8N·m
- 3. Wire Range : 0.5~2.5mm²

NOTES2:

- 1. Dimension shall be interpreted per ASME Y14.5-2009
- 2. Pitch : 9.50mm, Poles : N=02~03P
- 3. Stripping length : 8~10mm
- 4. Withstanding Voltage : AC2000V/1Min.
- 5. Operating temperature: -40°C~+105°C
- 6. Undimensioned Tolerances:

Pitch range in mm	Nominal dimension range in mm						-	r	D
	Over TO	Over TO	Over TO	Over TO	Over TO	Over TO			
6 TO 10	6 TO 10	10 TO 24	30 TO 30	60 TO 60	100 TO 100	150 TO 150	0.1/10		
	±0.15	±0.20	±0.30	±0.30	±0.50	±0.70	±1.00	±1.30	±2'



7. RoHS Compliance

TSB 2.5 - XXP - 1Y - 00A (H)

(Series No.) (Poles) (Single Pitch) (Color): 1.(Grey)
 2.(Blue)
 3.(Black)
 4.(Green)
 5.(Orange)
 6.(Red)
 7.(Transparent)
 8.(Yellow)
 9.(White)

DETACHED LISTS	PART NO.:	/			
	APPD:	/			
	CHKD:	/			
	DRFT:	/			
	<p>THIRD ANGLE PROJECTION</p>		<p>DO NOT SCALE DRAWING</p>		
<p>DRAWING NO.:</p>		/		<p>REV</p>	<p>DO</p>
<p>MM (INCH)</p>		<p>SCALE</p>		<p>SHEET</p>	<p>1/1</p>
		<p>1:1</p>			

宁波高松电子有限公司
DEGSON NINGBO DEGSON ELECTRICAL CO., LTD

NAME: TSB 2.5-XXP-1Y-00A(H)

TITLE: CUSTOMER DRAWING

DRAWING NO.: / SHEET 1/1

SCALE 1:1