


REVISION RECORD				
REV	ECN	DESCRIPTION	DRFT	DATE



NOTES1:

UL Standard

1. Rated Voltage/Current : 600V / 10A
2. Torque Value : M3 , 4.43Lb.in
3. Wire Range : 30~12AWG

IEC Standard

1. Rated Voltage/Current : 750V / 10A
2. Torque Value : M3 , 0.5N·m
3. Wire Range : 0.2~4mm²

NOTES2:




1. Dimension shall be interpreted per ASME Y14.5-2009
2. Poles : N=01P
3. Stripping length : 8~9mm
4. Withstanding Voltage : AC3000V/1Min.
5. Operating temperature : -40°C~+105°C
6. Undimensioned Tolerances:

Pitch range in mm		Nominal dimension range in mm					-	∩	∇
TO	Over	TO	Over	TO	Over	TO	Over	TO	
6	10	10	24	30	60	100	150	0.1/10	
±0.15	±0.20	±0.30	±0.30	±0.50	±0.70	±1.00	±1.30	±2*	

7. RoHS Compliance

TSCBF4 - 01P - 1Y - 00A (H)

(Series No.) (Poles) (Single Pitch) (Color): 1.(Grey)
 2.(Blue)
 3.(Black)
 4.(Green)
 5.(Orange)
 6.(Red)
 7.(Transparent)
 8.(Yellow)
 9.(White)

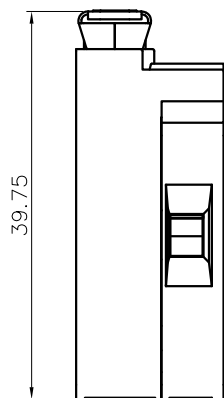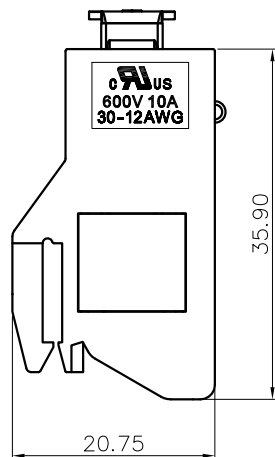

DETACHED LISTS	PART NO.:	/			宁波高松电子有限公司 NINGBO DEGSON ELECTRICAL CO., LTD	
	APPD:	/	NAME: TSCBF4-01P-1Y-00A(H)			
	CHKD:	/	TITLE: CUSTOMER DRAWING			
	DRFT:	/	DRAWING NO.:		REV	DO
THIRD ANGLE PROJECTION		DO NOT SCALE DRAWING		SHEET	1/1	
		MM (INCH)		SCALE	1:1	