

REVISION RECORD

REV	ECN	DESCRIPTION	DRFT	DATE
-----	-----	-------------	------	------

NOTES1:

UL Standard

- 1.Rated voltage/current : 300V / 10A
- 2.Withstanding voltage : AC1600V/1Min.
- 3.Torque value : M3 , 4.43Lb.in
- 4.Wire range : 30~10AWG

IEC Standard

1. Pollution degree	2
Overvoltage category	III
Rate impulse voltage(KV)	4.0KV
Rate voltage(V)	400V
Rate current(A)	6A

- 2.Torque value : M3 , 0.5N·m
- 3.Wire range : 0.2~6mm<sup>2</sup>


NOTES2:

- 1.Dimension shall be interpreted per ASME Y14.5-2009
- 2.Pitch : 12.2mm, Poles : N=01P
- 3.Stripping length : 8mm
- 4.Operating temperature: -40°C~+105°C
- 5.Undimensioned tolerances:






Pitch range in mm		Nominal dimension range in mm				-	∩	∇
TO	Over TO	Over TO	TO	Over TO	Over TO	Over TO	0.1/10	
6	10	10	24	30	60	100	150	
±0.15	±0.20	±0.30	±0.30	±0.50	±0.70	±1.00	±1.30	±2*

6.RoHS Compliance

DG4F - 01P - 1Y - 00A (H)  
 (Series No.) (Poles) (Single Pitch) (Color): 1.(Grey)  
 2.(Blue)  
 3.(Black)  
 4.(Green)  
 5.(Orange)  
 6.(Red)  
 7.(Transparent)  
 8.(Yellow)  
 9.(White)

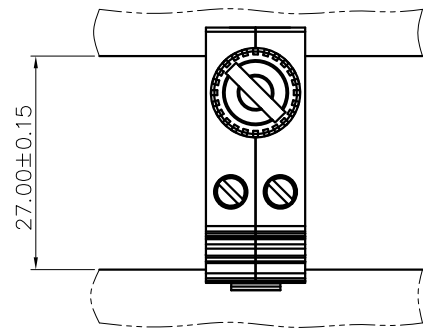

Card slot size VIEW

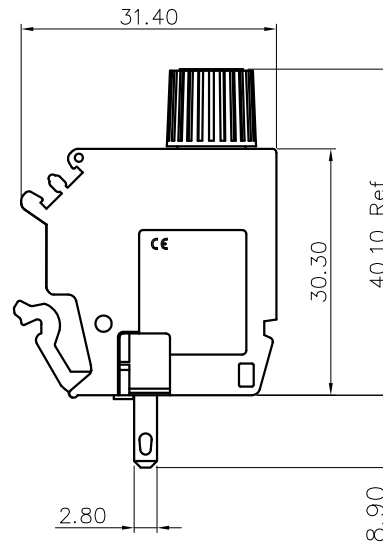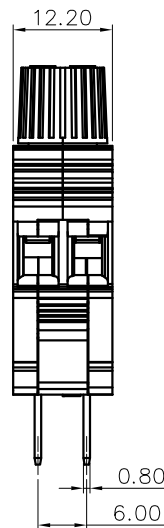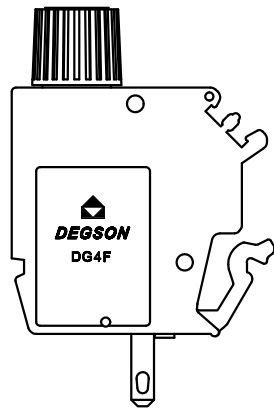

DETACHED LISTS	PART NO.:	/											
	APPD:	/											
	CHKD:	/											
	DRFT:	/											
	<p>THIRD ANGLE PROJECTION</p>		<p>MM (INCH)</p>		DO NOT SCALE DRAWING								
<p>NINGBO DEGSON ELECTRICAL CO., LTD</p>		<p>DG4F-01P-1Y-00A(H)</p>		<table border="1"> <tr> <td>TITLE: CUSTOMER DRAWING</td> <td>REV</td> <td>DO</td> </tr> <tr> <td>DRAWING NO.:</td> <td>SHEET</td> <td>1/1</td> </tr> <tr> <td>SCALE</td> <td>1:1</td> <td></td> </tr> </table>	TITLE: CUSTOMER DRAWING	REV	DO	DRAWING NO.:	SHEET	1/1	SCALE	1:1	
TITLE: CUSTOMER DRAWING	REV	DO											
DRAWING NO.:	SHEET	1/1											
SCALE	1:1												