

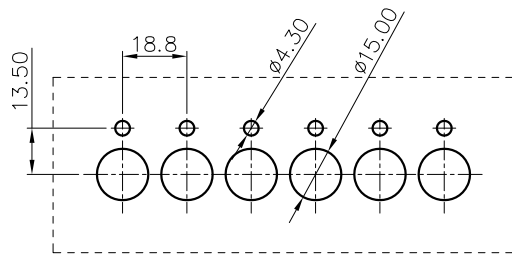
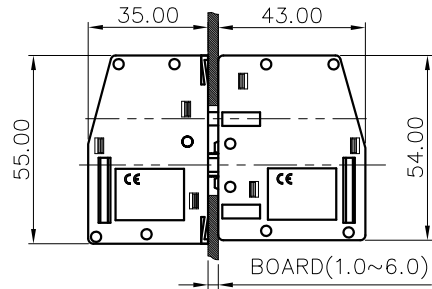



REVISION RECORD				
REV	ECN	DESCRIPTION	DRFT	DATE



PCB LAYOUT

DGH50J-01P-1Y-00A(H)



NOTES1:

UL Standard

1. Rated voltage/current : 600V / 170A
2. Withstanding voltage : AC2200V/1Min.
3. Torque value : M6 , 53.16Lb.in
4. Wire range : 6~2AWG

IEC Standard

1. Pollution degree	3
Overvoltage category	III
Rate impulse voltage(KV)	8.0KV
Rate voltage(V)	1000V
Rate current(A)	150A

2. Torque value : M6 , 6.0N·m
3. Wire range : 16~50mm²





NOTES2:

1. Dimension shall be interpreted per ASME Y14.5-2009
2. Pitch : 18.8mm, Poles : N=01P
3. Stripping length : 24mm
4. Operating temperature: -40°C~+105°C
5. Undimensioned tolerances:

Pitch Range In mm		Nominal Dimension Range In mm							
TO	Over	Over	TO	Over	Over	Over	0.1/10		
6	10	24	30	60	100	150			
±0.15	±0.20	±0.30	±0.30	±0.50	±0.70	±1.00	±1.30	±2°	

6. RoHS Compliance

DGH50K-01P-1Y-00A(H)

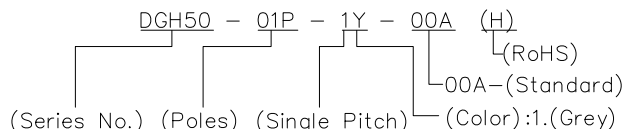

1. (Grey)
2. (Blue)
3. (Black)
4. (Green)
5. (Orange)
6. (Red)
7. (Transparent)
8. (Yellow)
9. (White)

DETACHED LISTS	PART NO.:	宁波高松电子有限公司 NINGBO DEGSON ELECTRICAL CO., LTD			
	APPD:	NAME: DGH50-01P-1Y-00A(H)			
	CHKD:	TITLE: CUSTOMER DRAWING			
	DRFT:	DRAWING NO.:		REV	D0
THIRD ANGLE PROJECTION		MM (INCH)	DO NOT SCALE DRAWING	SHEET	1/1
			SCALE	1:1	